




CTDO station data from the north east Atlantic from RRS *Discovery* Cruise 189

B A King S G Alderson S Bacon T J P Gwilliam C Hirst
R Paylor J F Read & J C Swallow

Report No 287 1991

FOR
REFERENCE ONLY

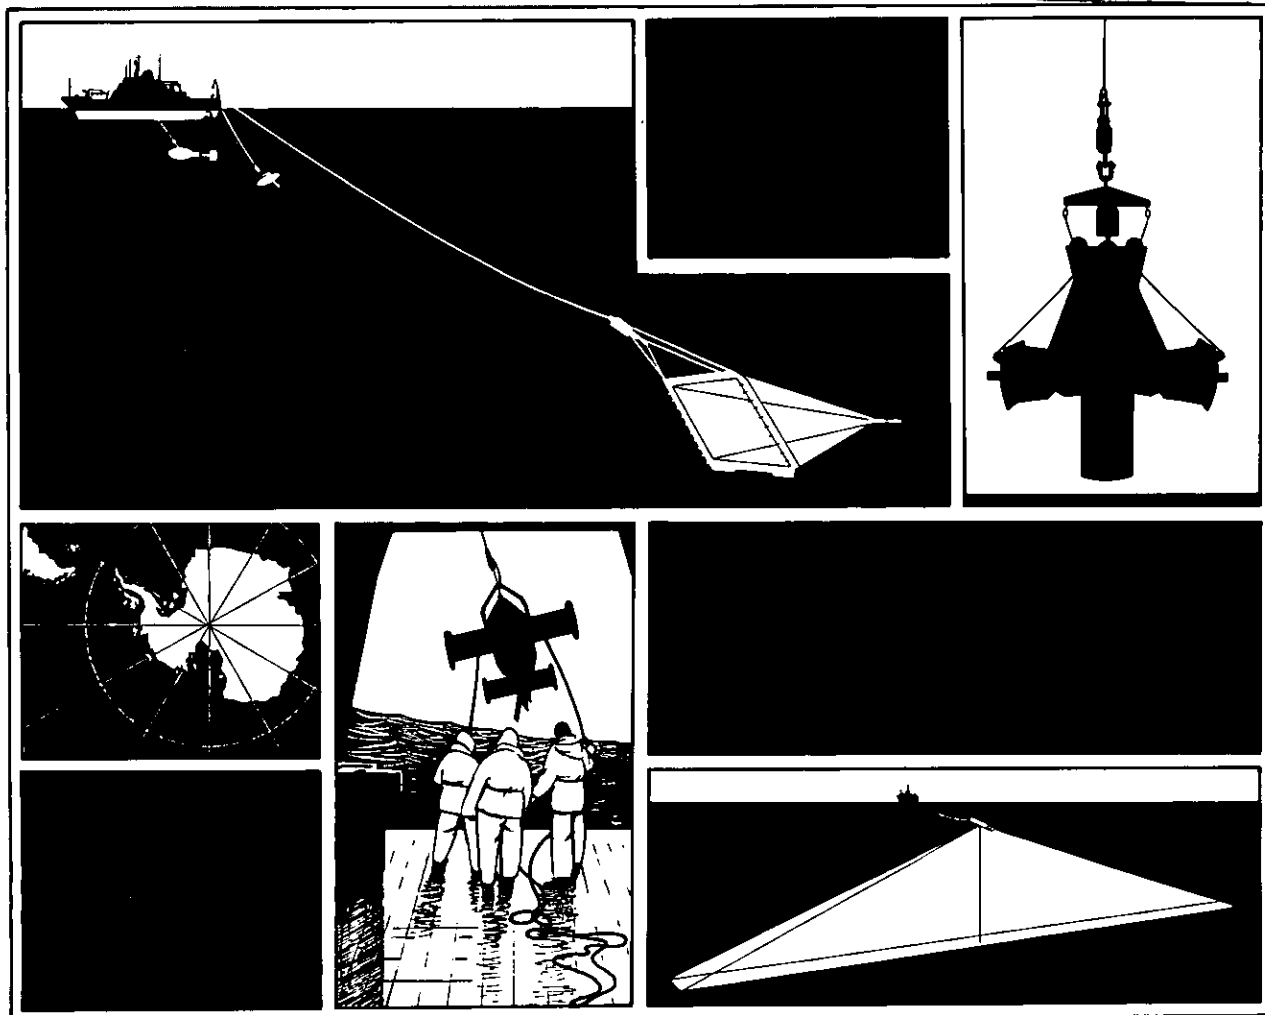

**INSTITUTE OF OCEANOGRAPHIC SCIENCES
DEACON LABORATORY**

**Wormley, Godalming,
Surrey, GU8 5UB, U.K.**

**Telephone: 0428 79 4141
Telex: 858833 OCEANS G
Telefax: 0428 79 3066**

Director: Dr. C.P. Summerhayes

Natural Environment Research Council

INSTITUTE OF OCEANOGRAPHIC SCIENCES


DEACON LABORATORY

REPORT NO. 287

CTDO station data from the north east Atlantic
from RRS *Discovery* Cruise 189

B.A. King, S.G. Alderson, S. Bacon, T.J.P. Gwilliam, C. Hirst,
R. Paylor, R.J. Read & J.C. Swallow

1991

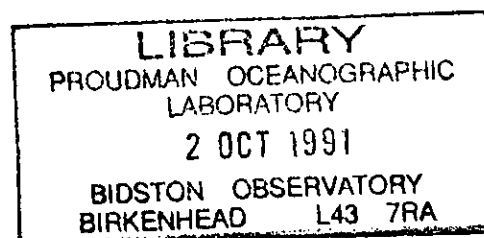

DOCUMENT DATA SHEET

<p>AUTHOR KING, B A, ALDERSON, S G, BACON, S, G WILLIAM, T J P, HIRST, C, PAYLOR, R, READ, J F & SWALLOW, J C</p>	<p>PUBLICATION DATE 1991</p>
<p>TITLE CTDO station data from the north east Atlantic from RRS <i>Discovery</i> Cruise 189.</p>	
<p>REFERENCE Institute of Oceanographic Sciences Deacon Laboratory, Report, No. 287, 182pp.</p>	
<p>ABSTRACT</p> <p>RRS <i>Discovery</i> Cruise 189 sailed from Cardiff on 9 March 1990 and docked in Barry on 8 April. CTD station data and SeaSoar data were collected in the Atlantic Ocean, north and east of 40°N 20°W; this report describes CTD station data only.</p> <p>Initially, three sections of full-depth CTD stations were occupied, along approximately 41.5°N (Iberian coast to 20°W), 20°W (41°N to 52°N) and 52°N (20°W to 15°W). Later, three north-south sections were occupied across the Bay of Biscay, along 8°25'W, 9°10'W and 9°55'W.</p> <p>Calibration and processing of CTD station data are described, and the data from 59 stations are presented as profile plots of temperature, salinity, oxygen, fluorescence and transmittance, with listings of CTD measurements and derived variables at standard levels. Selected variables are presented as contoured section plots. Salinity and oxygen measurements from water sample analysis are also listed.</p>	
<p>KEYWORDS ATLANTIC(NE) BISCAY BAY CTD OBSERVATIONS CTD PROFILERS DISCOVERY/RRS - cruise(1990)(189) SALINITY TEMPERATURE</p>	
<p>ISSUING ORGANISATION</p> <p style="text-align: center;"> Institute of Oceanographic Sciences Deacon Laboratory Wormley, Godalming Surrey GU8 5UB. UK Director: Colin Summerhayes DSc </p> <p style="text-align: right;"> Telephone Wormley (0428) 684141 Telex 858833 OCEANS G. Facsimile (0428) 683066 </p>	
<p>Copies of this report are available from: The Library, PRICE £42.00</p>	

<u>CONTENTS</u>	PAGE
CONTENTS	5
INTRODUCTION	7
COLLECTION AND ANALYSIS OF SAMPLE DATA	7
Introduction	7
Salinity	8
Temperature	8
Oxygen	8
Chlorophyll	10
Nutrients	10
COLLECTION AND PROCESSING OF CTD DATA	11
Introduction	11
Pressure	11
Temperature	12
Salinity	12
Oxygen	14
Chlorophyll	15
Transmittance	16
Processing path for CTD data	18
CTD data processing in program 'recal2'	20
LISTINGS AND PLOTS OF CTD AND SAMPLE DATA	22
Listings and profile plots	22
Section plots	23
ACKNOWLEDGEMENTS	23
REFERENCES	24
FIGURE 1 Cruise track for RRS Discovery Cruise 189	25
RRS DISCOVERY CRUISE 189 CTD STATION LIST	26
TABLES 1-10	27
FIGURES 2-5	36
PROFILE PLOTS AND DATA LISTINGS	40
SECTION PLOTS	158

1. INTRODUCTION

Cruise 189 of RRS Discovery Sailed from Cardiff on Friday 9 March 1990, and docked in Barry on Sunday 8 April. Individual project reports may be found in the Cruise Report (King et al., 1991). This report contains plots and tabulated listings of CTD and sample data collected during the cruise. A Cruise track is shown in Figure 1.

Cruise 189 was the second of a pair of cruises undertaken as part of a study of the circulation of the north-east Atlantic. Twelve months previously, Discovery Cruise 181 had covered a very similar cruise track (Pollard et al., 1989) with most Cruise 181 stations being reoccupied on Cruise 189. Departures from the Cruise 181 station positions in the northern part of the work area were occasioned by poor weather. One of the main purposes of undertaking a repeat cruise was to discover what could be learnt about the interannual variability of the characteristics of the upper ocean in the region. In addition to the CTD station data, approximately eight days of SeaSoar data were collected. These will be reported elsewhere.

Cruise 189 was scheduled immediately prior to a series of cruises forming part of the 1990 BOFS campaign, which were concentrated on the 20°W meridian. Chlorophyll measurements made during the cruise indicated that the spring phytoplankton bloom was already underway on the southern part of the 20°W section worked between 42°N and 53°N.

Towards the end of Cruise 189, a series of stations, amounting to three sections, was worked in the Bay of Biscay. The station positions were dictated by the requirements of the GASTOM experiment, coordinated by the EPSHOM, Brest, and by limitations imposed by the British and French authorities.

2. COLLECTION AND ANALYSIS OF SAMPLE DATA

Introduction

Water samples were collected using Niskin bottles mounted on a General Oceanics 12 bottle rosette. For stations 11965 and later, the multisampler system in use was a brand new 2.5 litre system. Difficulties on earlier stations with a 1.7 litre system are described in the Cruise Report (King et al., 1991). In general, duplicate samples were drawn for oxygen, salinity and nutrient analysis from all 12 bottles. Exceptions to this were some shallow stations where only six bottles were used, and stations 12018 and later, when only single oxygen samples were drawn.

Salinity

Salinity samples were analysed on either of two Guildline Autosals. One was a brand new model 8400A, the other an older model 8400. From time to time during the cruise, one or other salinometer showed signs of instability. Suggestions for the cause of this instability included noisy power supply, electromagnetic interference from the ship's engine/generator system, poor temperature control of the laboratory and disturbance from the ship's motion. However, no single explanation was found, and salinity analyses were performed on whichever salinometer was most stable at the time. The salinometers were standardised using P111 and P112 standard seawater.

Most of the samples were analysed by one of two operators, although two other operators analysed a number of samples to help clear backlogs. All operators had recently attended a training course on high quality salinometry and use of the Guildline Autosal given at IOSDL by the IAPSO Standard Seawater Service. This enabled standard practice to be adopted in such matters as frequency and quality of standardisation of the salinometers.

Approximately 1450 samples were analysed, including 617 duplicate pairs. Table 1 summarizes the differences between duplicates, indicating the quality of the sample measurements.

Temperature

Seven SIS Digital Reversing Thermometers (DRT) were used during the cruise. They were deployed as two pairs and one group of three.

The seven thermometers (two belonging to IOSDL and five to RVS) were calibrated at IOSDL before the cruise, and the following calibrations used

T204: $T=0.999750 \text{ Traw} + 0.0055$

T238: $T=0.999459 \text{ Traw} + 0.0017$

T207: $T=0.999584 \text{ Traw} + 0.0025$

T183: $T=0.999977 \text{ Traw} + 0.0040$

T179: $T=0.999341 \text{ Traw} + 0.0038$

T215: $T=0.999467 \text{ Traw} + 0.0034$

T156: $T=0.999817 \text{ Traw} - 0.0017$

Table 2 contains a comparison between pairs of thermometers mounted in the same reversing frame, and between thermometers and CTD values. On recovery during station 11993, during heavy seas, the frame containing the multisampler package struck the hydrographic platform. The CTD/thermometer comparison is split into data before and after the impact. Apparently only T179 suffered any significant change in calibration. This is illustrated by the partitioning of comparison pairs into early (ie before station 11993) and late (after 11993) pairs.

Two groups of thermometers have been split into measurements when the temperature was higher or lower than 3°C. This is to identify comparisons in the region where vertical temperature gradients are weakest and the best agreement may be expected.

Careful study of Table 2 shows that there are fewer CTD-DRT comparisons than DRT-DRT comparisons. This is because pairs differing by more than 0.015°C have been excluded from the analysis, and there are more such pairs in the CTD-DRT comparison, than DRT-DRT comparison. There were in fact, 25 instances of CTD-DRT differences greater than 15 millidegrees. Of these, 24 instances had DRT temperature corresponding to a shallower depth than CTD temperature, including three near-bottom instances when the CTD temperature was higher than the DRT temperature, but the in-situ temperature gradient was positive downwards (stations 11970, 11973, 11974). The conclusion was that on some occasions, the thermometer frames were reversing at significantly shallower depths than those at which the bottles were fired. Mid way through the cruise (after 31 out of 60 stations), the manner in which the thermometer lanyards were secured when loading Niskin bottles was modified. All but three of the CTD-DRT pairs worse than 15 millidegrees occurred in the first half, which demonstrates that the revised loading procedure considerably improved the performance of the reversing frames.

It is interesting to note that the means of the CTD-DRT comparisons are all negative, despite the fact that the CTD and all DRT's were calibrated at IOSDL before the cruise, and it is tempting to infer that, in addition to the obvious cases noted above, the thermometers were frequently making a measurement at a depth shallower than the CTD. However, splitting data before and after the change of loading procedure, which brings about such a reduction in the number pairs worse than 15 millidegrees, makes no discernible change to the bias of the remaining CTD-DRT data.

Oxygen

Oxygen samples were drawn into clear glass reagent bottles, and analysed according to the Winkler procedure. Apart from a couple of early stations, the titrations were performed using a semi-automatic endpoint determination system, borrowed from

UCNW, Bangor. The titration was performed manually, but the endpoint was determined from the output of a photoelectric system. Further details are given in the Cruise Report.

Three watchkeepers were involved in the drawing and fixing of approximately 1300 samples, and the comparison of duplicate pairs (Table 3) indicates that all three were achieving a high level of reproducibility on the sampling process. The agreement between duplicates also indicates that the analysis procedure was being performed with a good degree of consistency. The only query remaining at the end of the cruise was over the absolute standardisation of the dissolved oxygen concentrations. There is the possibility that although the collection and analysis of samples was performed with a high degree of consistency, there remains a bias in the absolute values. Figure 2 shows a comparison of oxygen sample data from Cruise 189 with data from nearby stations occupied during the TTO experiment (TTO, 1986). It appears that Cruise 189 data are a little higher than TTO data, by perhaps one or two percent. The handling of standard solutions used in the analysis procedure is presently under review at IOSDL, and it is hoped that this issue will be resolved in the near future.

Chlorophyll

Although some samples were drawn for chlorophyll analysis from a small number of stations, a fluorometer calibration was arrived at by comparing samples drawn from the ship's non-toxic supply in the Biology Laboratory with near-surface measurements made while the fluorometer was being towed in the SeaSoar. 113 near-surface samples were analysed, including 44 duplicate pairs. The mean difference between duplicates was 0.08 mg/m^3 and the rms difference was 0.11 mg/m^3 . 73% of duplicates differed by 0.1 mg/m^3 or less, and 91% differed by no more than 0.2 mg/m^3 . The CTD fluorometer calibration was calculated using 22 night-time samples, daytime samples being subsequently used to infer a correction to SeaSoar CTD data for suppression of fluorescence due to daylight. 200ml of water sample were filtered through a 2.5 cm diameter filter (Whatman GFF, nominal size $0.7 \mu\text{m}$), and the chlorophyll extracted into 10 ml of 90% Acetone. This was then analysed in a Turner 113 Fluorometer, which was standardised at the start and the end of the cruise. Since the later standardisation provided the more consistent linear calibration, this was used to calibrate all the sample values collected during the cruise. Sample values were then compared with CTD fluorescence values, to provide a calibration for the CTD fluorometer. The differences between CTD and sample values are summarised in Table 4.

Nutrients

Duplicate samples were drawn into plastic bottles, from all Niskin bottles, for nutrient analysis. Since there was no autoanalyser on board, the samples were frozen for

analysis at IOSDL after the cruise. It had been intended that that the samples should be analysed very soon after their return to IOSDL, on a new autoanalyser that had been purchased. Unfortunately, there were teething troubles with the new equipment, and the analyses were not carried out before the new equipment was itself taken to sea on Charles Darwin Cruise 50. A period of approximately six months eventually elapsed before the samples could be analysed, which brings into doubt the likely quality of the measurements. No nutrient data are therefore presented in this report. If subsequent analysis of the sample data suggests that they contain useful information, they may be published at a later date.

3. COLLECTION AND PROCESSING OF CTD DATA

Introduction

CTD data are passed from the Neill Brown CTD Deck Unit to a small dedicated microcomputer ('Level A') where one-second averages of all the raw values are assembled. This process includes checking for pressure jumps exceeding 100 raw units (10db for the pressure transducer on the CTD) and discarding of spikes detected by a median-sorting routine. A fuller account of this procedure is given by Pollard et al. (1987). The rate of change of temperature is also estimated. The one-second data are passed to a SUN workstation and archived. Calibration algorithms are then applied (as will be described) along with further editing procedures. Partially processed data are archived after various stages of processing. CTD salinity, dissolved oxygen concentrations and chlorophylls are reconciled with sample values, and any necessary adjustments made. CTD temperatures were compared with reversing thermometer measurements; there were no reversing pressure measurements made on the cruise. The downcast data are extracted, sorted on pressure and averaged to 2db intervals; any gaps in the averaged data are filled by linear interpolation. Derived oceanographic variables are computed, and data are extracted for gridding into sections or for producing the station listings included in this report.

Pressure

Pressure was calibrated using data from a laboratory calibration carried out on 06/02/90. The following quadratic correction was applied:

$$p = 5.159 \times 10^{-7} p_{in}^2 + 0.9958 p_{in} - 5.49$$

The coefficients for this calibration were computed using a standard value for the acceleration due to Earth's gravity, rather than the local value for IOSDL, so the pressure was then adjusted according to

$$P_{new} = P_{old} \times \frac{981.126}{980.665}$$

A further correction was made for the effect of temperature on the CTD pressure offset:

$$P_{\text{new}} = P_{\text{old}} - 0.039 (T_{\text{lag}} - 9) .$$

Here T_{lag} is a lagged temperature, in degrees C, constructed from the CTD temperatures by the program 'recal2'. The time constant for the lagged temperature was 400 seconds. The values of 400 seconds and the sensitivity of 0.39 db/°C are based on laboratory tests.

A final adjustment to pressure is to make a correction to upcast pressures for hysteresis in the sensor. This correction is made using 'recal2' (qv).

Temperature

The CTD temperature was calibrated in the laboratory at IOSDL on 06/02/90. The following calibration was used:

$$T = 0.9985949 T_{\text{in}} - 0.0118$$

This calibration was in °C in the ITS-90 scale, which is used for all temperature data given in this report. For the purpose of computing derived oceanographic variables, temperatures were converted to the 1968 scale, using

$$T_{68} = 1.00024 T_{90}$$

as suggested by Saunders (1990).

In order to allow for the mismatch between the time constants of the temperature and conductivity sensors, the temperatures were corrected according to the procedure described in the SCOR WG 51 report (Crease et al., 1988). The time constant used was 0.15 seconds.

Salinity

Salinity was calculated by converting temperatures measured in the ITS-90 scale to the IPTS-68 scale, and then using the usual algorithm for computing Salinity from pressure, temperature and conductivity. The known effect of temperature and pressure on the conductivity cell was allowed for according to SCOR WG 51, using the program 'recal2' (qv).

In order to achieve satisfactory reconciliation of CTD salinities with sample salinities, a number of further procedures were required, which are not normally adopted at IOSDL.

Firstly, it was found that there was a hysteresis between θ -S relations on the downcast and upcast of a station. Within a few hundred metres of the upcast commencing, the CTD

salinity was found to be lower than the downcast by typically 0.004 and at worst 0.01 (at a given potential temperature). This effect could not be removed by adjusting the temperature time constant. Note in passing that this would be equivalent to the pressure sensor reading 10 db too high on the upcast. It was clear that comparing bottle sample values with upcast CTD salinities corresponding to Niskin Bottle closures would not provide an adequate calibration of downcast CTD salinities. It was therefore decided that downcast CTD salinities would be extracted at potential temperatures that matched the upcast potential temperature at which a Niskin bottle was fired. This procedure is analogous to the one used for calibration of downcast CTD oxygens.

For most bottle samples, there was no difficulty in extracting downcast CTD data cycles that matched upcast CTD values exactly in potential temperature, and closely in pressure. This downcast CTD salinity was required to be a good fit to the sample salinity. Difficulty was experienced, however, with Niskin bottles closed in the oxygen minimum corresponding to the Mediterranean water. For many stations, the water at this depth had several inversions in potential temperature, and it was sometimes not possible to identify a unique data cycle in the downcast that could be compared with the bottle salinity. Such points were not used in the salinity calibration.

After extracting CTD downcast data cycles that were considered to be 'good' for the purposes of salinity calibration, an attempt was made to reconcile the CTD data with the sample data. As successive stations were examined, it became apparent that stations could not be fitted by choosing a single value for the cell conductivity ratio, or, equivalently, by applying a single salinity offset. Examination of groups of stations revealed that residuals between CTD and bottle salinities could be fitted by a linear combination of temperature and pressure. The required corrections, although similar in effect to the corrections made in 'recal2' (described in step (8) of that program), were of much larger magnitude. For each station, the salinity was offset by an amount

$$S_{\text{new}} = S_{\text{old}} + 0.001 (a + b p + c T)$$

Initially, coefficients a , b , and c were computed for each station, there being between 10 and 12 sample-CTD pairs for the fit. It was then found that values of b and c could be chosen for groups of stations (with the group of deepest stations requiring slightly different coefficients), but that the offset, a , needed to be determined station by station. After b and c had been chosen, the offset was determined by performing a best fit between the CTD and sample values for samples collected at depths deeper than 2500m. The resulting coefficients are given in Table 5. The remaining sample-CTD differences are summarized in Table 6.

We note in passing that the difficulties experienced in calibrating the CTD salinity may have arisen from a failing conductivity cell. The cell failed totally on the first station of the next cruise on which the CTD was deployed. Having noted this, however, we believe that the CTD salinity values eventually accepted on the cruise and reported here, are of a satisfactory standard. Figures 3a and 3b show the deep θ -S relation for the sample and CTD data respectively. A linear least squares regression of S on θ for 153 samples below 2.5°C gives

$$S = 34.6979 + 0.0978 \theta .$$

In the range $2^\circ\text{C} < \theta < 3^\circ\text{C}$, this differs by less than 0.001 from Saunders (1986), who gives

$$S = 34.698 + 0.098 \theta .$$

Oxygen

CTD dissolved oxygen concentrations were computed from measured CTD variables according to the formula

$$\text{Oxygen} = \text{Oxsat}(T,S) \times \rho \times \text{Oxyc} \times \exp(\alpha \text{Oxtemp} + \beta p)$$

where ρ , α and β are to be determined from the sample data, and Oxtemp is a combination of temperature from the Oxyt sensor and unlagged CTD temperature, thus

$$\text{Oxtemp} = 0.6 \text{Oxyc} + 0.4 T_{\text{CTD}}$$

In order to calculate the unknown fitting parameters, a linear least squares regression is performed of $\ln\left(\frac{\text{sample oxygen}}{\text{Oxsat.Oxyc}}\right)$ on Oxtemp and pressure, with α , β and $\ln(\rho)$ as the unknown coefficients. Since between 10 and 12 sample oxygen determinations were available for nearly every station, it was decided to fit the CTD values to sample values for each station. The resulting coefficients are shown in Table 7.

For a variety of reasons, the most significant of which is that upcast Oxyc values are unusable because the CTD power supply is interrupted each time a Niskin bottle is fired, it is necessary to use downcast CTD oxygen parameters when calibrating the CTD oxygens. These were extracted from data cycles that had potential temperatures which matched the upcast potential temperature at the time that the sample was collected. There was in general no difficulty in matching potential temperatures, except where there was influence of Mediterranean water, resulting in potential temperature inversions. This meant that a fully automatic procedure could not be used to extract suitable downcast data, and subjective decisions were sometimes made about which data cycle to choose. Downcast values of

pressure, temperature, salinity, O₂ and O₂ were thus extracted and used in the oxygen fitting process.

The goodness of fit of oxygen CTD data to sample data may be judged from Tables 7 and 8. In addition to the coefficients used to calibrate the CTD data, Table 7 gives the standard deviation of the (sample-CTD) difference for each station. Furthermore, the sample data are overplotted on the CTD profile plots given at the end of the report. In general, the best fit is achieved to the deeper bottles (usually no worse than 0.03 ml/l) and the worst fit is achieved in the oxygen minimum.

Conversion from ml/l to $\mu\text{mol/kg}$

Dissolved oxygen data listed in this report are given in units of ml/l, as computed by the analysts on board the cruise. In order to convert this quantity to $\mu\text{mol/kg}$, Saunders (1986) multiplies by 43.57, which involves a factor of 44.660 to convert ml to μmol and 1.025 for the density of seawater. In fact, the appropriate density of seawater is the density at the time that the oxygen content of the samples is 'fixed' in the reagent bottles, when the sample is drawn. For conversion of values collected in deep bottles, collected at temperatures of approximately 2.5°C with samples drawn at about the same temperature, a density of 1.028 kg/l should be used. Thus dissolved oxygen concentrations at deep levels reported here should be converted from ml/l to $\mu\text{mol/kg}$ by multiplying by a factor of 43.45. This factor is 0.3% smaller than the one used by Saunders.

Chlorophyll

Fluorescence was measured using Aquatracker fluorometers, numbers SA240 and SA228, with 6000m pressure cases (supplied by RVS). SA240 was used for all stations except 12000 to 12002. SA228 was used for stations 12001 and 12002, because SA240 had been installed in the SeaSoar. At the start of the cruise, to provide working data, a calibration was used that had been derived on a previous cruise. After the end of the cruise, all chlorophyll sample data were inspected and a new calibration deduced. This single calibration was then applied to the entire cruise dataset and was as follows:

$$\text{Chlorophyll} = \exp(3.67 \text{ Fluor} - 3.16)$$

where Fluor is the raw fluorometer value and chlorophyll is calibrated in mg/m^3 . With the small number of chlorophyll samples available to calibrate SA228, it was not possible to deduce a calibration significantly different from the one deduced for SA240.

Note that in the data reported here, no attempt has been made to account for the reduction in near-surface measured fluorescence during daylight hours.

The goodness of fit between sample and CTD data is summarized in Table 4. For the 22 points used in the calibration, the regression of $\ln(\text{Chla})$ on Fluor has a correlation coefficient of 0.97.

Transmittance

Transmittance was measured using a one-metre path Sea-Tech transmissometer, number SN35, which has a peak of emission at a wavelength of 660 nm. At the start of the cruise, after careful cleaning of the optical surfaces, an air calibration value of 4.33 volts was achieved, with a reading of 0.017 volts when the path was blocked. Subsequent air calibration values achieved were 4.32 (prior to station 11975), 4.33(11977), 4.24(11996), 4.31(12001), 4.28(12015), 4.31(12020).

The manufacturer's laboratory calibration for the instrument indicated that a water calibration factor of 1.0032 was required when the air calibration was 4.355 volts. Thus the initial calibration used, to give transmittance in percent, was

$$\text{Trans} = \frac{4.355}{4.33} 1.0032 (0.001 \text{ Transraw} - 0.017) \times 20$$

where 0.001 is the scaling factor to convert CTD deck unit values into volts. Full scale is 5 volts, corresponding to 100 percent. The above calibration is equivalent to

$$\text{Trans} = 1.00899 (0.02 \text{ Transraw}) - 0.343.$$

Subsequent processing of the data corrected for variation of the refractive index of seawater, and the compressibility of seawater, to produce potential transmittance. The corrections applied were derived by P. M. Saunders (private communication) from formulae supplied by the manufacturer. Thus

$$\text{Trans}_{\text{new}} = \frac{\text{Trans}_{\text{old}}}{[1.001055 + 2.12 \times 10^{-7} p - 1.1 \times 10^{-5} (T-9) + 2.9 \times 10^{-5} (S-35)]}$$

and,

$$\text{Potrans} = \text{Trans} \left(1 - \frac{p}{2.158 \times 10^5} \ln \frac{\text{Trans}}{100} \right)$$

At 5000 db, these two corrections contribute approximately -0.2 percent and +0.8 percent respectively. Finally, attenuation is computed as

$$\text{Atten} = - \ln \left(\frac{\text{Potrans}}{100} \right)$$

Hysteresis Some stations exhibited hysteresis between upcast and downcast transmittances, with upcast values being slightly higher (ie lower attenuation). Downcast

transmittances are published in this report. The hysteresis was 0.5 percent at worst, over the range 1000 to 3000 db, but more usually about 0.2 percent. This is slightly more hysteresis than reported by Bishop (1986), who suggests that such up/down offsets may be related to temperature effects. It does not appear, however, that temperature is the controlling factor in our data. The hysteresis was most noticeable in stations deeper than 2500db, when the instrument spends most of the time in water whose temperature varies by no more than about 1°C, and was very much reduced, indeed hardly noticeable, on stations for which the maximum pressure was less than 2500 db. Brief inspection of (unpublished) CTD data collected on Charles Darwin Cruise 42 reveals a similar pattern, namely, significant hysteresis on deep stations, with less on stations to less than 2500db.

Fine tuning of offset It is commonly the case with transmittance data that maximum values at mid-depth (say 3000 db) suffer offsets between adjacent stations because of variations in the extent to which the optical surfaces were cleaned before deployment, and the possible contamination of the optical surfaces as the instrument passes through the surface layer. An initial attempt to plot sections of transmittance data, after calibration according to the above procedure, revealed a signal significantly degraded by the offsets described above.

A typical station consists of transmittances in the range 40 to 65 percent in the surface layer, where the attenuation is well correlated with fluorescence (Figure 4). Below the surface layer, the transmittance increases to something near the clear water value, and any attenuation in this region is principally due to detritus. As depth increases, the potential transmittance generally increases slowly towards a maximum value found about 500m above the seabed. The transmittance falls off as the seabed is approached, which is attributed to resuspension of sediment. This pattern may be seen in most of the profile plots, and can be clearly seen in the section plots. However, local maxima and minima can arise from the slightly different scattering associated with different water masses. For example, the 20°W section shows a slight transmittance minimum at about 1500m associated with Labrador Sea Water (relatively murky) underlying Mediterranean Water (relatively clear). Figure 5 shows the individual potential transmittance profiles (suitably offset) for the 20°W section.

In order to construct useful vertical sections, it was necessary to remove the station to station offsets discussed earlier. Assuming that such offsets arise from dirty optical surfaces, which biases the transmittance to a lower value, it was decided to correct station values upwards by comparison with a chosen station (11973) which showed a relatively high value of maximum transmittance. The procedure for correction was as follows.

For each station, a table was produced, at 50db intervals, of the quantity

$$\frac{\text{transmittance at station N}}{\text{transmittance at station 11973}}$$

Based on these listings, a section of the profile was chosen over which this ratio was reasonably uniform. For example, on station 11970 between 2500m and 4500m the ratio varied between 0.9983 to 0.9994 with a mean of 0.9988 and a standard deviation of 0.0002. The reciprocal of this factor was then used to correct the potential transmittance data for the entire station. For some stations, particularly some shallower stations and stations in the Bay of Biscay (12001 and later), it was not possible to deduce a correction factor by comparison with station 11973. In such cases, correction factors were taken from other nearby stations. A list of correction factors used is given in Table 9.

The resulting section plots show that while some stations still suffer offsets, the intercalibration between stations is generally satisfactory.

Processing path for CTD data

This section is a fairly detailed summary of the processing path for CTD data presented in this report.

1) Read raw data from RVS data file using program 'datapup'.

2) Run 'pcopya' and 'pheadr' to establish upper and lower limits of variables and fix up PSTAR data header, including dataname, ship and instrument details, station position, water depth.

3) Run 'ctdcal' to apply preliminary calibrations to certain variables, as follows.

$$P = (0.1 * P_{raw})$$

$$T = 0.9985949 * (0.005 * T_{raw}) - 0.0118$$

$$C = 0.9937 * (0.001 * C_{raw})$$

$$\text{Fluor} = \exp (4.14 * (0.001 * F_{raw}) - 3.7)$$

$$\text{Trans} = 1.00899 * (0.02 * T_{raw}) - 0.343$$

$$\text{Oxyt} = (0.128 * O_{ytraw})$$

$$\text{Oxyc} = 1.494 * (0.001 * O_{ycraw})$$

$$\text{Oxygen} = \text{Oxsat}(T,S) * \text{Oxyc} * \exp (-0.046 * \text{Oxyt} + 0.000157 * p)$$

'ctdcal' also computes salinity.

In fact, subsequent adjustments were made to the calibration of all the variables except temperature. These adjustments are described in full in the sections relating to particular sensors.

4) Run 'recal2'. This program applies a number of calibration corrections, to pressure, temperature, conductivity and salinity, as described in the next section.

5) Run 'ptran2' to compute potential transmittance. Note that in its present form, this program applies a correction for air calibration value, which is set up within the programme code.

6) Run 'peos83' to compute potential temperature, salinity and potential density.

7) Run 'getcal' to extract upcast potemps corresponding to firing of Niskin bottles and to establish conditions of firing.

8) Run 'plistd' to identify the portion of the data file corresponding to the down cast. Run 'pcopya' to copy the downcast portion to a new file.

9) From a listing of the downcast file, extract the oxygen and salinity parameters at downcast potemps that match the upcast potemps of Niskin bottle firings. Data are unlikely to be useful for calibration if upcast and downcast pressures differ substantially.

10) Run 'oxyca2' to obtain oxygen fitting parameters from downcast CTD values and sample oxygen values.

11) Run 'oxygn2' to compute new CTD oxygens using the new fitting parameters.

12) Apply any necessary salinity correction, after reconciling CTD values with sample values.

13) Run 'peos83' to compute potemp after salinity correction.

14) Run 'pmdian' and 'pintrp' to remove salinity spikes.

15) Run 'psort' on pressure, followed by 'pavrge' to reduce data to values at 2db intervals.

16) Run 'pintrp' on all variables to fill any empty bins left by pavrge.

17) Run 'peos83' to compute sound velocity, and other derived variables.

18) Make adjustments to transmittance (post cruise processing).

19) Make adjustments to chlorophyll (post cruise processing).

20) Run 'pgridp' to construct gridded files of CTD sections.

CTD data processing in program 'recal2'

The purpose of the program 'recal2' is to apply corrections to approximately calibrated CTD data. The input data are pressure, temperature, salinity and a time variable. The program performs the following operations.

- 1) Compute conductivity from pressure, temperature, salinity.
- 2) Apply linear calibration to temperature if required. On Cruise 189, $T_{\text{new}} = T_{\text{old}}$.
- 3) Calculate lagged temperature for use in correction of pressure sensor. This is done as follows.

First, compute the average of the first 20 temperatures, as an initial lagged temperature. Next, for each data cycle, update the lagged temperature using

$$T_{\text{lag}_i} = W * T_{\text{lag}_{i-1}} + (1-W) * T_{\text{good}}$$

Here, T_{good} is the most recent good temperature, usually the CTD temperature for data cycle i , and

$$W = \exp\left(-\frac{t_{\text{int}}}{t_{\text{const}}} * \Delta t\right)$$

where t_{int} is specified at the start of the program and is the number of seconds per unit of the time variable (usually equal to unity since time is usually measured in seconds for CTD data), t_{const} is the time constant in seconds for the rate of change of the lagged temperature, and Δt is the time interval over which the lagged temperature is to be updated (usually one second for CTD data, but more when there are gaps in the time base). For Cruise 189, $t_{\text{int}} = 1$, $t_{\text{const}} = 400$.

- 4) Apply quadratic correction to pressure based on laboratory calibration.

$$P_{\text{new}} = A * P_{\text{old}}^2 + B * P_{\text{old}} + C$$

On Cruise 189, $A = 5.159 * 10^{-7}$, $B = 0.9958$, $C = -5.49$.

- 5) Apply correction to account for difference between acceleration due to Earth's gravity at Wormley and the standard value used in laboratory calibration.

$$P_{\text{new}} = P_{\text{old}} * \frac{981.126}{980.665}$$

Note that in future this may already have been accounted for in the pressure calibration (4), in which case this adjustment should be removed from the program.

6) Apply correction to pressure for the effect of temperature on deck offset. Use lagged temperature calculated in section (3) above.

$$P_{\text{new}} = P_{\text{old}} - \text{ptslope} * (T_{\text{lag}} - T_{\text{zero}})$$

Here, ptslope is the rate of change of deck offset with temperature. Tzero is the temperature at which the calibration applied in (4) gives the correct deck offset. For Cruise 189, ptslope = 0.39 db/°C, Tzero = 9 °C.

7) Apply a correction to the upcast pressures for hysteresis arising from the loading and unloading of the sensor. This is calculated on the basis of laboratory measurements of the hysteresis.

The amount of hysteresis after a cast to 5500m (denoted by $\Delta p_{5500}(p)$) is given in Table 10 for pressures at 500db intervals. Intermediate values are found by linear interpolation. If the observed pressure lies outside the range defined by the table, $\Delta p_{5500}(p)$ is set to zero.

For a cast in which the maximum pressure reached is pmax decibars, the correction applied to the upcast CTD pressure is

$$P_{\text{new}} = P_{\text{old}} - \left(\Delta p_{5500}(P_{\text{old}}) - \left(\frac{P_{\text{old}}}{p_{\text{max}}} * \Delta p_{5500}(p_{\text{max}}) \right) \right)$$

8) Correct the conductivity using a cell ratio. Also, apply a correction for the effect of pressure and temperature on the cell ratio.

$$C_{\text{new}} = C_{\text{old}} * \text{cfac} * (1 + (\text{cpslope} * p) + \text{ctslope} * (T - T_{\text{org}}))$$

where p and T are instantaneous pressure and temperature, cpslope is the rate of change of cell ratio with pressure, ctslope is the rate of change of cell ratio with temperature, and cfac is the cell ratio at pressure zero and temperature Torg. Crease et al. (1988) give cpslope = 1.5E-8, ctslope = -6.5E-6. For Cruise 189, Torg was taken to be 15 °C.

9) Finally, salinity is calculated from corrected temperature, pressure and conductivity.

4. LISTINGS AND PLOTS OF CTD AND SAMPLE DATA

Listings and profile plots

CTD listings

Downcast CTD data were processed into 2db averages, as described elsewhere. Data were extracted at chosen pressures from the 2db files for all variables except Brunt-Vaisala frequency. This quantity was then computed using the data (at varying pressure intervals) extracted for the listings.

Data listed as 'fluor' are CTD fluorescence data converted to chlorophyll content in mg/m^3 by reconciliation with sample data.

Sigma0, sigma2, sigma4 are potential density referenced to 0, 2000, 4000 db respectively.

Sample data

Niskin bottle sample values are listed for salinity and dissolved oxygen concentration. Most Niskin bottles had duplicate samples drawn for analysis, as described elsewhere in the text. Usually, duplicates were in such good agreement that taking the average of the two values (if they differed) was sufficient to provide a good estimate of the sample salinity or oxygen. If duplicate values differed significantly, one or other was rejected on the basis of comparison with CTD data or with data from nearby stations. In order to provide extra duplication to enable checks to be made of various new equipment, it was usual to close two Niskin bottles at the bottom of each cast. Only one sample value is reported here, arising from (usually) four analysed samples.

The temperature, potemp and pressure data are taken from the CTD. The procedure by which downcast CTD salinity and oxygen data were extracted for reconciliation with sample values is described elsewhere; the pressure and temperature listed here are from the downcast CTD data cycle used in the reconciliation.

Profile plots

Two profile plots are included for each station. The first covers the range 0-300 db, and has profiles of potential temperature, potential transmittance, salinity and chlorophyll (labelled as fluor). The second plot is over 0-6000 db and contains potential temperature, potential transmittance, salinity and dissolved oxygen; oxygen sample values are overplotted with symbols..

Section plots

CTD station data have been subsampled at 50 db intervals, for plotting as vertical sections. Data have been extracted from the 2 db averaged profiles, with the shallowest level at 25 db. Six sections have been defined from station numbers, as follows:

42N	11962-11977
20W	11977-11994
53N	11994-12000
08W	12007, 12006, 12005, 12004, 12003, 12001, 12002
09W	12007, 12008, 12010, 12012, 12014, 12016, 12018
10W	12009, 12011, 12013, 12015, 12017, 12019, 12020

For each section, plots of the following variables are included, with the indicated contour intervals:

potemp	CI = 0.5
salin	CI = 0.1, extra dashed contour 34.95
sigma0	solid CI = 0.05, dashed contours 0.025
oxygen	CI = 0.2
potran	CI = 0.1, minimum contour 68.0

The variable contoured in each plot is identified as the 'Z var' below and towards the right of each plot. In narrow plots, the text 'Z var' has been omitted. The section number is given above each plot.

Additionally, plots of sigma2 are included for the 42°N and 20°W sections. The CI is 0.1 for solid contours, with dotted contours at 0.05. Also, a plot of geostrophic velocity relative to 3000 db is included for the 20°W section; darker shading denotes eastward flow.

The bottom depths have been marked on each plot, using corrected water depths at CTD stations.

5. ACKNOWLEDGEMENTS

Parts of RRS Discovery Cruise 189 were hampered by poor weather. The authors are indebted to the dedication and skill of the Master and Officers, which enabled station work to continue safely in difficult conditions. Without their willing cooperation, several days of scientific time would have been lost and the present dataset would have been incomplete. J. Smithers provided calibration data for the CTD; M. Stirling provided assistance and advice in advance of the cruise, concerning chlorophyll measurements.

The principal author is supported by a Fellowship in the Joint Environmental Programme funded by National Power and PowerGen.

6. REFERENCES

- BISHOP, J.K.B. 1986 The correction and suspended particulate matter calibration of Sea Tech transmissometer data.
Deep Sea Research, 33A, 121-134.
- CREASE, J. et al. 1988 The acquisition, calibration and analysis of CTD data.
Unesco Technical Papers in Marine Science, No 54, 96pp.
- KING, B. A. et al. 1991 RRS Discovery Cruise 189, 9 March - 8 April 1990. Circulation and structure of the Bay of Biscay and north east Atlantic out to 20°W and 41°N.
Institute of Oceanographic Sciences Deacon Laboratory, Cruise Report, No. 225, 45pp.
- POLLARD, R. T. et al. 1989 RRS Discovery Cruise 181, 1 April - 3 May 1989. Circulation and structure of the Bay of Biscay and north east Atlantic out to 20°W and 41°N.
Institute of Oceanographic Sciences Deacon Laboratory, Cruise Report, No. 210, 51pp.
- POLLARD, R. T. , READ, J. F. & SMITHERS, J. 1987 CTD sections across the southwest Indian Ocean and Antarctic Circumpolar Current in southern summer 1986/87.
Institute of Oceanographic Sciences Deacon Laboratory, Report, No. 243, 161pp.
- SAUNDERS, P. M. 1986 The accuracy of measurement of salinity, oxygen and temperature in the deep ocean.
Journal of Physical Oceanography, 16, 189-195.
- SAUNDERS, P. M. 1990 The International Temperature Scale 1990, ITS-90.
WOCE Newsletter No 10, p. 10. (Unpublished manuscript).
- TTO, 1986 Transient Tracers in the Ocean, North Atlantic Study, 1 April - 19 October 1981,
Shipboard Physical and Chemical Data Report.
Scripps Institution of Oceanography, Reference No. 86-15, 714pp.

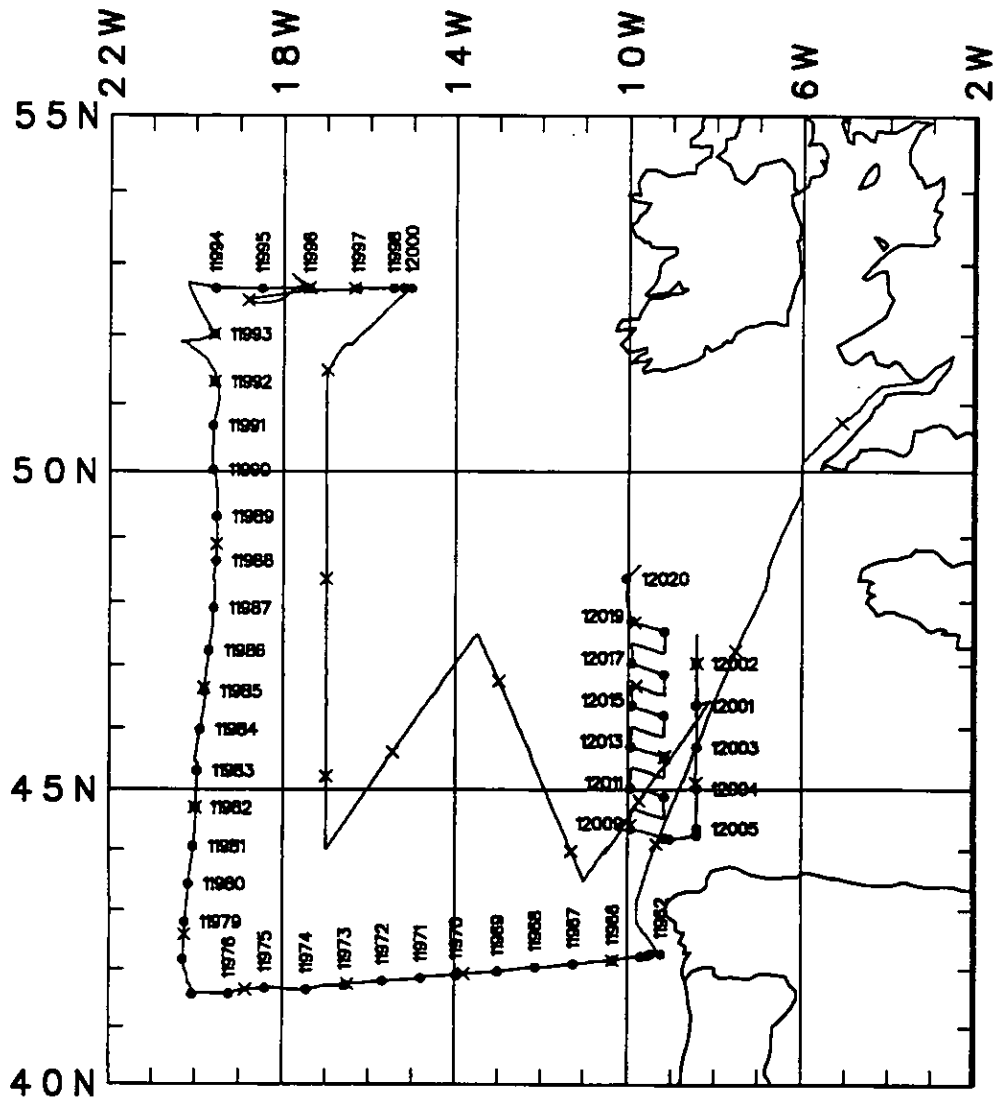


Figure 1 Cruise track for RRS Discovery Cruise 189, 09 Mar-08 Apr 1990. CTD station positions are indicated.

RRS Discovery Cruise 189 CTD station list

Station number	March day	Year day	start time	down time	end time	max press (db)	corrected depth (m)	latitude degrees (N) minutes	longitude degrees (W) minutes
11962	12	71	1022	1026	1047	0161	0177	42 15.75	09 13.63
11963	12	71	1215	1231	1259	0659	0659	42 15.87	09 28.12
11964	12	71	1434	1455	1535	1281	1293	42 14.27	09 32.36
11965	12	71	1703	1739	1830	2139	2144	42 13.10	09 41.00
11966	12	71	2159	2245	2354	2783	2773	42 09.14	10 19.80
11967	13	72	0422	0459	0550	2443	2454	42 05.70	11 13.40
11968	13	72	1043	1141	1302	4057	4100	42 02.24	12 07.70
11969	13	72	1711	1841	2022	5395	5339	41 57.80	12 59.60
11970	14	73	0112	0234	0414	5327	5340	41 54.10	13 57.50
11971	14	73	0824	0938	1137	5265	5336	41 51.00	14 47.00
11972	14	73	1725	1847	2030	5275	5231	41 47.82	15 40.47
11973	15	74	0044	0213	0353	5131	5154	41 43.24	16 33.42
11974	15	74	0821	0956	1155	5515	5573	41 38.97	17 26.51
11975	15	74	1824	1937	2125	5075	5148	41 40.49	18 23.60
11976	16	75	0232	0356	0532	4515	4531	41 34.56	19 13.38
11977	16	75	1019	1052	1150	2137	2200	41 34.04	20 03.82
11978	16	75	1853	1952	2113	4133	4126	42 10.10	20 17.43
11979	17	76	0152	0325	0515	5309	5339	42 47.83	20 14.37
11980	17	76	0957	1053	1204	3959	3989	43 26.52	20 09.26
11981	17	76	1619	1713	1823	3865	3856	44 03.84	20 02.58
11982	17	76	2252	2351	0110	4079	4086	44 42.72	20 00.23
11983	18	77	0511	0620	0744	4461	4459	45 18.96	19 57.52
11984	18	77	1411	1515	1640	4367	4380	45 58.98	19 53.42
11985	18	77	2034	2147	2347	4853	4804	46 35.88	19 47.40
11986	19	78	0337	0448	0615	4567	4556	47 14.50	19 41.95
11987	19	78	1039	1151	1320	4519	4566	47 54.76	19 34.85
11988	19	78	2000	2100	2219	4011	4034	48 38.67	19 31.78
11989	20	79	0247	0354	0501	3849	3846	49 19.46	19 31.39
11990	20	79	1004	1106	1230	3989	4005	50 01.81	19 35.92
11991	20	79	1630	1725	1833	3781	3775	50 41.23	19 36.45
11992	21	80	0000	0104	0216	3711	3683	51 20.01	19 33.71
11993	21	80	2223	2328	0050	3821	3807	52 00.91	19 34.32
11994	22	81	1116	1201	1305	2643	2675	52 40.18	19 33.10
11995	22	81	1709	1812	1936	3987	4022	52 39.75	18 29.22
11996	24	83	1728	1830	1953	3745	3744	52 39.96	17 24.23
11997	25	84	0033	0130	0236	3443	3461	52 39.76	16 17.50
11998	25	84	0615	0703	0753	2879	3017	52 39.90	15 27.58
11999	25	84	0918	0946	1015	1567	1570	52 39.91	15 13.17
12000	25	84	1144	1200	1222	0993	1109	52 39.72	15 02.24
12001	32	91	1652	1804	1937	4851	4788	46 22.11	08 25.65
12002	33	92	2342	0050	0202	4197	4164	47 02.36	08 25.53
12003	33	92	1745	1859	2040	4929	4868	45 41.52	08 24.92
12004	34	93	0040	0159	0320	4969	4901	45 01.41	08 24.75
12005	34	93	0724	0829	0942	4495	4475	44 22.08	08 24.56
12006	34	93	1039	1106	1145	1791	2003	44 14.96	08 25.06
12007	34	93	1432	1454	1520	1205	1243	44 11.28	09 02.60
12008	34	93	1614	1649	1723	2307	2314	44 12.41	09 10.31
12009	34	93	2051	2204	2338	5003	4954	44 21.62	09 55.45
12010	35	94	0643	0743	0910	4989	4916	44 53.42	09 09.84
12011	35	94	1228	1355	1525	4987	4922	45 01.95	09 55.94
12012	35	94	2240	2355	0121	4911	4891	45 32.45	09 09.29
12013	36	95	0449	0548	0654	4803	4834	45 42.34	09 55.82
12014	36	95	1350	1504	1618	4889	4824	46 12.35	09 10.43
12015	36	95	1952	2047	2155	4805	4743	46 22.07	09 54.38
12016	37	96	0424	0512	0608	4209	4196	46 51.66	09 10.68
12017	37	96	1020	1124	1238	4539	4497	47 02.25	09 54.76
12018	37	96	1958	2036	2120	2883	2875	47 32.32	09 10.14
12019	38	97	0030	0137	0238	4075	4009	47 42.39	09 55.48
12020	38	97	0716	0800	0851	2991	3188	48 22.26	10 02.61

Day numbers of stations are the day numbers corresponding to the time at which the CTD was at the bottom of the cast. Positions are given in degrees, minutes and decimal minutes.

Table 1 Distribution of differences between duplicate sample salinities.

Salinity difference	0.000	0.001	0.002	0.003	>0.003	total
Number	150	224	101	63	79	617

Table 2 Differences between CTD (C) and SIS Digital Reversing Thermometers.
Thermometer numbers omit letter T.

Pair	mean mdegC	std.dev. mdegC	n	n within 2 mdegC of mean
C-204 (<3) ¹	-1	3	36	
C-238 (<3)	-4	2	36	
204-238 (<3)	-3	1	40	
C-204 (>3)	-3	6	7	
C-238 (>3)	-4	4	6	
204-238 (>3)	-2	5	8	
C-204 (all)	-1	3	43	34
C-238 (all)	-4	3	42	35
204-238 (all)	-3	2	48	44
C-207 (early) ²	-5	1	13	
C-183 (early)	-4	2	13	
C-179 (early)	-4	2	14	
207-183 (early)	1	2	21	
207-179 (early)	1	3	21	
183-179 (early)	0	4	21	
C-207 (late)	-5	5	17	
C-183 (late)	-4	4	22	
C-179 (late)	0	6	23	
207-183 (late)	1	1	18	
207-179 (late)	5	5	19	
183-179 (late)	5	3	24	
C-207 (all)	-5	4	30	22
C-183 (all)	-4	4	35	26
C-179 (all)	-2	5	37	bimodal ³
207-183 (all)	1	2	39	35
207-179 (all)	3	4	40	bimodal
183-179 (all)	3	4	45	bimodal
C-215 (<3)	-3 ⁴	3	10	
C-156 (<3)	-4	1	9	
215-156 (<3)	-3	3	17	
C-215 (>3)	-2	5	33	
C-156 (>3)	-4	6	31	
215-156 (>3)	-2	2	33	
C-215 (all)	-2	5	43	26
C-156 (all)	-4	5	40	25
215-156 (all)	-2	3	50	38

Note 1 : Temperature values less than 3°C, see p. 11.

2 : Early and late refer to before and after CTD frame accident, see p. 11.

3 : Due to the calibration offset on T179, the distribution of differences is bimodal.

The number of differences within 2 mdegC of the mean is therefore a poor indicator of performance.

4 : The modal value is -1.

Table 3 Distribution of differences between duplicate sample oxygens.

Oxygen difference $\times 10^{-3}$ ml/l	0-5	6-10	11-20	>20	station numbers
Number in range	68	41	27	21	11966-11982
	99	33	32	11	11983-12000
	128	28	9	6	12001-12017

Note that for the last group of stations, 75% of duplicate pairs agree to within 0.005 ml/l, and 91% to within 0.01 ml/l.

Table 4 Distribution of differences between CTD and sample chlorophylls.

Chlorophyll difference mg/m^3	0.0-0.10	0.10-0.25	>0.25	Total number	mean mg/m^3	std.dev. mg/m^3
Number in range	12	7	3	22	-0.01	0.17

Table 5 Coefficients used in CTD salinity correction.

Station number	a	b	c
11962	-037	0.00454	3.303
11963	-034	0.00454	3.303
11964	-034	0.00454	3.303
11965	-028	0.00454	3.303
11966	-040	0.00454	3.303
11967	-036	0.00454	3.303
11968	-039	0.00454	3.303
11969	-042	0.00624	3.462
11970	-043	0.00624	3.462
11971	-035	0.00624	3.462
11972	-034	0.00624	3.462
11973	-034	0.00624	3.462
11974	-034	0.00624	3.462
11975	-031	0.00454	3.303
11976	-030	0.00454	3.303
11977	-032	0.00454	3.303
11978	-041	0.00454	3.303
11979	-049	0.00624	3.462
11980	-041	0.00454	3.303
11981	-042	0.00454	3.303
11982	-041	0.00454	3.303
11983	-041	0.00454	3.303
11984	-042	0.00454	3.303
11985	-041	0.00454	3.303
11986	-040	0.00454	3.303
11987	-038	0.00454	3.303
11988	-042	0.00454	3.303
11989	-041	0.00454	3.303
11990	-044	0.00454	3.303
11991	-045	0.00454	3.303
11992	-044	0.00454	3.303
11993	-048	0.00454	3.303
11994	-082	0.00454	3.303
11995	-072	0.00454	3.303
11996	-108	0.00454	3.303
11997	-110	0.00454	3.303
11998	-111	0.00454	3.303
11999	-106	0.00454	3.303
12000	-106	0.00454	3.303
12001	-122	0.00537	3.605
12002	-116	0.00537	3.605
12003	-121	0.00537	3.605
12004	-113	0.00537	3.605
12005	-113	0.00537	3.605
12006	-109	0.00537	3.605
12007	-108	0.00537	3.605
12008	-107	0.00537	3.605
12009	-107	0.00537	3.605
12010	-106	0.00537	3.605
12011	-107	0.00537	3.605
12012	-106	0.00537	3.605
12013	-107	0.00537	3.605
12014	-105	0.00537	3.605
12015	-105	0.00537	3.605
12016	-108	0.00537	3.605
12017	-295	0.00537	3.605
12018	-336	0.00991	7.254
12019	-331	0.00991	7.254
12020	-333	0.00991	7.254

Table 6 Distribution of differences between CTD and sample salinities.

Salinity difference	0.000-0.002	0.002-0.004	>0.004	Total number	mean	std.dev.
All	356	133	123	612	0.000	0.004
>2000db	223	39	5	267	0.000	0.002

The table shows the distribution of differences less than 0.020. There were 24 comparisons where the salinity difference was more than 0.020, all shallower than 2000 db.

Table 7 Coefficients used in CTD oxygen calibration.

Station number	rho	α	β	std.dev. m/l	number in fit
11962	0.838	-0.0310	0.000159	-	0
11963	0.838	-0.0310	0.000159	0.07	6
11964	0.814	-0.0263	0.000190	0.07	6
11965	1.024	-0.0418	0.000163	0.07	9
11966	1.026	-0.0405	0.000169	0.05	12
11967	1.279	-0.0639	0.000071	0.10	12
11968	1.045	-0.0441	0.000159	0.04	11
11969	0.993	-0.0453	0.000157	0.04	12
11970	0.973	-0.0458	0.000162	0.06	12
11971	0.951	-0.0450	0.000159	0.05	12
11972	0.989	-0.0541	0.000156	0.06	12
11973	1.035	-0.0515	0.000157	0.03	12
11974	1.012	-0.0479	0.000158	0.04	12
11975	1.078	-0.0639	0.000151	0.05	7
11976	1.034	-0.0420	0.000165	0.05	12
11977	0.966	-0.0405	0.000184	0.02	10
11978	0.964	-0.0440	0.000164	0.06	12
11979	1.001	-0.0467	0.000159	0.12	12
11980	0.998	-0.0400	0.000172	0.03	12
11981	1.026	-0.0430	0.000171	0.04	12
11982	1.020	-0.0515	0.000154	0.03	10
11983	0.963	-0.0457	0.000161	0.06	11
11984	0.980	-0.0480	0.000149	0.05	12
11985	0.967	-0.0439	0.000163	0.09	12
11986	0.994	-0.0465	0.000158	0.07	12
11987	0.966	-0.0471	0.000160	0.08	12
11988	0.912	-0.0411	0.000161	0.11	12
11989	0.867	-0.0376	0.000182	0.12	9
11990	0.937	-0.0435	0.000166	0.07	12
11991	0.917	-0.0431	0.000163	0.10	12
11992	0.948	-0.0446	0.000159	0.09	9
11993	0.970	-0.0473	0.000150	0.04	9
11994	0.935	-0.0461	0.000159	0.07	12
11995	0.976	-0.0482	0.000147	0.10	7
11996	0.970	-0.0454	0.000143	0.06	11
11997	0.016	-0.0510	0.000138	0.03	12
11998	1.026	-0.0512	0.000136	0.08	12
11999	1.042	-0.0504	0.000125	0.04	6
12000	0.685	-0.0126	0.000173	0.07	6
12001	0.963	-0.0446	0.000148	0.08	12
12002	0.943	-0.0451	0.000149	0.06	8
12003	0.937	-0.0475	0.000149	0.07	11
12004	0.939	-0.0470	0.000150	0.04	7
12005	0.989	-0.0481	0.000152	0.07	12
12006	1.140	-0.0567	0.000120	0.05	11
12007	0.517	0.0020	0.000244	0.02	5
12008	1.050	-0.0521	0.000139	0.03	12
12009	1.005	-0.0490	0.000159	0.05	11
12010	0.943	-0.0468	0.000153	0.07	12
12011	0.940	-0.0449	0.000164	0.07	11
12012	0.932	-0.0474	0.000155	0.08	12
12013	0.947	-0.0461	0.000159	0.03	11
12014	0.901	-0.0446	0.000162	0.07	11
12015	0.939	-0.0454	0.000162	0.04	12
12016	0.963	-0.0504	0.000146	0.08	11
12017	0.976	-0.0452	0.000164	0.05	12
12018	1.048	-0.0561	0.000120	0.05	12
12019	0.931	-0.0466	0.000162	0.07	11
12020	1.010	-0.0502	0.000142	0.05	11

Table 8 Distribution of differences between CTD and sample oxygens.

Oxygen difference m/l	0.00-0.02	0.02-0.04	0.04-0.06	>0.06	Total number	mean	std.dev
All	223	156	69	158	606	0.004	0.06
>2000db	146	84	22	13	265	0.008	0.03

The table shows the distribution of differences less than 0.20 ml/l. There were 12 comparisons where the oxygen difference was more than 0.20 ml/l, all shallower than 2000 db.

Table 9 Correction factors applied to CTD transmittance data.

Station number	Transmittance correction factor
11962	1.0171
11963	1.0171
11964	1.0171
11965	1.0171
11966	1.0014
11967	1.0043
11968	1.0021
11969	1.0016
11970	1.0012
11971	1.0010
11972	1.0027
11973	1.0000
11974	1.0036
11975	1.0000
11976	1.0293
11977	1.0000
11978	1.0009
11979	0.9997
11980	1.0004
11981	1.0033
11982	1.0025
11983	1.0014
11984	1.0015
11985	1.0013
11986	1.0006
11987	1.0009
11988	1.0001
11989	0.9999
11990	1.0005
11991	1.0010
11992	1.0003
11993	1.0082
11994	1.0089
11995	1.0074
11996	1.0004
11997	1.0006
11998	1.0006
11999	1.0006
12000	1.0006
12001	1.0033
12002	1.0045
12003	1.0051
12004	1.0050
12005	1.0069
12006	1.0069
12007	1.0069
12008	1.0057
12009	1.0057
12010	1.0061
12011	1.0046
12012	1.0035
12013	1.0040
12014	1.0030
12015	1.0043
12016	1.0037
12017	1.0037
12018	1.0037
12019	1.0037
12020	1.0037

Table 10 Laboratory measurements of hysteresis in pressure sensor. $\Delta p_{5500}(p)$ = (upcast - downcast) pressure at various pressures, p , in a simulated 5500m cast.

p (db)	$\Delta p_{5500}(p)$ (db)
5500	0.0
5000	1.0
4500	1.2
4000	1.8
3500	2.4
3000	3.0
2500	3.4
2000	4.8
1500	5.6
1000	6.0
500	6.3
0	0.0

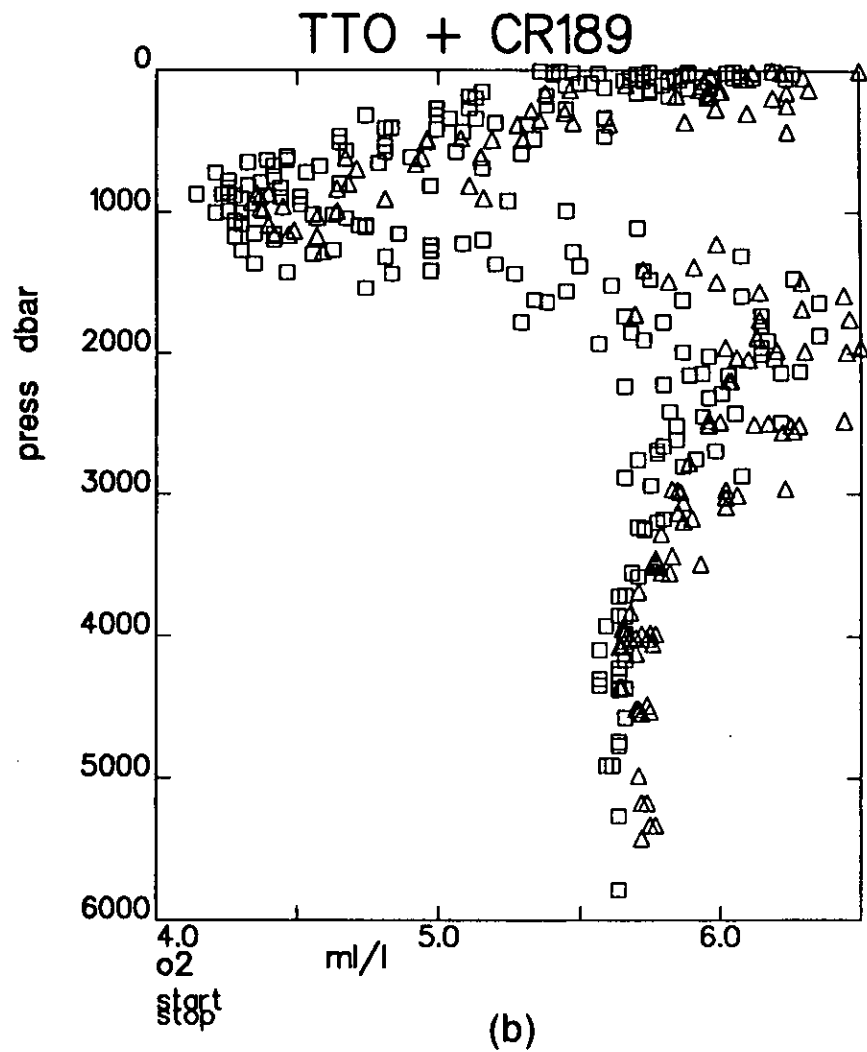
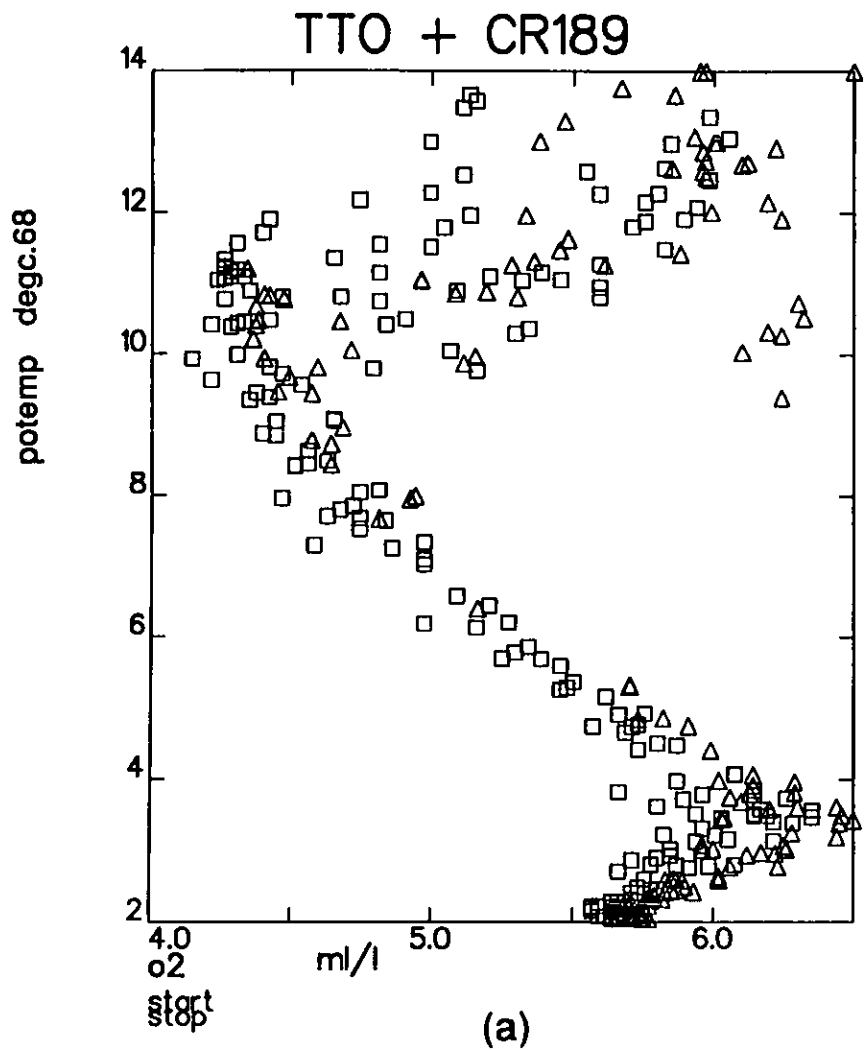


Figure 2 Theta-Oxygen (a) and Pressure-Oxygen (b) plots for Cruise 189 sample data (triangles) and TTO sample data (squares). TTO data are for stations 110-118 from leg 4, Cruise 189 data are stations 11962-11990, even numbered stations.

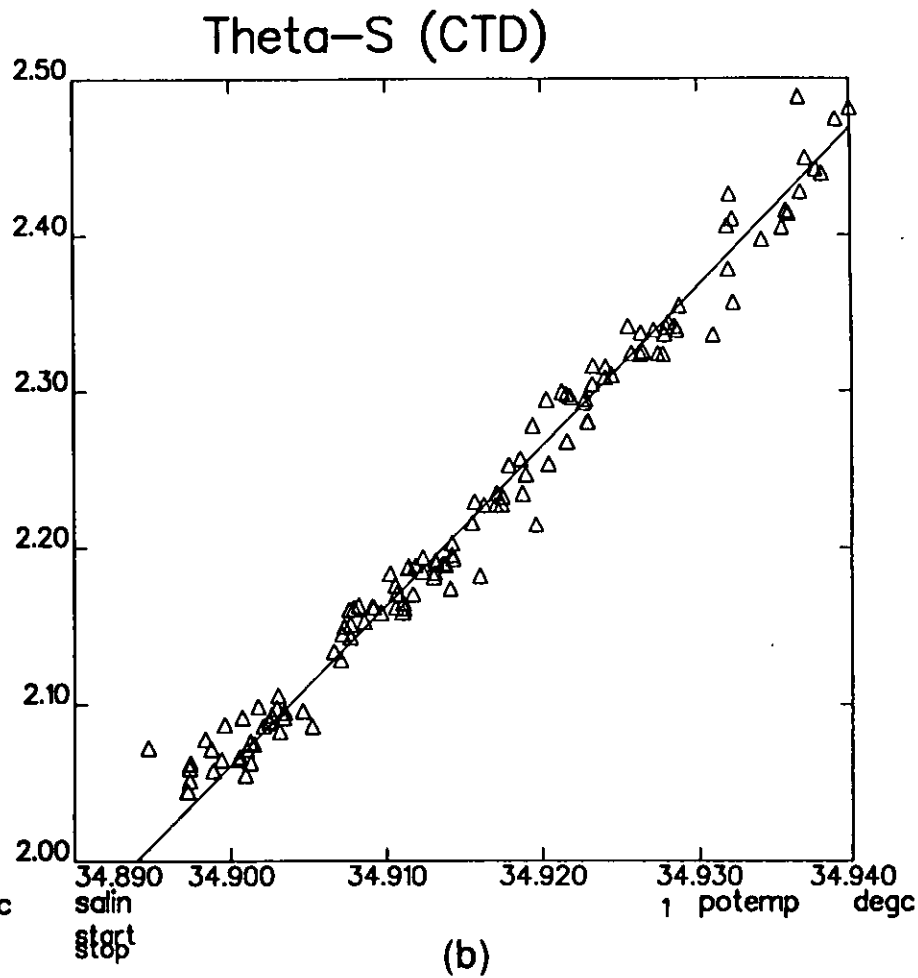
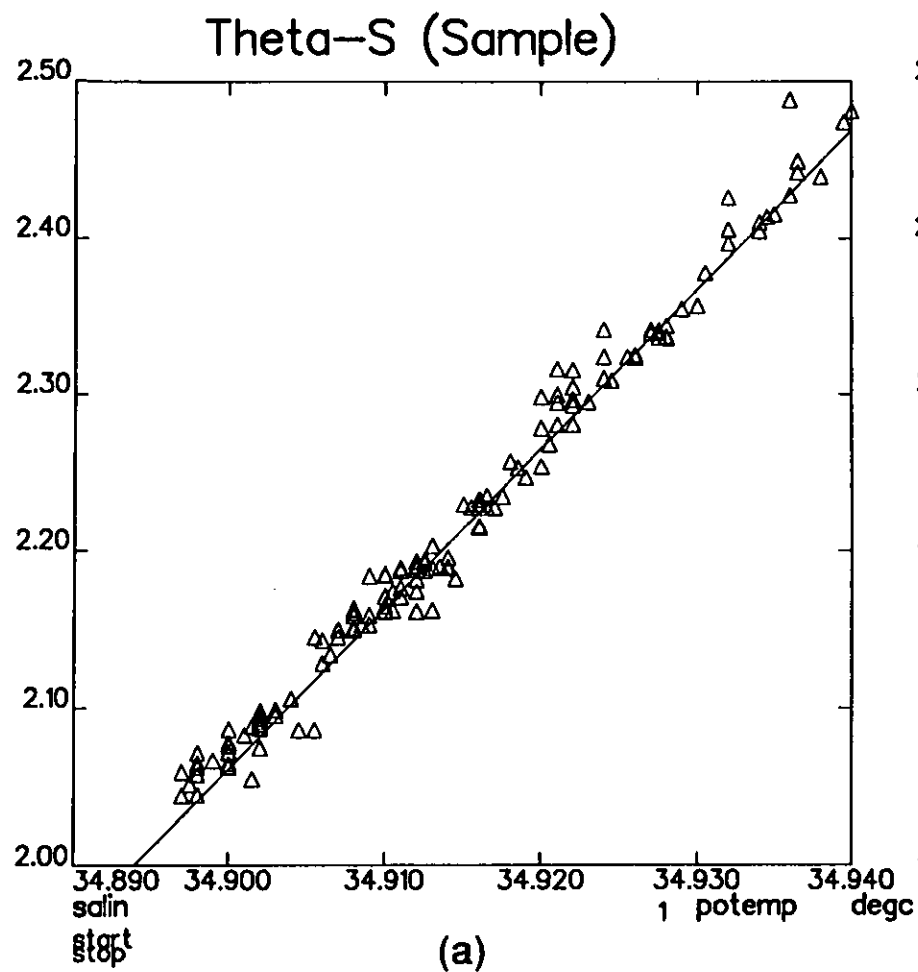


Figure 3 Theta-S plots for Cruise 189 sample data (a), and CTD data (b). CTD data are CTD salinities corresponding to closure of Niskin bottles. The straight lines show the Saunders (1986) relation.

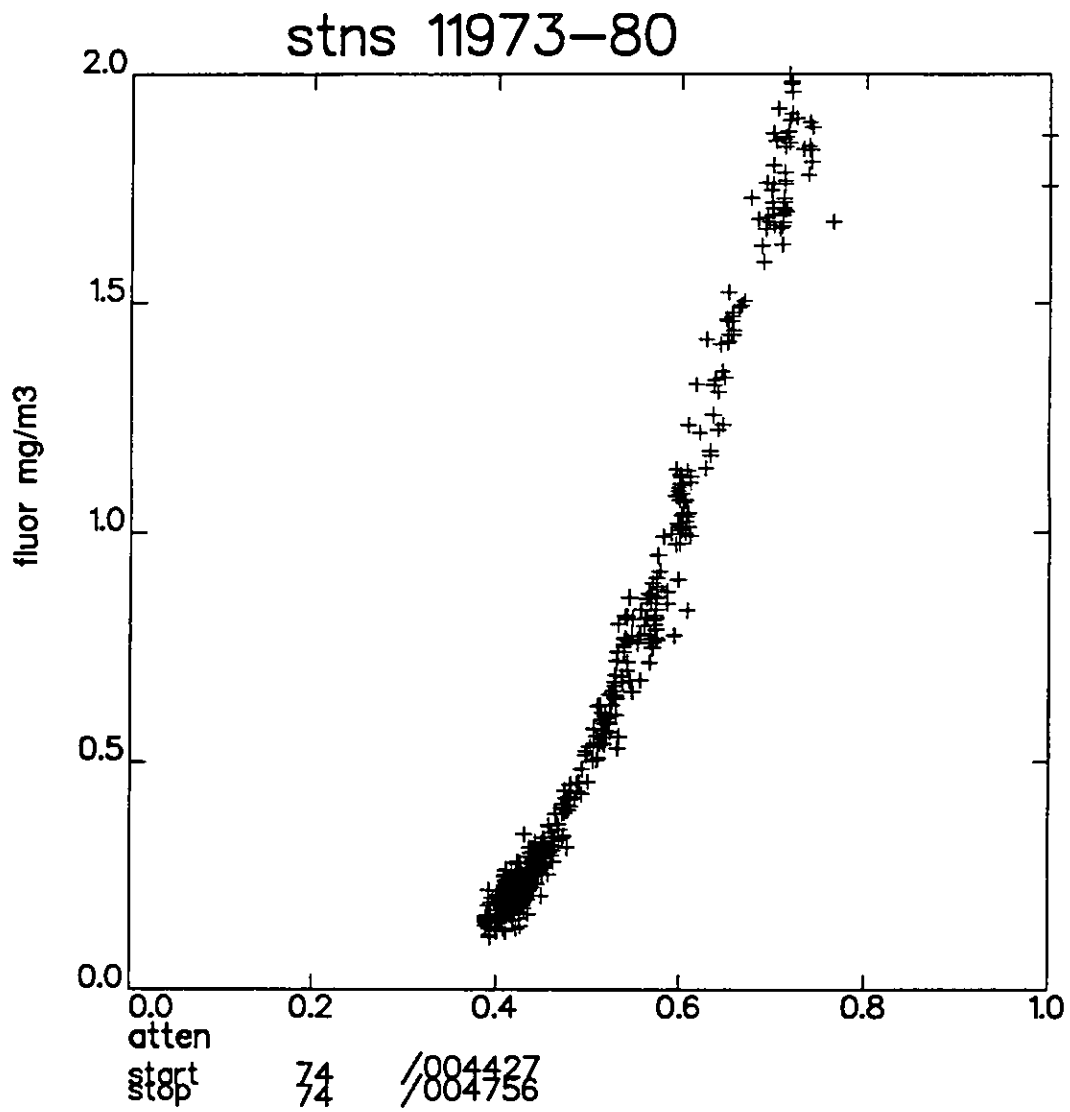


Figure 4 Fluorescence (calibrated into mg/m3 of chlorophyll) v Attenuation, for stations 11973 - 11980.



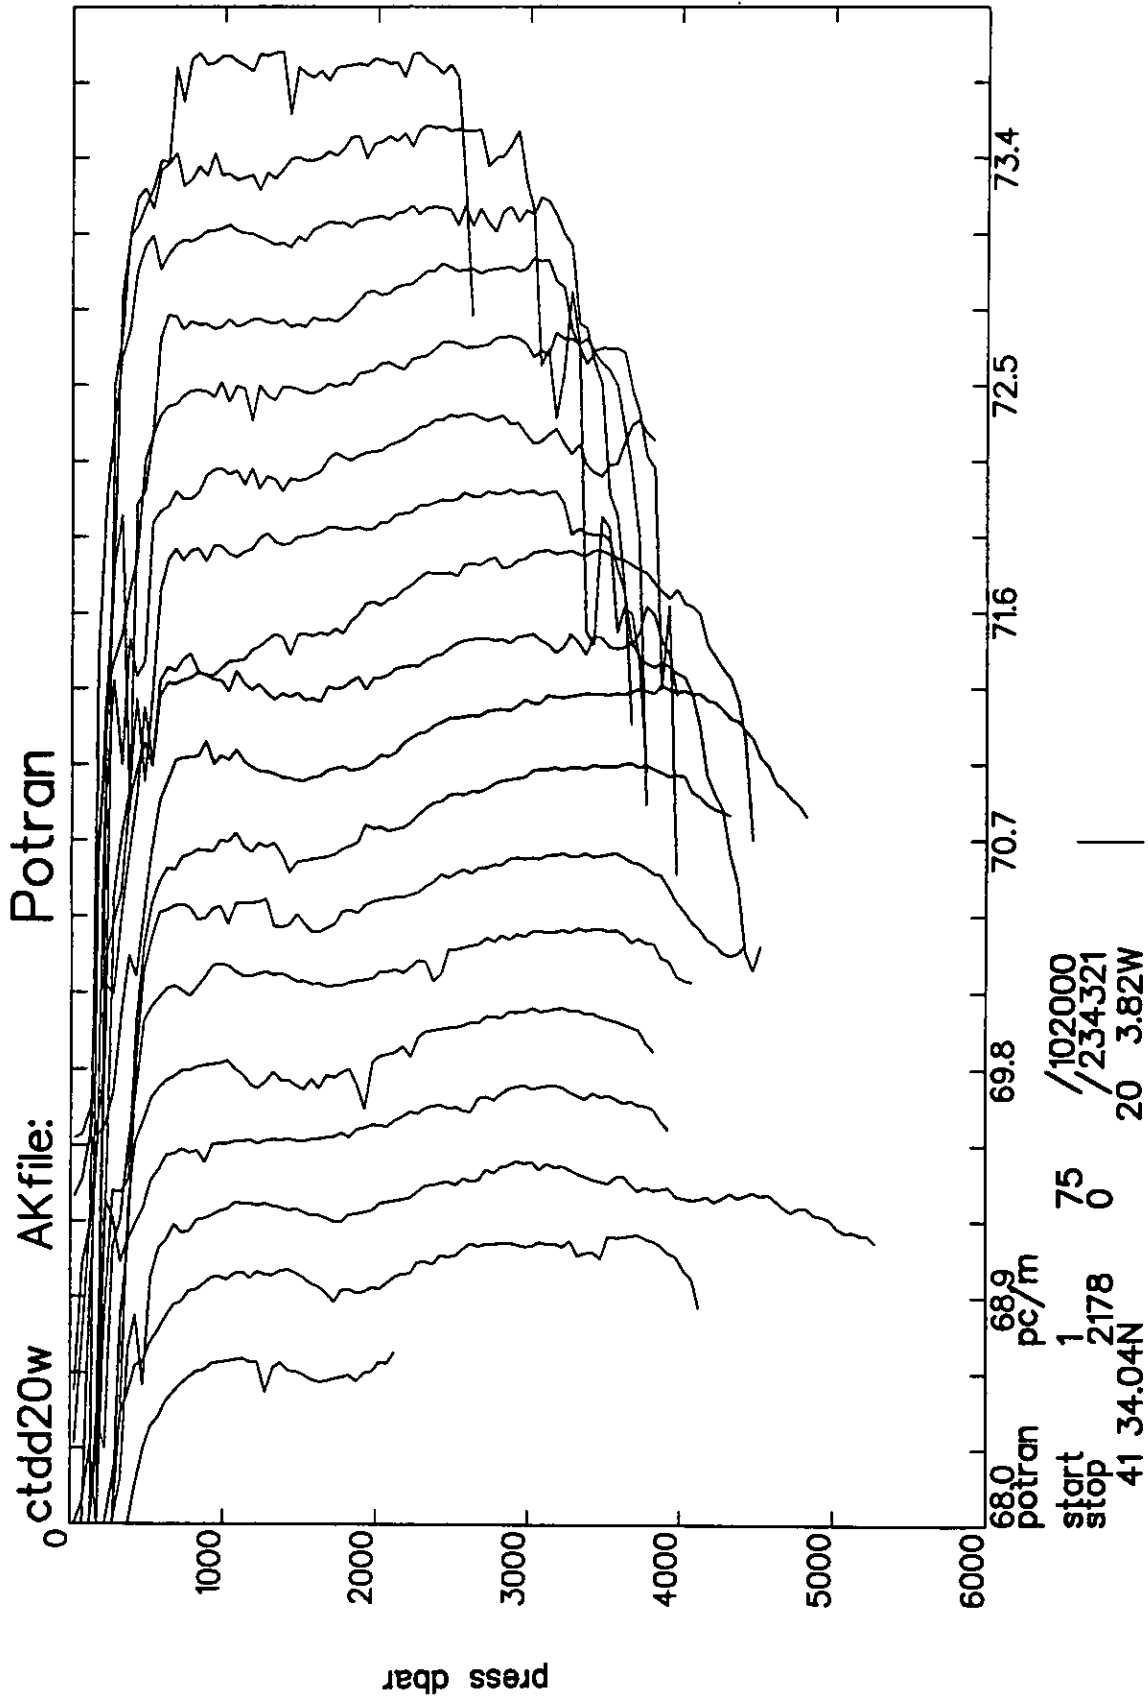


Figure 5 Offset profiles of potential transmittance, for stations on 20°W.

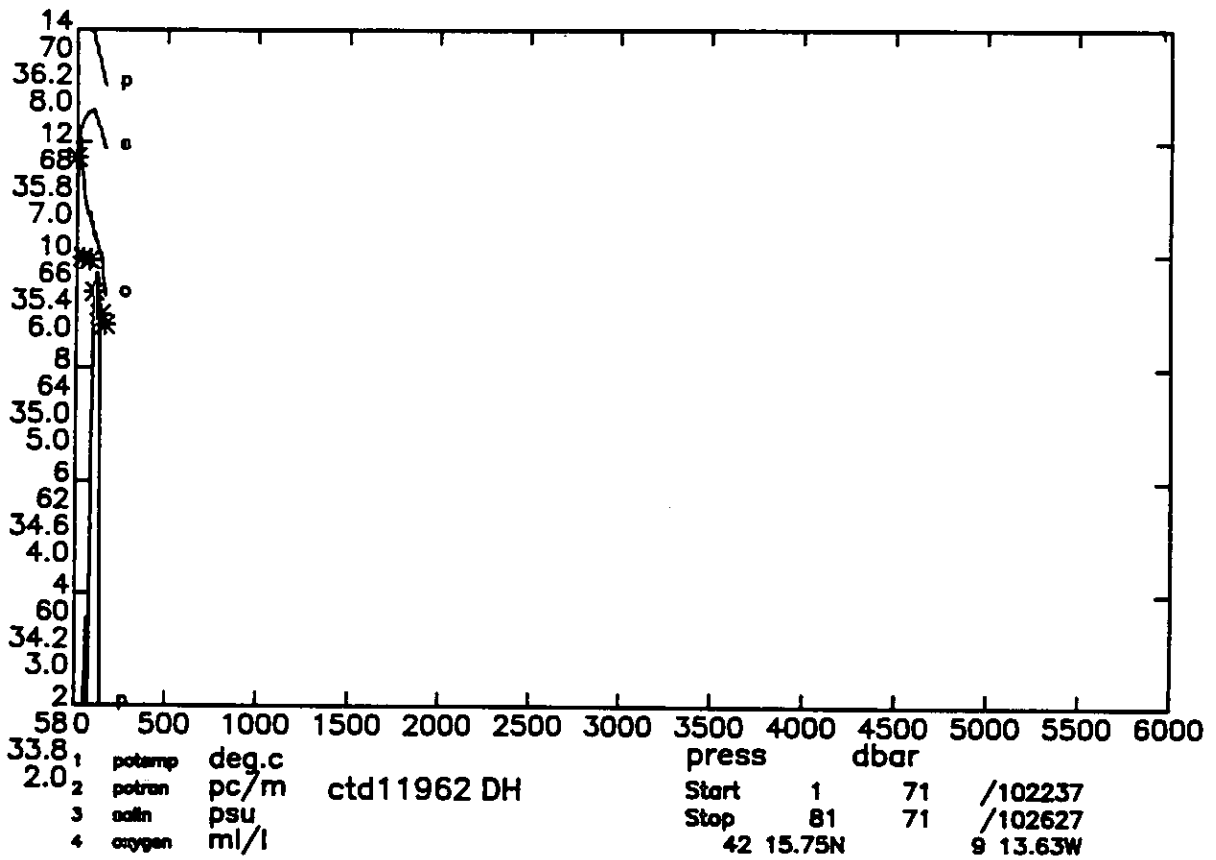
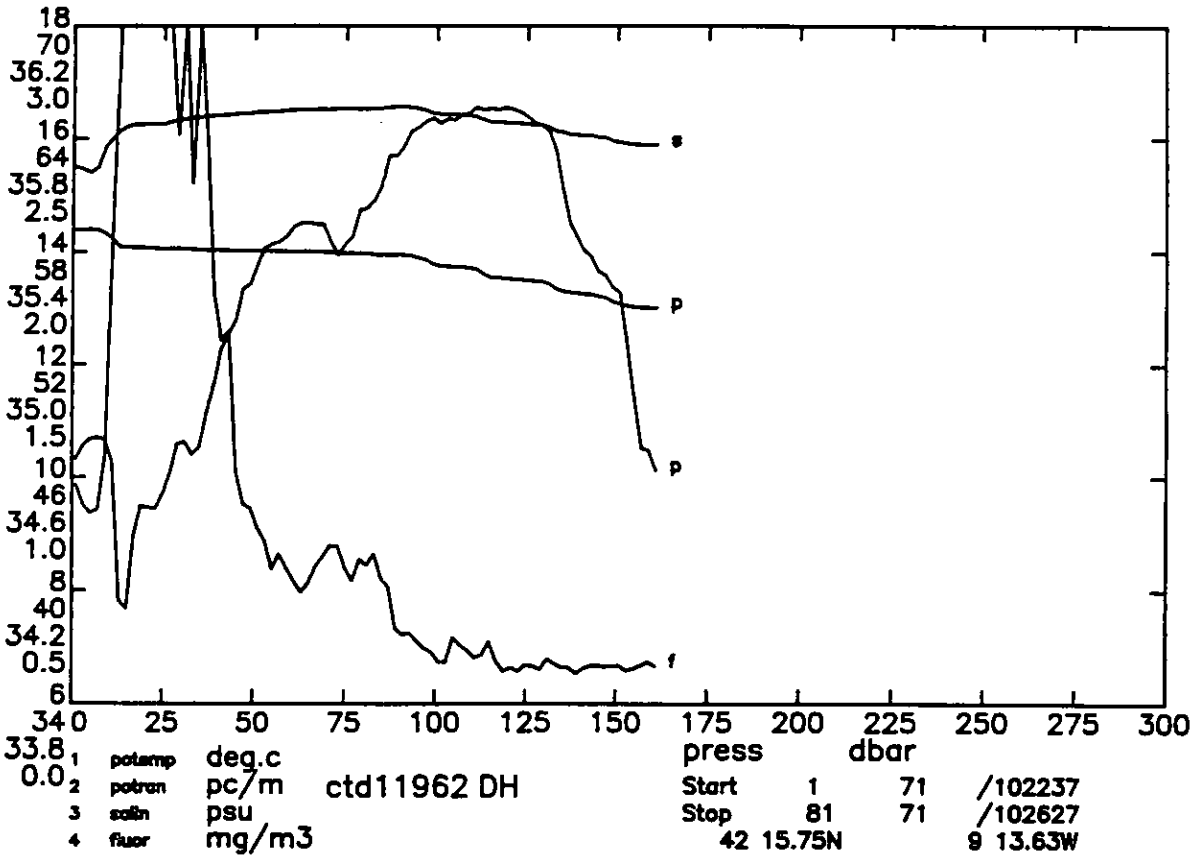


DISCOVERY CRUISE 189 STATION 11962

pres db	temp degc90	salin	oxygen ml/l	potemp degc90	potran ‰/m	fluor mg/m ³	sigma0 kg/m ³	sigma2 kg/m ³	sigma4 kg/m ³	dynht dyn.m	sndv m/s	depth m	svanom 10 ⁻⁸ m ³ /kg	bvfr cy/hr
10.	14.285	35.785	7.00	14.283	47.45	1.57	26.734	35.365	43.621	0.014	1505.5	10.	130.35	-9.999
20.	14.082	35.852	7.01	14.079	44.45	3.22	26.829	35.467	43.729	0.026	1505.1	20.	121.66	5.480
30.	14.067	35.868	6.73	14.062	47.83	2.83	26.845	35.483	43.746	0.038	1505.2	30.	120.44	2.262
40.	14.040	35.883	6.54	14.034	51.87	1.71	26.862	35.501	43.765	0.050	1505.3	40.	119.10	2.347
50.	14.034	35.893	6.44	14.027	56.83	0.82	26.872	35.511	43.775	0.062	1505.5	50.	118.48	1.772
60.	14.024	35.902	6.36	14.016	59.10	0.57	26.881	35.521	43.784	0.074	1505.6	60.	117.93	1.694
70.	14.014	35.905	6.34	14.004	59.01	0.67	26.886	35.526	43.790	0.086	1505.7	69.	117.80	1.225
80.	13.991	35.906	6.27	13.979	60.27	0.62	26.892	35.533	43.798	0.097	1505.8	79.	117.55	1.378
90.	13.967	35.915	6.22	13.954	63.35	0.32	26.905	35.546	43.812	0.109	1505.9	89.	116.67	1.998
100.	13.793	35.889	6.20	13.779	64.98	0.21	26.921	35.570	43.842	0.121	1505.5	99.	115.37	2.320
120.	13.546	35.855	6.06	13.529	65.61	0.15	26.947	35.605	43.886	0.144	1505.0	119.	113.53	2.025
140.	13.282	35.811	5.96	13.263	58.40	0.15	26.968	35.637	43.928	0.166	1504.4	139.	112.04	1.872
160.	13.028	35.777	5.67	13.006	46.88	0.18	26.994	35.673	43.973	0.188	1503.9	159.	110.15	2.038

Sample data

160.	13.029	35.778	5.38	13.007
135.	13.312	35.822	5.47	13.293
101.	13.776	35.885	5.67	13.762
72.	14.003	35.902	5.95	13.992
36.	14.045	35.874	5.97	14.040
5.	14.384	35.692	6.86	14.384

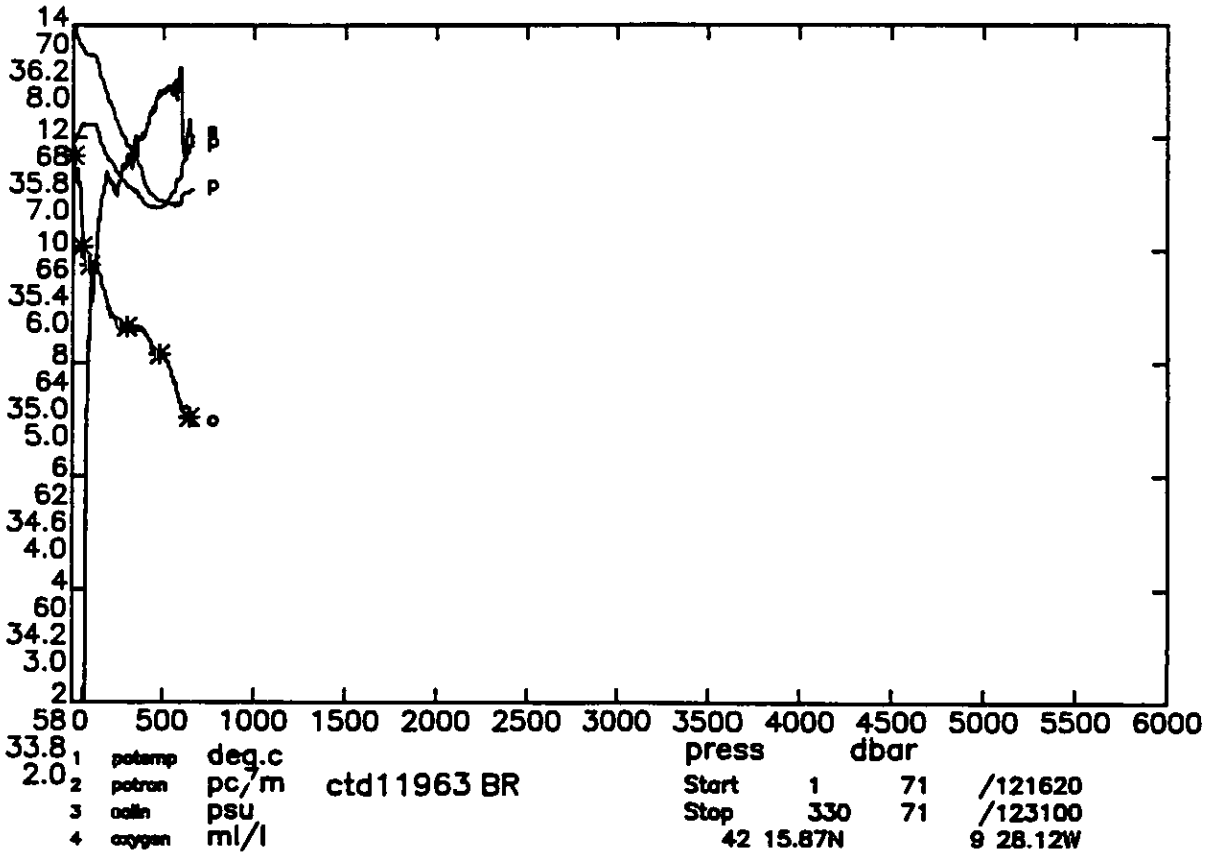
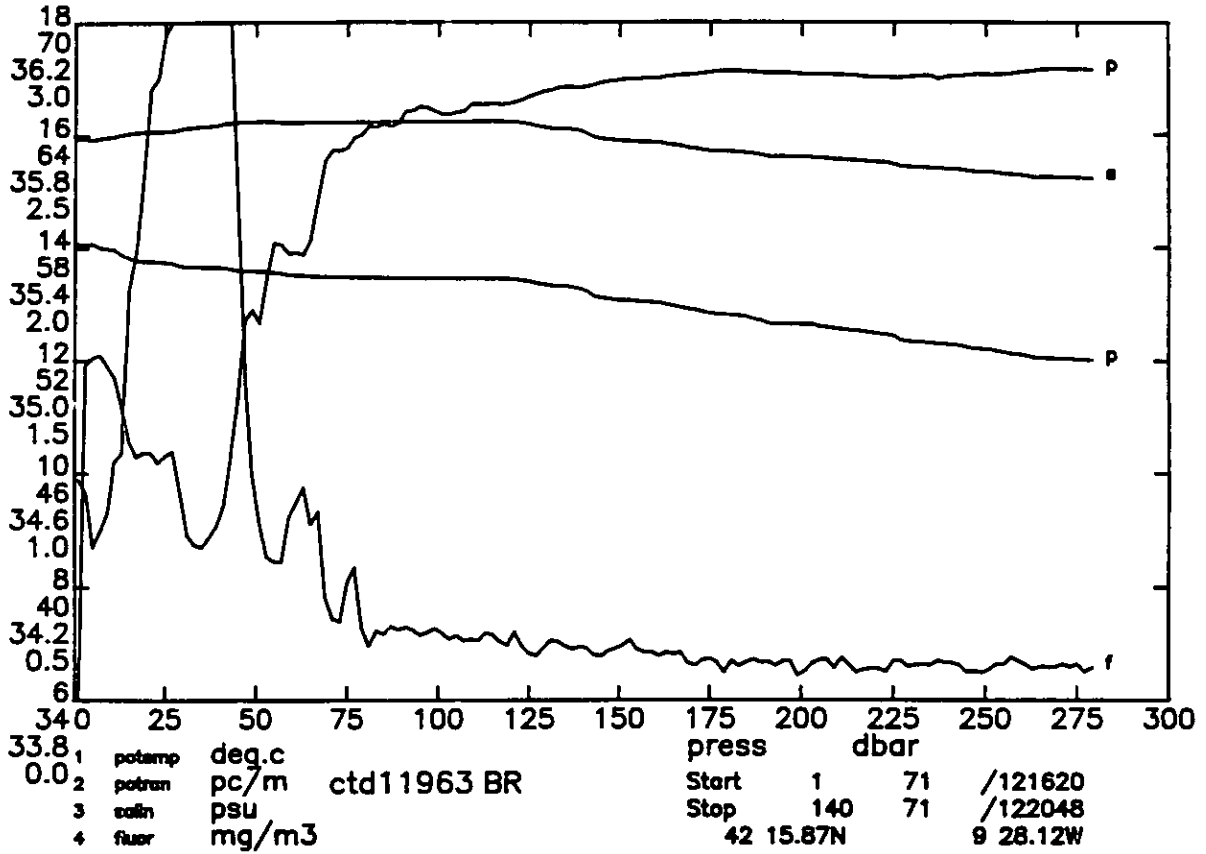


DISCOVERY CRUISE 189 STATION 11963

pres db	temp degc90	salin	oxygen ml/l	potemp degc90	potran %/m	fluor mg/m ³	sigma0 kg/m ³	sigma2 kg/m ³	sigma4 kg/m ³	dynht dyn.m	snav m/s	depth m	svanom 10 ⁻⁸ m ³ /kg	bvfr cy/hr
10.	13.984	35.793	6.67	13.982	51.39	0.94	26.804	35.446	43.712	0.013	1504.5	10.	123.67	-9.999
20.	13.773	35.813	6.62	13.770	47.09	2.50	26.864	35.514	43.787	0.025	1504.0	20.	118.30	4.349
30.	13.685	35.823	6.56	13.680	43.88	5.85	26.891	35.544	43.820	0.036	1503.9	30.	116.09	2.902
40.	13.663	35.837	6.19	13.658	43.76	4.65	26.906	35.560	43.837	0.048	1504.0	40.	114.93	2.212
50.	13.601	35.848	6.03	13.594	54.36	0.88	26.928	35.584	43.863	0.059	1504.0	50.	113.13	2.651
60.	13.531	35.843	5.94	13.522	57.74	0.84	26.939	35.598	43.880	0.070	1503.9	60.	112.37	1.886
70.	13.501	35.845	5.87	13.491	62.92	0.41	26.947	35.607	43.890	0.082	1504.0	69.	111.94	1.568
80.	13.492	35.845	5.85	13.480	64.25	0.28	26.950	35.610	43.893	0.093	1504.1	79.	112.02	0.875
90.	13.482	35.847	5.86	13.469	64.95	0.32	26.953	35.614	43.897	0.104	1504.3	89.	111.96	1.105
100.	13.478	35.847	5.84	13.464	65.17	0.31	26.954	35.615	43.899	0.115	1504.4	99.	112.18	0.559
120.	13.463	35.846	5.84	13.446	65.70	0.27	26.957	35.619	43.903	0.138	1504.7	119.	112.53	0.657
140.	13.263	35.808	5.78	13.244	66.54	0.23	26.969	35.639	43.931	0.160	1504.3	139.	111.94	1.417
160.	13.048	35.771	5.65	13.026	67.00	0.20	26.985	35.663	43.963	0.182	1503.9	159.	111.00	1.599
180.	12.830	35.739	5.53	12.805	67.39	0.15	27.005	35.692	44.000	0.205	1503.5	179.	109.62	1.817
200.	12.667	35.720	5.41	12.639	67.20	0.12	27.023	35.717	44.032	0.226	1503.2	198.	108.39	1.739
220.	12.515	35.702	5.41	12.486	67.06	0.14	27.040	35.740	44.060	0.248	1503.0	218.	107.34	1.649
240.	12.325	35.678	5.36	12.292	67.12	0.17	27.059	35.767	44.095	0.269	1502.7	238.	105.99	1.792
260.	12.147	35.657	5.30	12.113	67.37	0.17	27.078	35.793	44.127	0.290	1502.4	258.	104.73	1.744
280.	12.045	35.644	5.30	12.008	67.46	0.14	27.088	35.808	44.147	0.311	1502.4	278.	104.22	1.338
300.	11.886	35.625	5.31	11.847	67.69	0.16	27.104	35.830	44.175	0.332	1502.1	297.	103.20	1.621
350.	11.706	35.605	5.29	11.660	67.67	0.15	27.124	35.858	44.210	0.383	1502.3	347.	102.51	1.171
400.	11.179	35.561	5.24	11.129	68.15	0.20	27.189	35.945	44.318	0.433	1501.3	396.	97.31	2.089
450.	10.984	35.550	5.11	10.927	68.64	0.16	27.217	35.981	44.362	0.481	1501.4	446.	95.80	1.369
500.	10.915	35.564	5.05	10.852	68.85	0.15	27.242	36.009	44.392	0.529	1502.0	495.	94.69	1.264
550.	10.879	35.607	4.81	10.810	68.92	0.21	27.283	36.051	44.435	0.576	1502.8	545.	92.04	1.622
600.	11.063	35.710	4.59	10.987	67.97	0.17	27.331	36.091	44.467	0.621	1504.4	594.	89.02	1.698
650.	11.158	35.801	4.49	11.074	67.97	0.15	27.386	36.141	44.512	0.665	1505.6	644.	85.28	1.837

Sample data

637.	11.113	35.757	4.52	11.032
470.	10.941	35.552	5.08	10.882
289.	11.943	35.632	5.32	11.905
86.	13.484	35.846	5.87	13.472
42.	13.640	35.837	6.03	13.634
5.	14.087	35.785	6.84	14.087

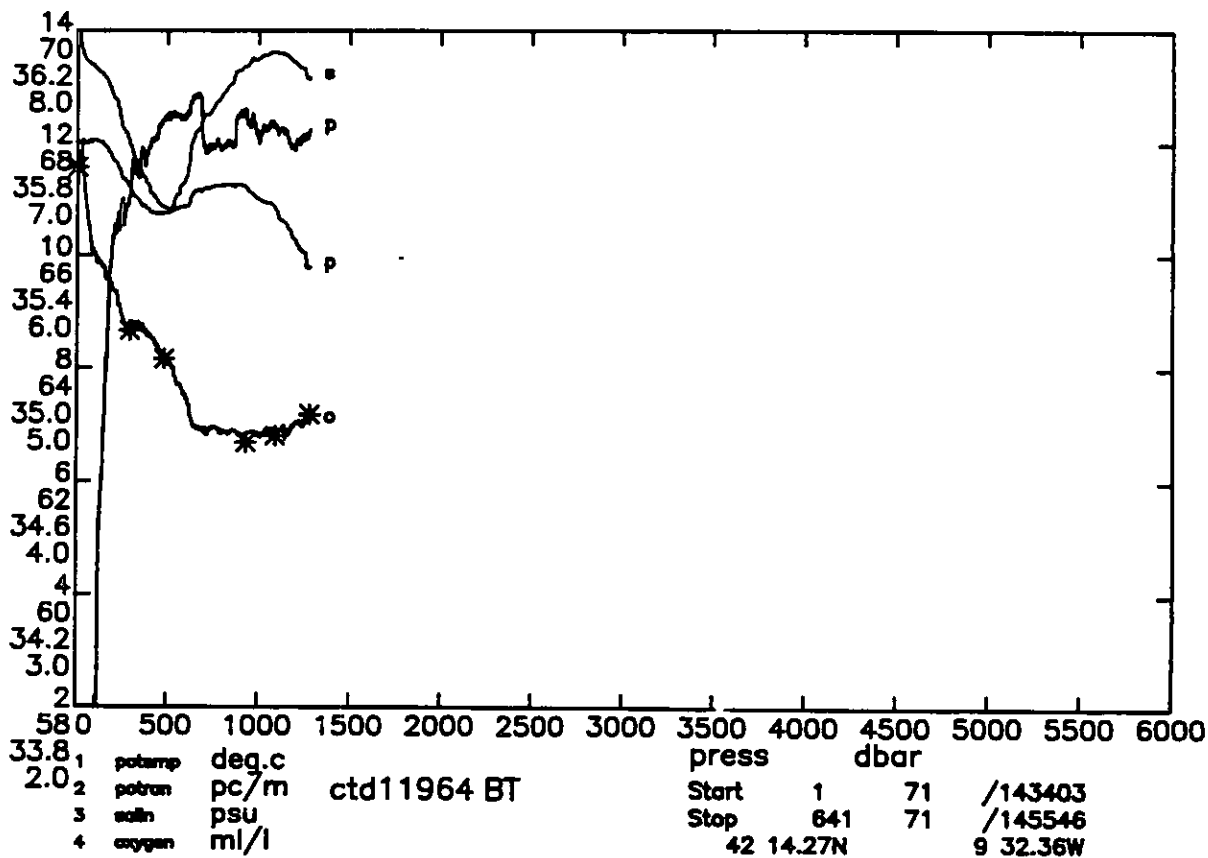
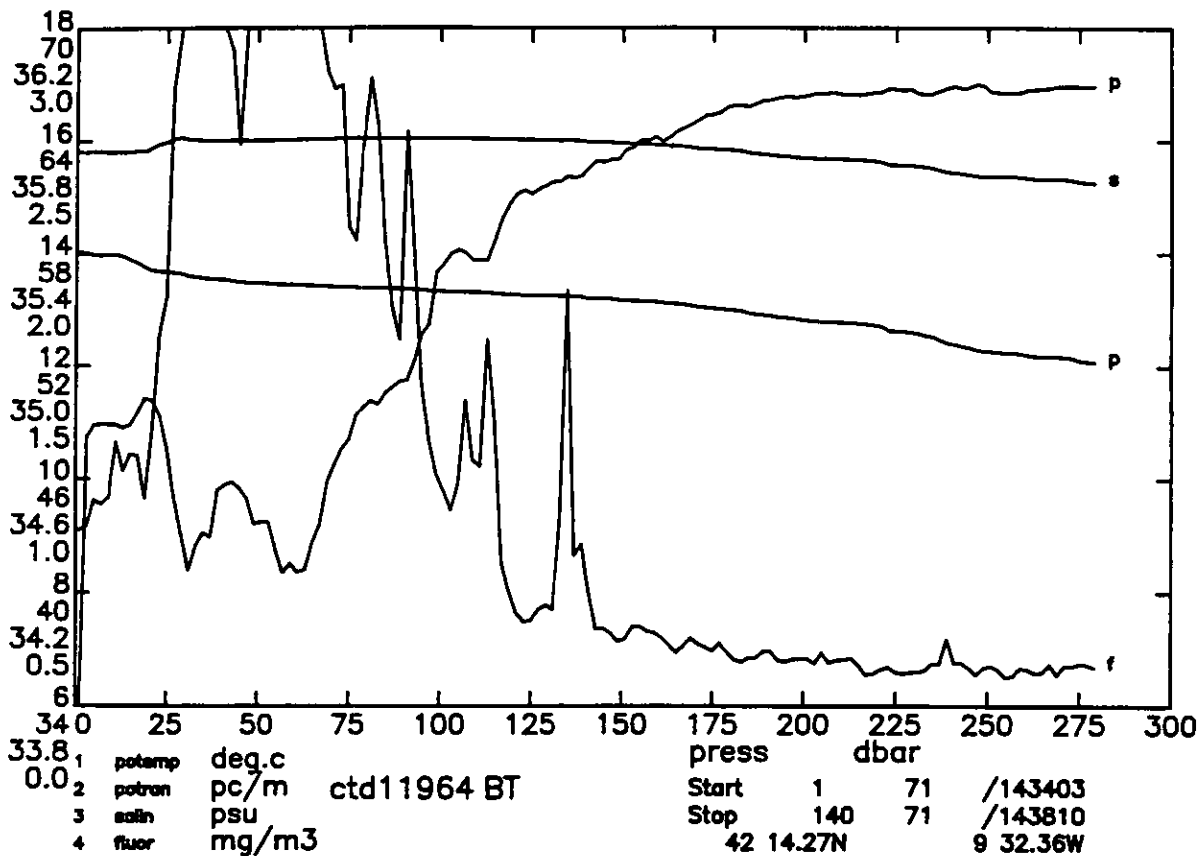




DISCOVERY CRUISE 189 STATION 11964

pres db	temp degc90	salin	oxygen ml/l	potemp degc90	potran %/m	fluor mg/m ³	sigma0 kg/m ³	sigma2 kg/m ³	sigma4 kg/m ³	dynht dyn.m	sndv m/s	depth m	svanom 10 ⁻⁸ m ³ /kg	bvfr cy/hr
10.	13.984	35.760	6.87	13.983	48.87	1.04	26.779	35.421	43.688	0.013	1504.5	10.	126.08	-9.999
20.	13.736	35.769	6.92	13.734	50.22	1.06	26.838	35.490	43.765	0.025	1503.9	20.	120.78	4.324
30.	13.633	35.807	6.82	13.629	42.11	4.71	26.889	35.544	43.822	0.037	1503.7	30.	116.22	4.028
40.	13.555	35.799	6.60	13.549	45.55	4.16	26.899	35.558	43.839	0.048	1503.6	40.	115.56	1.797
50.	13.490	35.800	6.44	13.483	43.67	5.98	26.914	35.574	43.858	0.060	1503.6	50.	114.49	2.143
60.	13.461	35.804	6.30	13.453	41.29	6.05	26.923	35.585	43.870	0.071	1503.7	60.	113.89	1.741
70.	13.433	35.808	6.19	13.424	46.28	2.77	26.932	35.595	43.880	0.083	1503.7	69.	113.35	1.680
80.	13.410	35.809	6.04	13.399	49.98	2.64	26.938	35.602	43.888	0.094	1503.8	79.	113.10	1.356
90.	13.396	35.810	6.04	13.383	51.22	2.08	26.942	35.606	43.893	0.105	1503.9	89.	113.02	1.138
100.	13.354	35.809	6.02	13.340	57.22	0.98	26.951	35.617	43.905	0.117	1504.0	99.	112.49	1.666
120.	13.293	35.804	5.95	13.276	60.89	0.46	26.960	35.628	43.919	0.139	1504.1	119.	112.21	1.216
140.	13.236	35.797	5.90	13.217	62.38	0.61	26.966	35.637	43.930	0.161	1504.2	139.	112.21	1.004
160.	13.159	35.783	5.82	13.136	64.07	0.31	26.972	35.646	43.942	0.184	1504.3	159.	112.21	1.007
180.	13.021	35.765	5.72	12.996	65.82	0.22	26.986	35.666	43.967	0.206	1504.1	179.	111.43	1.513
200.	12.838	35.737	5.69	12.811	66.36	0.21	27.002	35.689	43.997	0.228	1503.8	198.	110.46	1.615
220.	12.741	35.723	5.65	12.711	66.55	0.15	27.012	35.703	44.015	0.251	1503.8	218.	110.11	1.248
240.	12.432	35.686	5.49	12.399	66.85	0.24	27.045	35.748	44.072	0.272	1503.1	238.	107.41	2.339
260.	12.248	35.667	5.38	12.213	66.64	0.16	27.066	35.777	44.108	0.294	1502.8	258.	105.87	1.879
280.	12.108	35.649	5.37	12.071	66.94	0.17	27.080	35.797	44.133	0.315	1502.6	278.	105.08	1.498
300.	11.905	35.624	5.40	11.866	67.56	0.16	27.100	35.825	44.169	0.336	1502.2	297.	103.63	1.830
350.	11.541	35.582	5.34	11.496	67.84	0.14	27.137	35.878	44.237	0.387	1501.7	347.	101.17	1.598
400.	11.184	35.555	5.28	11.133	67.90	0.14	27.183	35.939	44.312	0.437	1501.3	396.	97.88	1.756
450.	10.979	35.548	5.16	10.922	68.30	0.19	27.217	35.981	44.362	0.485	1501.4	446.	95.83	1.495
500.	10.887	35.552	5.07	10.825	68.47	0.15	27.238	36.006	44.390	0.533	1501.9	495.	95.06	1.171
550.	10.897	35.614	4.86	10.828	68.49	0.19	27.285	36.053	44.436	0.580	1502.8	545.	91.85	1.732
600.	10.939	35.676	4.73	10.863	68.42	0.19	27.327	36.092	44.473	0.625	1503.9	594.	89.25	1.612
650.	11.216	35.833	4.49	11.133	68.83	0.15	27.400	36.152	44.521	0.668	1505.9	644.	84.03	2.091
700.	11.272	35.899	4.47	11.182	67.92	0.14	27.442	36.191	44.557	0.710	1507.0	693.	81.50	1.606
750.	11.313	35.924	4.47	11.215	67.89	0.19	27.456	36.203	44.567	0.751	1508.0	743.	81.63	0.893
800.	11.346	35.972	4.43	11.242	67.90	0.16	27.488	36.234	44.597	0.791	1509.0	792.	79.93	1.425
850.	11.353	36.011	4.45	11.242	67.92	0.17	27.519	36.264	44.626	0.831	1509.9	842.	78.40	1.384
900.	11.374	36.058	4.41	11.256	68.54	0.17	27.553	36.297	44.658	0.869	1510.8	891.	76.58	1.453
950.	11.250	36.085	4.43	11.126	68.28	0.17	27.598	36.347	44.712	0.907	1511.3	940.	73.45	1.730
1000.	11.121	36.101	4.40	10.991	68.02	0.15	27.635	36.389	44.760	0.943	1511.7	990.	71.03	1.585
1100.	10.913	36.124	4.43	10.771	68.27	0.15	27.693	36.456	44.834	1.012	1512.6	1088.	67.74	1.406
1200.	10.413	36.086	4.51	10.261	67.86	0.13	27.755	36.539	44.938	1.078	1512.5	1187.	63.27	1.534

Sample data

1279.	9.963	36.041	4.59	9.805
1091.	10.975	36.126	4.40	10.834
930.	11.323	36.045	4.34	11.201
481.	10.916	35.553	5.08	10.856
289.	12.004	35.640	5.33	11.966
5.	14.038	35.765	6.78	14.038

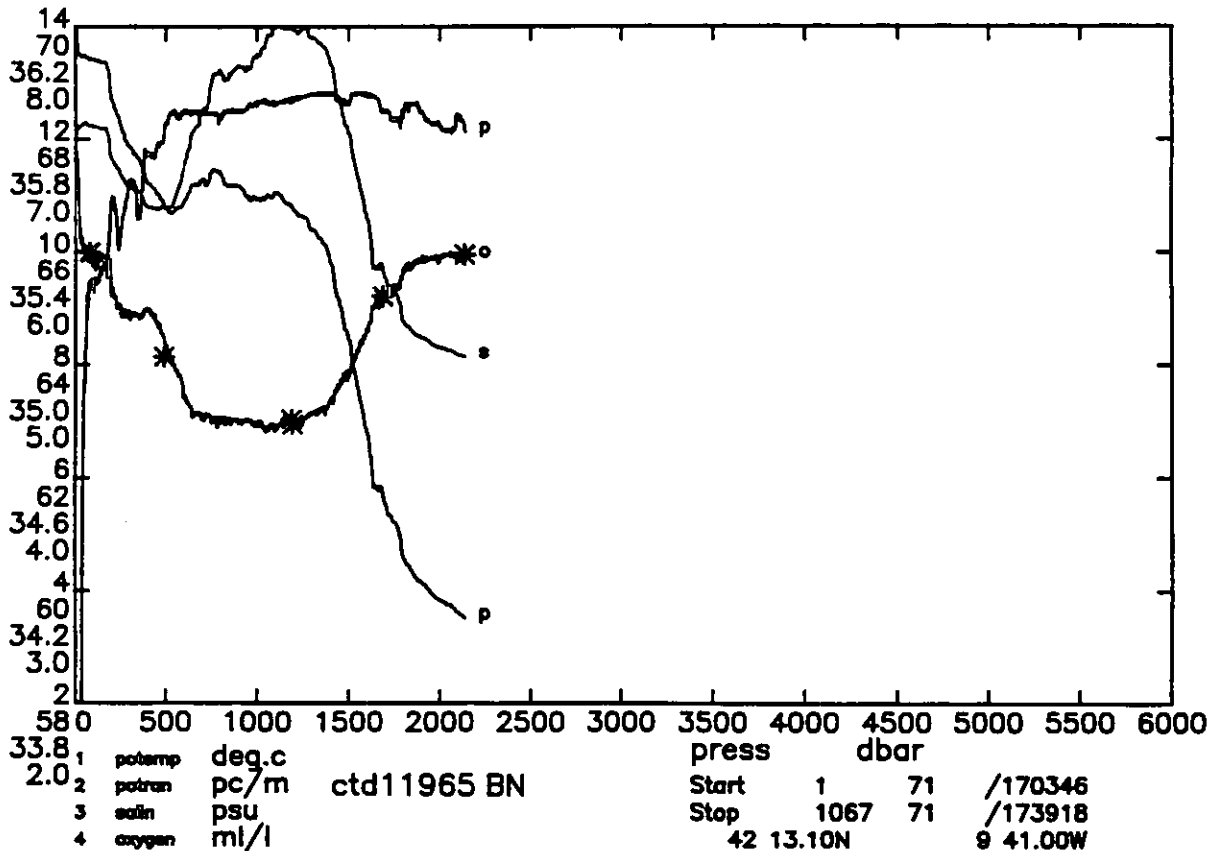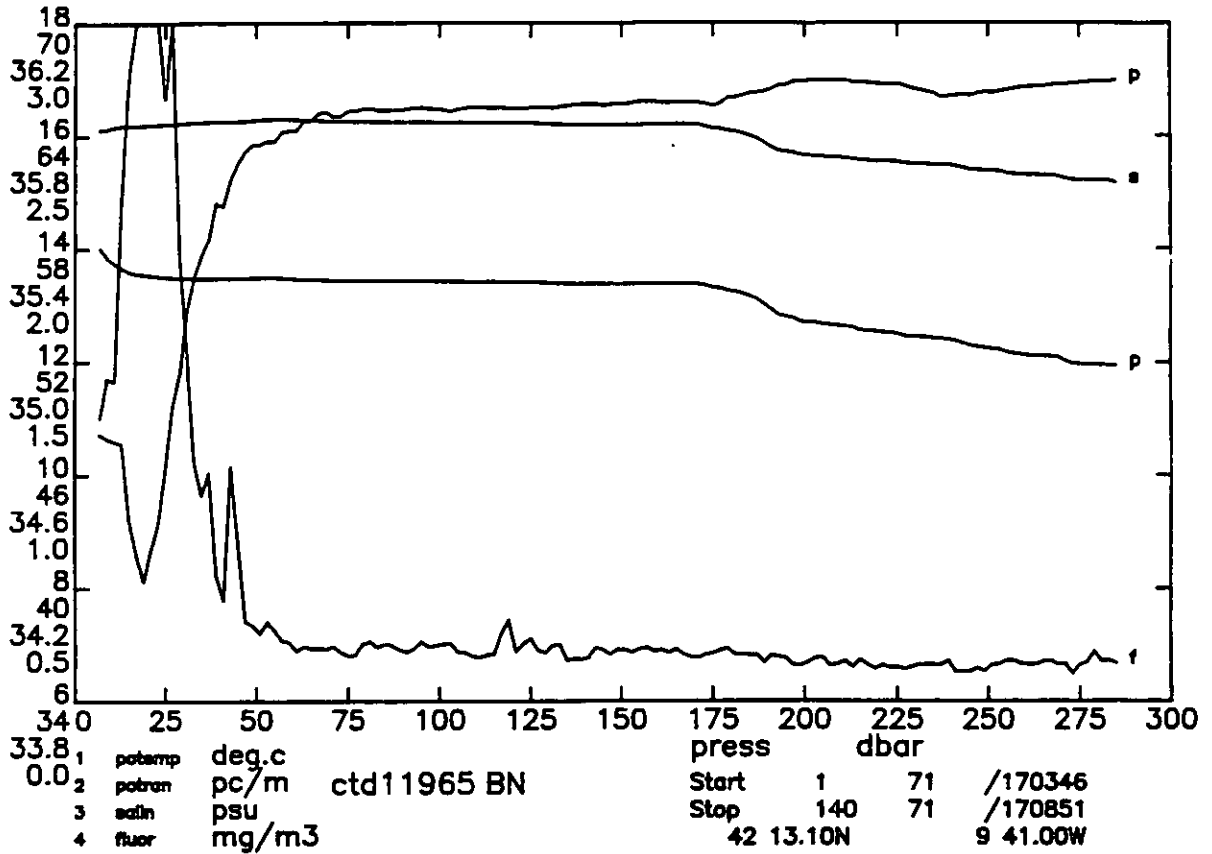

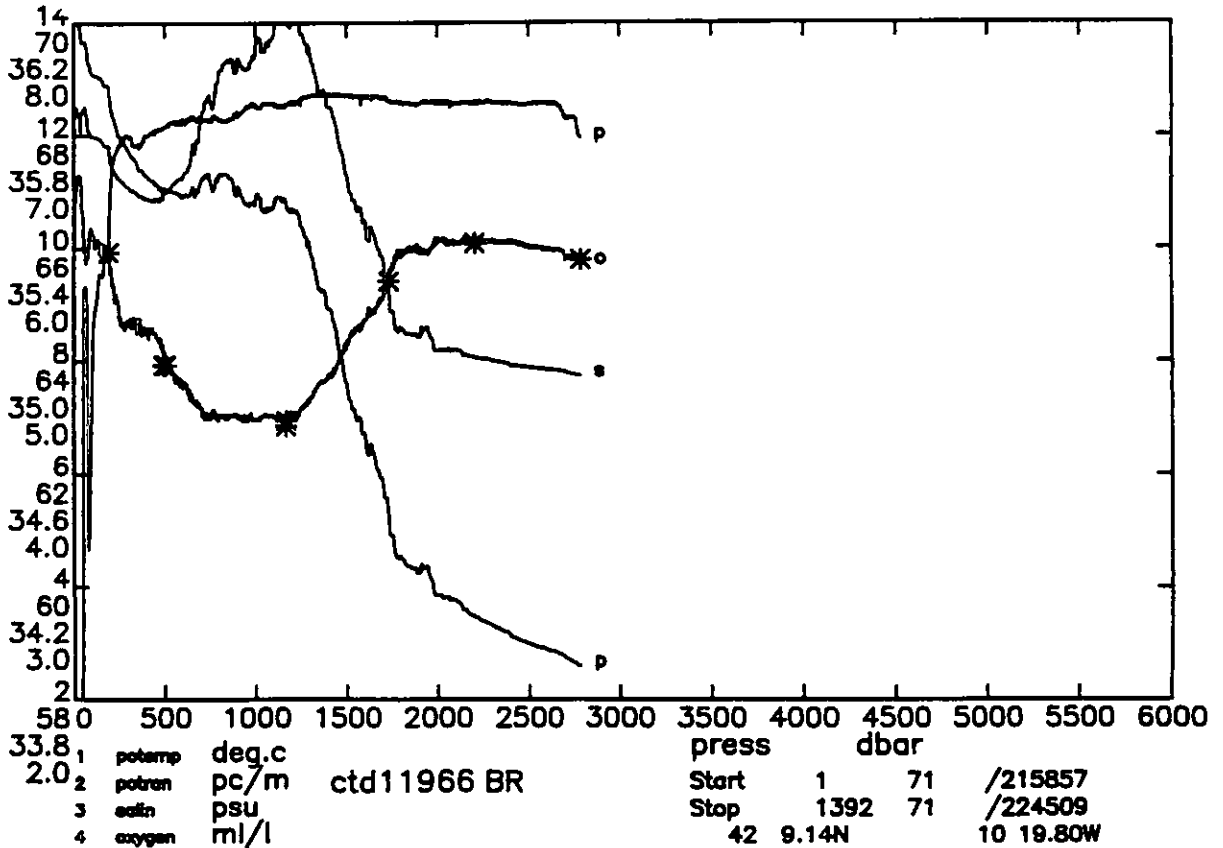
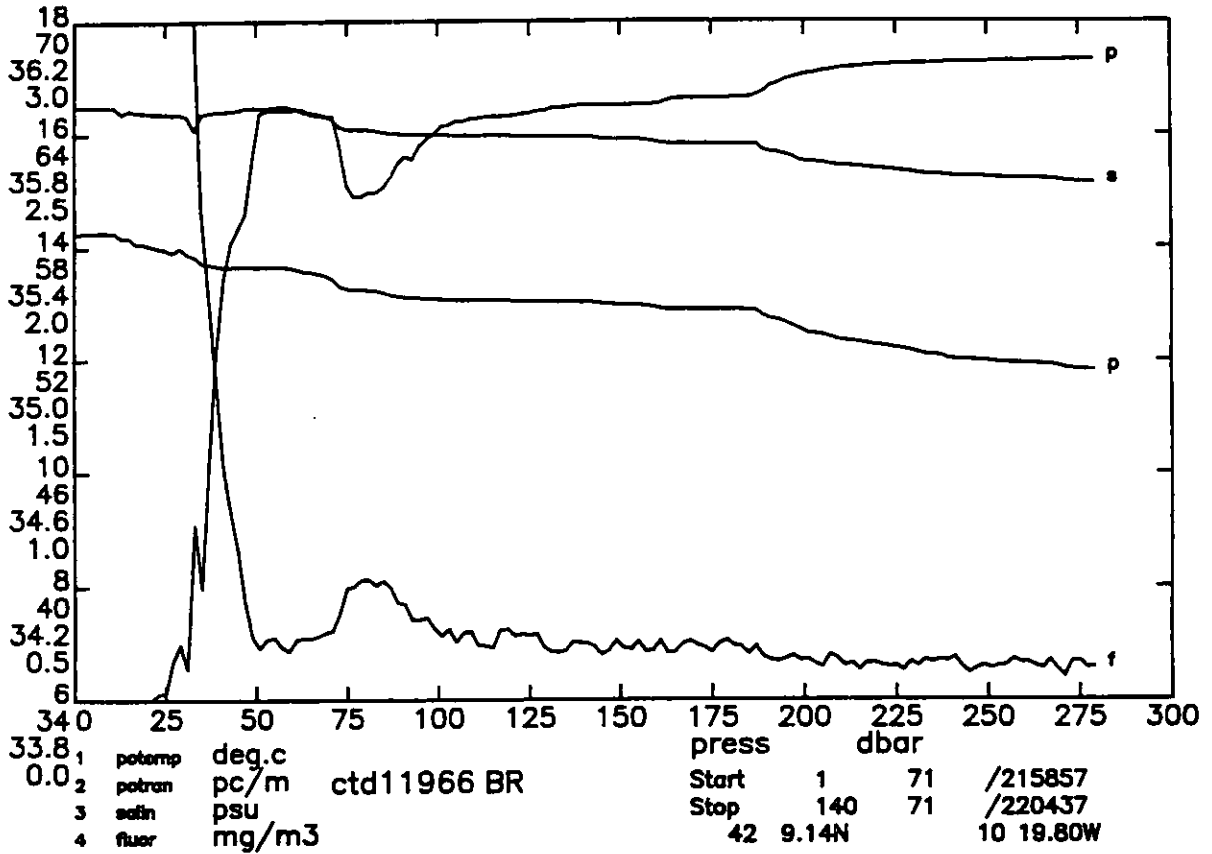


DISCOVERY CRUISE 189 STATION 11966

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ² /kg	cy/hr
10.	14.269	35.896	6.53	14.268	29.34	4.86	26.823	35.453	43.708	0.012	1505.6	10.	121.89	-9.999
20.	14.046	35.875	6.63	14.043	33.18	4.32	26.854	35.493	43.756	0.024	1505.0	20.	119.24	3.146
30.	13.942	35.865	6.59	13.938	36.30	3.76	26.869	35.512	43.778	0.036	1504.8	30.	118.17	2.150
40.	13.674	35.880	6.33	13.668	54.42	1.22	26.937	35.590	43.866	0.048	1504.1	40.	111.98	4.655
50.	13.666	35.893	6.04	13.659	63.86	0.25	26.949	35.602	43.878	0.059	1504.3	50.	111.15	1.955
60.	13.642	35.891	5.92	13.634	65.30	0.24	26.953	35.607	43.884	0.070	1504.4	60.	111.09	1.101
70.	13.487	35.857	5.97	13.477	64.95	0.30	26.960	35.620	43.903	0.081	1504.0	70.	110.77	1.458
80.	13.268	35.814	6.11	13.257	60.82	0.53	26.972	35.641	43.932	0.092	1503.4	80.	109.89	1.984
90.	13.140	35.798	6.18	13.128	62.61	0.43	26.986	35.660	43.956	0.103	1503.1	90.	108.86	2.107
100.	13.100	35.796	6.09	13.086	64.22	0.30	26.992	35.668	43.966	0.114	1503.1	100.	108.50	1.485
120.	13.070	35.792	6.01	13.054	65.00	0.30	26.996	35.673	43.972	0.136	1503.3	120.	108.75	0.758
140.	13.041	35.788	6.00	13.022	65.54	0.25	26.999	35.678	43.977	0.157	1503.6	140.	109.04	0.725
160.	12.944	35.768	6.01	12.921	65.60	0.24	27.004	35.686	43.990	0.179	1503.6	160.	109.15	0.898
180.	12.905	35.761	6.00	12.881	65.92	0.25	27.007	35.691	43.996	0.201	1503.8	180.	109.45	0.690
200.	12.521	35.700	5.82	12.494	67.13	0.18	27.037	35.737	44.057	0.223	1502.7	200.	107.07	2.227
220.	12.278	35.673	5.53	12.249	67.64	0.16	27.064	35.773	44.103	0.244	1502.2	220.	105.00	2.097
240.	12.041	35.648	5.51	12.009	67.81	0.18	27.091	35.810	44.149	0.265	1501.7	240.	102.87	2.120
260.	11.962	35.639	5.33	11.928	67.88	0.16	27.099	35.822	44.164	0.285	1501.8	260.	102.60	1.175
280.	11.846	35.624	5.32	11.810	67.97	0.15	27.110	35.838	44.184	0.306	1501.7	280.	102.04	1.364
300.	11.745	35.612	5.35	11.706	67.97	0.12	27.121	35.853	44.203	0.326	1501.6	300.	101.50	1.345
350.	11.474	35.588	5.33	11.429	67.84	0.16	27.154	35.898	44.258	0.376	1501.5	350.	99.54	1.487
400.	11.319	35.575	5.29	11.268	68.00	0.15	27.174	35.924	44.291	0.426	1501.8	400.	98.88	1.153
450.	11.200	35.575	5.21	11.143	68.11	0.18	27.197	35.952	44.324	0.475	1502.2	450.	97.88	1.244
500.	11.113	35.598	4.99	11.050	68.17	0.13	27.232	35.991	44.366	0.524	1502.7	495.	95.80	1.502
550.	11.061	35.634	4.85	10.991	68.25	0.15	27.271	36.031	44.408	0.571	1503.4	545.	93.40	1.573
600.	10.997	35.657	4.81	10.921	68.26	0.15	27.302	36.065	44.444	0.617	1504.1	594.	91.66	1.424
650.	11.169	35.765	4.65	11.086	68.31	0.12	27.356	36.111	44.482	0.662	1505.6	644.	88.15	1.795
700.	11.301	35.869	4.55	11.211	68.27	0.15	27.414	36.162	44.528	0.706	1507.0	693.	84.18	1.880
750.	11.243	35.914	4.52	11.146	68.25	0.14	27.461	36.211	44.578	0.747	1507.7	743.	81.05	1.727
800.	11.420	36.029	4.51	11.315	68.26	0.15	27.519	36.261	44.621	0.786	1509.3	792.	77.16	1.873
850.	11.356	36.062	4.51	11.244	68.26	0.13	27.557	36.302	44.663	0.824	1509.9	842.	74.81	1.571
900.	11.206	36.074	4.50	11.089	68.33	0.15	27.596	36.346	44.713	0.861	1510.3	891.	72.29	1.607
950.	10.902	36.035	4.47	10.780	68.50	0.15	27.622	36.386	44.765	0.897	1510.0	940.	70.49	1.443
1000.	11.065	36.136	4.47	10.935	68.50	0.16	27.673	36.429	44.801	0.931	1511.5	990.	67.40	1.717
1200.	10.840	36.209	4.48	10.684	68.60	0.15	27.775	36.540	44.921	1.060	1514.1	1187.	62.46	1.304
1300.	10.051	36.070	4.68	9.889	68.71	0.17	27.807	36.607	45.021	1.122	1512.8	1286.	59.87	1.306
1400.	9.069	35.897	4.86	8.904	68.71	0.16	27.837	36.681	45.137	1.180	1510.7	1384.	56.54	1.377
1500.	7.711	35.644	5.16	7.549	68.70	0.15	27.847	36.756	45.272	1.234	1507.0	1483.	53.19	1.348
1600.	6.827	35.485	5.35	6.663	68.68	0.17	27.848	36.800	45.356	1.287	1505.1	1581.	51.79	1.037
1700.	5.921	35.343	5.56	5.757	68.65	0.15	27.855	36.852	45.451	1.337	1503.0	1680.	49.18	1.191
1800.	4.651	35.112	5.92	4.494	68.56	0.14	27.822	36.885	45.546	1.386	1499.2	1778.	48.19	0.887
1900.	4.400	35.084	5.99	4.236	68.55	0.18	27.828	36.905	45.579	1.434	1499.8	1877.	47.56	0.776
2000.	4.006	35.034	6.06	3.838	68.56	0.12	27.830	36.929	45.622	1.481	1499.8	1975.	46.49	0.852
2100.	3.908	35.037	6.03	3.731	68.54	0.14	27.844	36.948	45.646	1.527	1501.1	2073.	45.75	0.771
2200.	3.627	35.009	6.05	3.445	68.58	0.17	27.850	36.969	45.682	1.572	1501.6	2171.	44.61	0.845
2300.	3.478	34.999	6.06	3.289	68.58	0.14	27.857	36.984	45.705	1.616	1502.6	2269.	44.02	0.717
2400.	3.303	34.980	6.04	3.107	68.57	0.14	27.860	36.997	45.727	1.660	1503.5	2368.	43.55	0.677
2500.	3.170	34.974	6.00	2.967	68.54	0.12	27.867	37.012	45.750	1.703	1504.7	2466.	42.81	0.733
2600.	3.074	34.966	5.97	2.863	68.54	0.14	27.871	37.022	45.764	1.746	1505.9	2564.	42.64	0.581
2700.	2.952	34.958	5.90	2.733	68.28	0.12	27.876	37.034	45.783	1.788	1507.1	2662.	42.09	0.676

Sample data

2782.	2.807	34.946	5.89	2.583
2199.	3.628	35.009	6.03	3.446
1727.	5.465	35.256	5.70	5.304
1162.	10.925	36.225	4.47	10.774
502.	11.108	35.591	4.96	11.045
187.	12.892	35.758	5.96	12.866

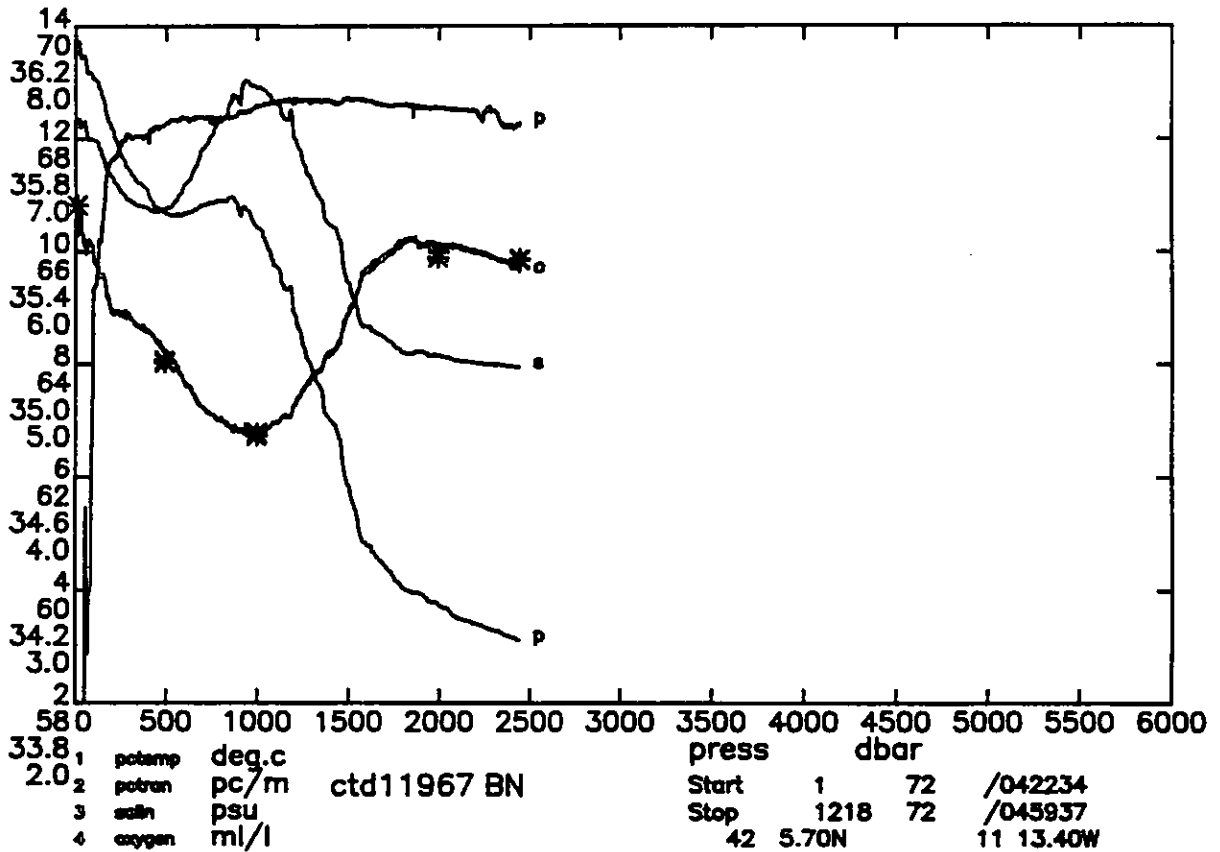
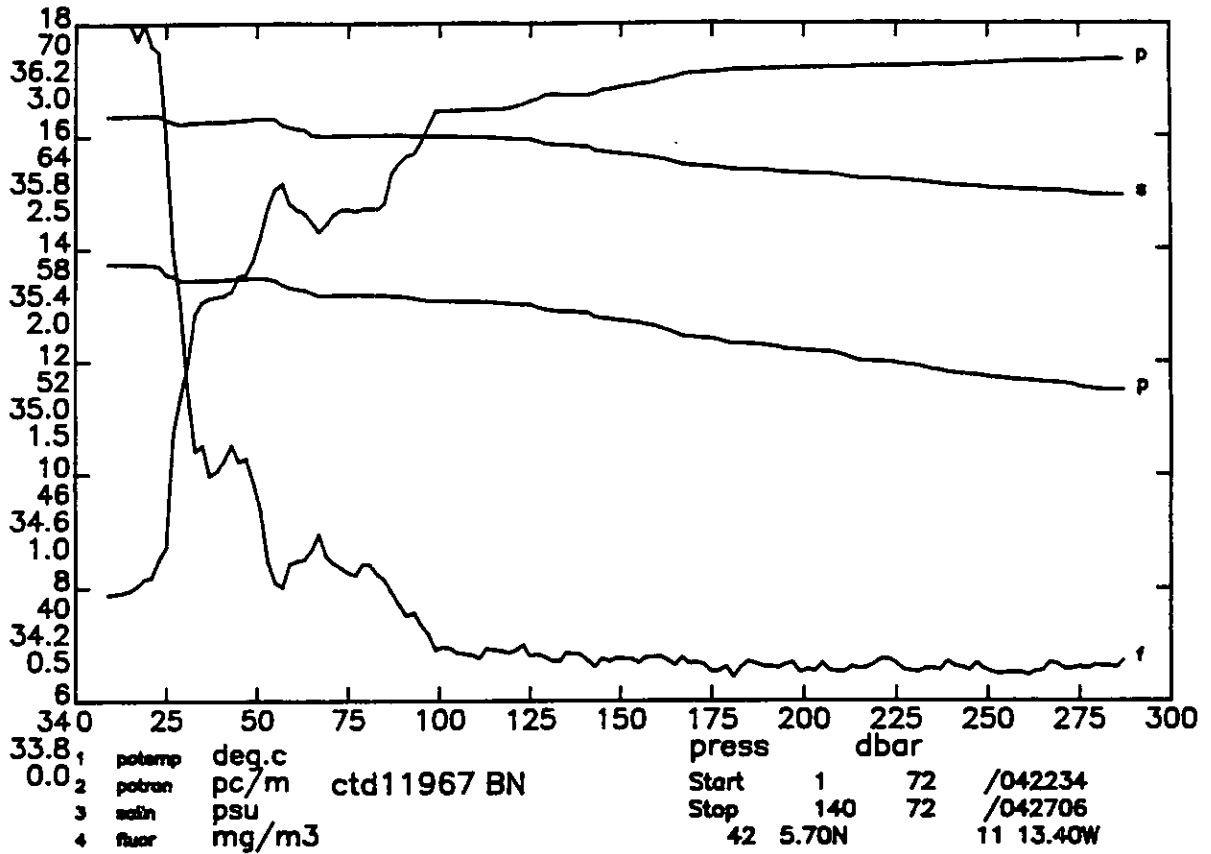


DISCOVERY CRUISE 189 STATION 11967

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	13.741	35.872	6.25	13.739	39.64	3.16	26.916	35.566	43.840	0.011	1503.8	10.	113.04	-9.999
20.	13.725	35.871	6.27	13.722	40.50	3.00	26.920	35.570	43.845	0.023	1503.9	20.	113.03	1.026
30.	13.446	35.842	6.31	13.442	51.04	1.56	26.955	35.617	43.901	0.034	1503.2	30.	109.96	3.360
40.	13.453	35.849	6.15	13.448	55.47	1.04	26.959	35.621	43.905	0.045	1503.4	40.	109.86	1.160
50.	13.489	35.862	6.06	13.482	58.00	0.91	26.962	35.622	43.905	0.056	1503.7	50.	109.90	0.947
60.	13.312	35.828	5.99	13.304	60.21	0.61	26.973	35.640	43.929	0.067	1503.2	60.	109.20	1.832
70.	13.181	35.800	6.11	13.171	59.54	0.62	26.978	35.651	43.945	0.078	1502.9	69.	108.97	1.327
80.	13.189	35.801	6.09	13.178	60.12	0.60	26.978	35.650	43.944	0.089	1503.1	79.	109.29	-0.265
90.	13.163	35.803	6.05	13.150	62.74	0.40	26.985	35.658	43.953	0.099	1503.2	89.	108.96	1.454
100.	13.088	35.797	5.93	13.074	65.33	0.23	26.996	35.672	43.970	0.110	1503.1	99.	108.19	1.896
120.	13.039	35.788	5.88	13.023	65.54	0.22	26.999	35.678	43.977	0.132	1503.2	119.	108.44	0.758
140.	12.884	35.761	5.79	12.865	66.16	0.19	27.010	35.695	44.001	0.154	1503.0	139.	107.96	1.337
160.	12.634	35.719	5.76	12.612	66.92	0.20	27.028	35.723	44.038	0.175	1502.5	159.	106.79	1.712
180.	12.341	35.680	5.59	12.317	67.51	0.13	27.056	35.763	44.090	0.196	1501.8	179.	104.59	2.152
200.	12.209	35.665	5.47	12.183	67.63	0.13	27.071	35.783	44.115	0.217	1501.6	198.	103.72	1.548
220.	12.020	35.644	5.47	11.991	67.69	0.17	27.091	35.811	44.150	0.238	1501.3	218.	102.30	1.819
240.	11.826	35.621	5.45	11.795	67.78	0.17	27.111	35.840	44.186	0.258	1500.9	238.	100.84	1.833
260.	11.701	35.607	5.45	11.667	67.97	0.12	27.124	35.858	44.209	0.278	1500.8	258.	100.10	1.467
280.	11.542	35.589	5.42	11.506	68.07	0.16	27.140	35.881	44.239	0.298	1500.6	278.	99.01	1.649
300.	11.473	35.583	5.43	11.435	68.06	0.10	27.149	35.892	44.253	0.318	1500.7	297.	98.69	1.194
350.	11.267	35.565	5.33	11.222	68.06	0.14	27.175	35.927	44.296	0.367	1500.8	347.	97.45	1.309
400.	11.098	35.553	5.30	11.048	68.09	0.18	27.198	35.957	44.333	0.415	1501.0	396.	96.45	1.241
450.	10.843	35.543	5.19	10.787	68.20	0.16	27.237	36.007	44.393	0.463	1500.9	446.	93.79	1.625
500.	10.738	35.555	5.12	10.676	68.28	0.16	27.266	36.041	44.431	0.509	1501.4	495.	92.19	1.384
550.	10.719	35.579	5.01	10.651	68.33	0.11	27.290	36.065	44.456	0.555	1502.2	545.	91.19	1.231
600.	10.743	35.636	4.83	10.668	68.36	0.14	27.331	36.105	44.494	0.600	1503.1	594.	88.65	1.596
650.	10.804	35.687	4.73	10.723	68.39	0.16	27.361	36.131	44.518	0.644	1504.2	644.	87.19	1.351
700.	10.901	35.763	4.62	10.812	68.38	0.14	27.404	36.170	44.552	0.687	1505.5	693.	84.52	1.626
750.	10.962	35.810	4.56	10.866	68.38	0.13	27.431	36.194	44.574	0.729	1506.6	743.	83.34	1.283
800.	11.008	35.861	4.50	10.905	68.37	0.13	27.464	36.224	44.602	0.770	1507.7	792.	81.66	1.410
850.	11.066	35.925	4.45	10.956	68.37	0.14	27.504	36.262	44.636	0.811	1508.8	842.	79.26	1.576
900.	10.839	35.929	4.40	10.725	68.46	0.17	27.549	36.317	44.700	0.849	1508.8	891.	75.91	1.765
950.	10.834	36.003	4.39	10.713	68.50	0.13	27.609	36.376	44.759	0.886	1509.7	940.	71.57	1.942
1000.	10.555	35.982	4.40	10.429	68.56	0.14	27.644	36.423	44.816	0.921	1509.5	990.	69.03	1.600
1100.	9.887	35.929	4.48	9.753	68.66	0.14	27.720	36.528	44.949	0.987	1508.7	1088.	62.84	1.702
1200.	9.046	35.804	4.64	8.907	68.71	0.17	27.763	36.609	45.066	1.048	1507.2	1187.	59.00	1.435
1300.	8.038	35.642	4.88	7.895	68.69	0.15	27.794	36.687	45.188	1.105	1504.9	1286.	55.40	1.383
1400.	7.159	35.494	5.11	7.014	68.68	0.18	27.806	36.742	45.283	1.160	1503.0	1384.	53.38	1.143
1500.	5.987	35.289	5.45	5.844	68.72	0.16	27.801	36.796	45.391	1.212	1499.8	1483.	51.46	1.095
1600.	4.925	35.132	5.85	4.784	68.69	0.18	27.805	36.854	45.501	1.262	1497.0	1581.	48.51	1.208
1700.	4.567	35.093	5.94	4.421	68.59	0.19	27.815	36.883	45.548	1.310	1497.2	1680.	47.30	0.903
1800.	4.180	35.041	6.07	4.029	68.61	0.18	27.816	36.904	45.589	1.357	1497.2	1778.	46.64	0.775
1900.	4.076	35.046	6.04	3.917	68.55	0.14	27.831	36.926	45.615	1.403	1498.5	1877.	45.76	0.809
2000.	3.889	35.029	6.03	3.723	68.54	0.13	27.838	36.943	45.642	1.449	1499.3	1975.	45.22	0.727
2100.	3.661	35.011	6.04	3.489	68.52	0.13	27.847	36.964	45.675	1.494	1500.0	2073.	44.15	0.832
2200.	3.576	35.003	6.01	3.395	68.50	0.13	27.850	36.972	45.688	1.538	1501.4	2171.	44.30	0.515
2300.	3.466	34.996	5.94	3.277	68.49	0.13	27.856	36.984	45.706	1.582	1502.6	2269.	44.00	0.640
2400.	3.358	34.990	5.86	3.162	68.21	0.16	27.862	36.997	45.724	1.626	1503.8	2368.	43.63	0.652

Sample data

2442.	3.305	34.988	5.92	3.105
1994.	3.898	35.028	5.99	3.732
995.	10.566	35.982	4.36	10.441
492.	10.751	35.550	5.01	10.690
10.	13.740	35.854	6.41	13.739

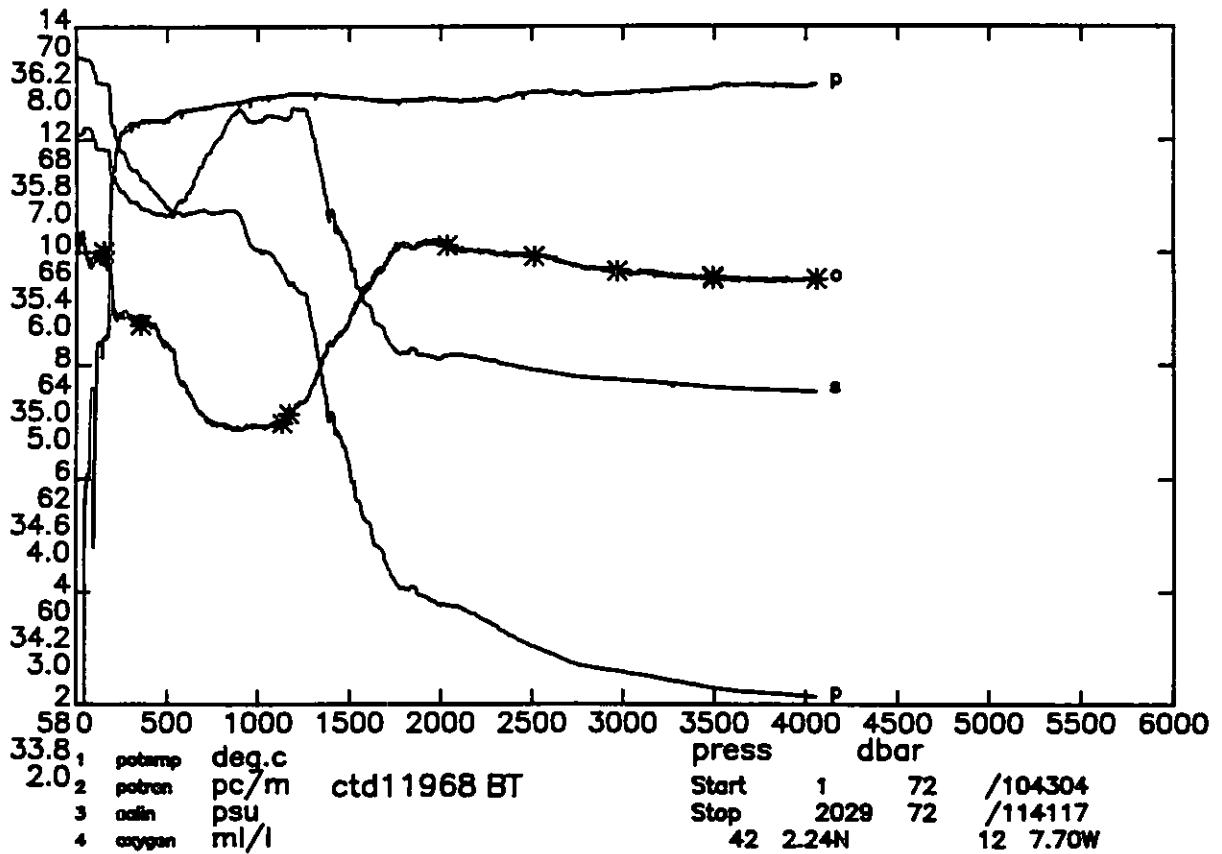
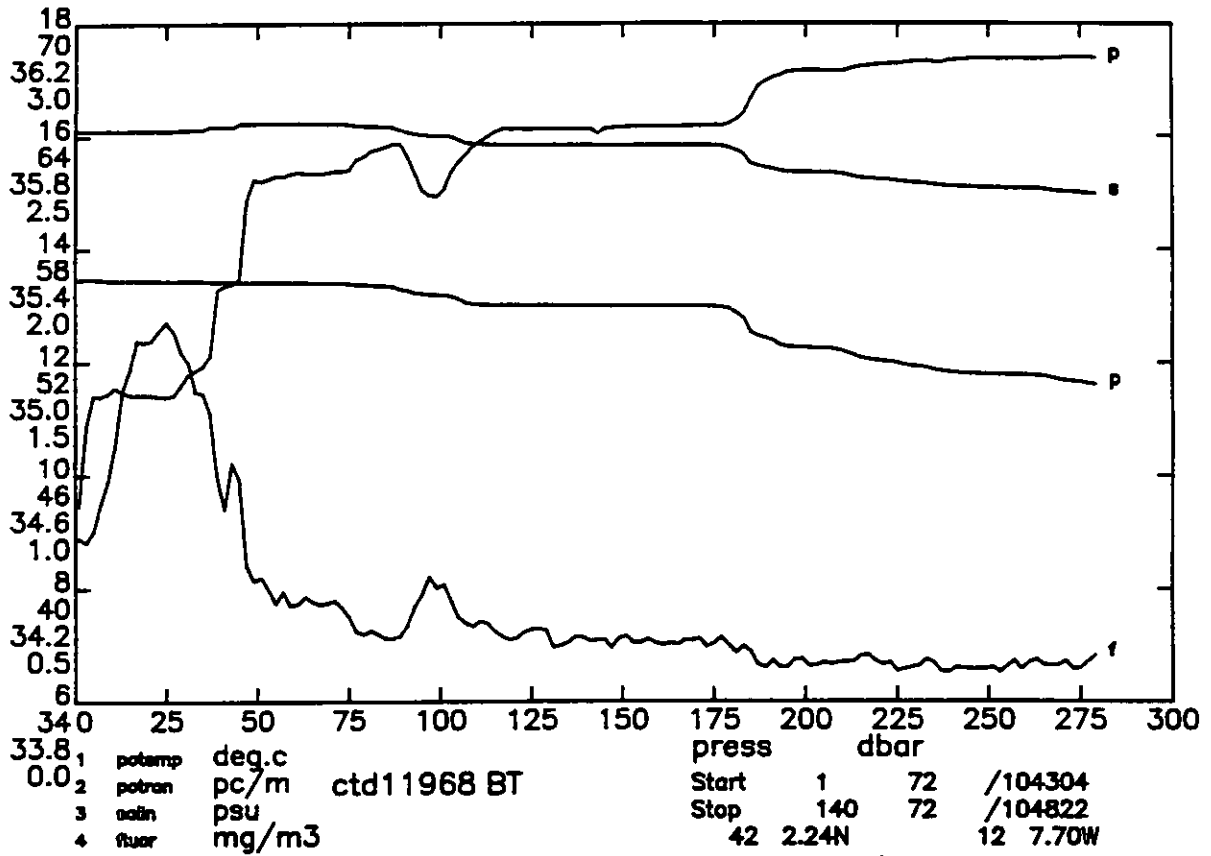


DISCOVERY CRUISE 189 STATION 11968

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	%/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	13.461	35.820	6.03	13.460	50.50	1.05	26.934	35.596	43.880	0.011	1502.9	10.	111.30	-9.999
20.	13.460	35.820	6.12	13.458	50.29	1.59	26.934	35.596	43.880	0.022	1503.0	20.	111.61	0.074
30.	13.457	35.822	6.18	13.453	51.06	1.53	26.938	35.599	43.883	0.033	1503.2	30.	111.62	0.992
40.	13.443	35.833	6.14	13.437	55.96	0.92	26.949	35.611	43.896	0.045	1503.3	40.	110.82	1.914
50.	13.439	35.846	6.01	13.432	61.63	0.54	26.960	35.622	43.907	0.056	1503.5	50.	110.11	1.841
60.	13.435	35.845	5.94	13.427	62.05	0.43	26.961	35.623	43.908	0.067	1503.6	60.	110.35	0.486
70.	13.425	35.843	5.93	13.415	62.09	0.44	26.961	35.624	43.909	0.078	1503.8	69.	110.60	0.424
80.	13.389	35.835	5.90	13.378	63.06	0.31	26.963	35.627	43.914	0.089	1503.8	79.	110.77	0.690
90.	13.304	35.817	5.90	13.291	63.26	0.31	26.967	35.634	43.924	0.100	1503.7	89.	110.69	1.123
100.	13.217	35.800	6.00	13.203	60.98	0.51	26.972	35.643	43.936	0.111	1503.5	99.	110.48	1.313
120.	13.035	35.768	5.99	13.018	64.40	0.28	26.984	35.663	43.963	0.133	1503.2	119.	109.85	1.434
140.	13.026	35.766	5.98	13.006	64.37	0.28	26.986	35.665	43.966	0.155	1503.5	139.	110.31	0.459
160.	13.014	35.764	5.92	12.992	64.47	0.25	26.987	35.667	43.968	0.177	1503.8	159.	110.80	0.422
180.	12.934	35.752	5.92	12.909	64.76	0.23	26.994	35.677	43.981	0.199	1503.8	179.	110.69	1.083
200.	12.279	35.669	5.55	12.252	67.50	0.17	27.060	35.770	44.099	0.221	1501.9	198.	104.74	3.302
220.	12.051	35.643	5.43	12.022	67.80	0.17	27.085	35.804	44.142	0.241	1501.4	218.	102.91	1.997
240.	11.857	35.619	5.46	11.826	68.06	0.14	27.103	35.830	44.176	0.262	1501.0	238.	101.60	1.764
260.	11.815	35.614	5.45	11.781	68.14	0.16	27.108	35.837	44.184	0.282	1501.2	258.	101.69	0.872
280.	11.639	35.593	5.44	11.603	68.19	0.21	27.126	35.862	44.216	0.302	1500.9	278.	100.46	1.723
300.	11.528	35.579	5.43	11.489	68.30	0.16	27.136	35.877	44.236	0.322	1500.9	297.	99.92	1.342
350.	11.388	35.562	5.43	11.343	68.32	0.17	27.150	35.897	44.261	0.372	1501.2	347.	99.89	0.954
400.	11.224	35.549	5.37	11.173	68.32	0.16	27.171	35.926	44.297	0.422	1501.4	396.	99.05	1.202
450.	11.049	35.538	5.29	10.992	68.34	0.13	27.196	35.958	44.336	0.471	1501.6	446.	97.85	1.290
500.	10.857	35.531	5.19	10.794	68.37	0.16	27.227	35.996	44.382	0.520	1501.8	495.	96.06	1.433
550.	10.782	35.567	4.96	10.713	68.49	0.14	27.269	36.042	44.430	0.567	1502.4	545.	93.25	1.652
600.	10.732	35.590	4.83	10.657	68.52	0.16	27.298	36.072	44.463	0.614	1503.0	594.	91.76	1.357
650.	10.793	35.660	4.65	10.712	68.54	0.15	27.342	36.113	44.501	0.659	1504.2	644.	88.93	1.655
700.	10.839	35.725	4.57	10.751	68.55	0.16	27.386	36.155	44.540	0.703	1505.2	693.	86.15	1.647
750.	10.780	35.774	4.47	10.685	68.60	0.14	27.436	36.207	44.594	0.745	1505.9	743.	82.61	1.797
800.	10.813	35.818	4.48	10.712	68.62	0.15	27.465	36.235	44.620	0.786	1506.9	792.	81.19	1.342
850.	10.856	35.883	4.46	10.748	68.65	0.13	27.509	36.276	44.659	0.826	1508.0	842.	78.41	1.649
900.	10.745	35.902	4.43	10.631	68.66	0.16	27.546	36.317	44.704	0.864	1508.4	891.	76.08	1.556
950.	10.286	35.865	4.46	10.169	68.70	0.21	27.598	36.389	44.795	0.901	1507.6	940.	71.50	1.978
1000.	10.162	35.866	4.46	10.039	68.73	0.16	27.622	36.419	44.829	0.937	1508.0	990.	70.23	1.290
1200.	9.527	35.911	4.63	9.384	68.81	0.17	27.768	36.592	45.028	1.070	1509.1	1187.	59.75	1.598
1400.	7.317	35.550	5.18	7.170	68.77	0.15	27.829	36.756	45.289	1.182	1503.7	1384.	51.83	1.423
1600.	5.386	35.215	5.68	5.240	68.71	0.15	27.817	36.842	45.467	1.283	1499.0	1581.	49.15	0.992
1800.	4.205	35.045	6.07	4.053	68.70	0.14	27.817	36.904	45.587	1.378	1497.3	1778.	46.67	0.911
2000.	3.930	35.025	6.09	3.764	68.71	0.17	27.831	36.933	45.631	1.471	1499.5	1975.	46.06	0.674
2200.	3.747	35.027	6.01	3.563	68.69	0.11	27.853	36.965	45.673	1.562	1502.1	2171.	45.00	0.717
2400.	3.390	34.997	5.97	3.193	68.78	0.11	27.865	36.998	45.723	1.651	1503.9	2368.	43.58	0.744
2600.	3.107	34.973	5.95	2.895	68.85	0.10	27.874	37.023	45.764	1.737	1506.1	2564.	42.60	0.674
2700.	2.975	34.963	5.89	2.756	68.79	0.13	27.878	37.035	45.783	1.779	1507.2	2662.	42.07	0.675
2800.	2.905	34.956	5.85	2.677	68.79	0.10	27.879	37.040	45.793	1.821	1508.6	2760.	42.15	0.485
2900.	2.852	34.950	5.85	2.615	68.79	0.12	27.880	37.045	45.800	1.863	1510.1	2858.	42.40	0.417
3000.	2.822	34.947	5.83	2.575	68.82	0.11	27.881	37.048	45.805	1.906	1511.6	2955.	42.77	0.360
3100.	2.781	34.943	5.83	2.525	68.84	0.10	27.882	37.051	45.812	1.949	1513.2	3053.	43.03	0.407
3200.	2.729	34.937	5.79	2.463	68.86	0.13	27.883	37.056	45.819	1.992	1514.6	3151.	43.19	0.440
3300.	2.683	34.932	5.78	2.408	68.89	0.09	27.884	37.059	45.826	2.035	1516.1	3249.	43.40	0.421
3400.	2.643	34.927	5.77	2.357	68.90	0.10	27.884	37.063	45.831	2.079	1517.7	3346.	43.66	0.393
3500.	2.586	34.921	5.76	2.291	68.92	0.11	27.885	37.067	45.839	2.123	1519.1	3444.	43.71	0.471
3600.	2.558	34.917	5.76	2.253	68.97	0.10	27.885	37.069	45.844	2.166	1520.7	3542.	44.05	0.349
3700.	2.538	34.914	5.76	2.222	68.95	0.14	27.885	37.071	45.847	2.211	1522.3	3639.	44.48	0.299
3800.	2.525	34.912	5.75	2.199	68.96	0.08	27.885	37.072	45.849	2.255	1524.0	3737.	44.94	0.277
3900.	2.515	34.909	5.75	2.178	68.93	0.12	27.885	37.073	45.852	2.301	1525.7	3834.	45.41	0.266
4000.	2.500	34.906	5.76	2.152	68.93	0.06	27.884	37.075	45.854	2.346	1527.3	3932.	45.86	0.285

Sample data

4058.	2.496	34.906	5.76	2.141
3492.	2.590	34.922	5.76	2.296
2969.	2.834	34.948	5.83	2.590
2511.	3.223	34.982	5.96	3.017
2035.	3.920	35.022	6.06	3.750
1130.	9.805	35.874	4.49	9.668
353.	11.355	35.556	5.36	11.310
150.	13.016	35.759	6.00	12.995

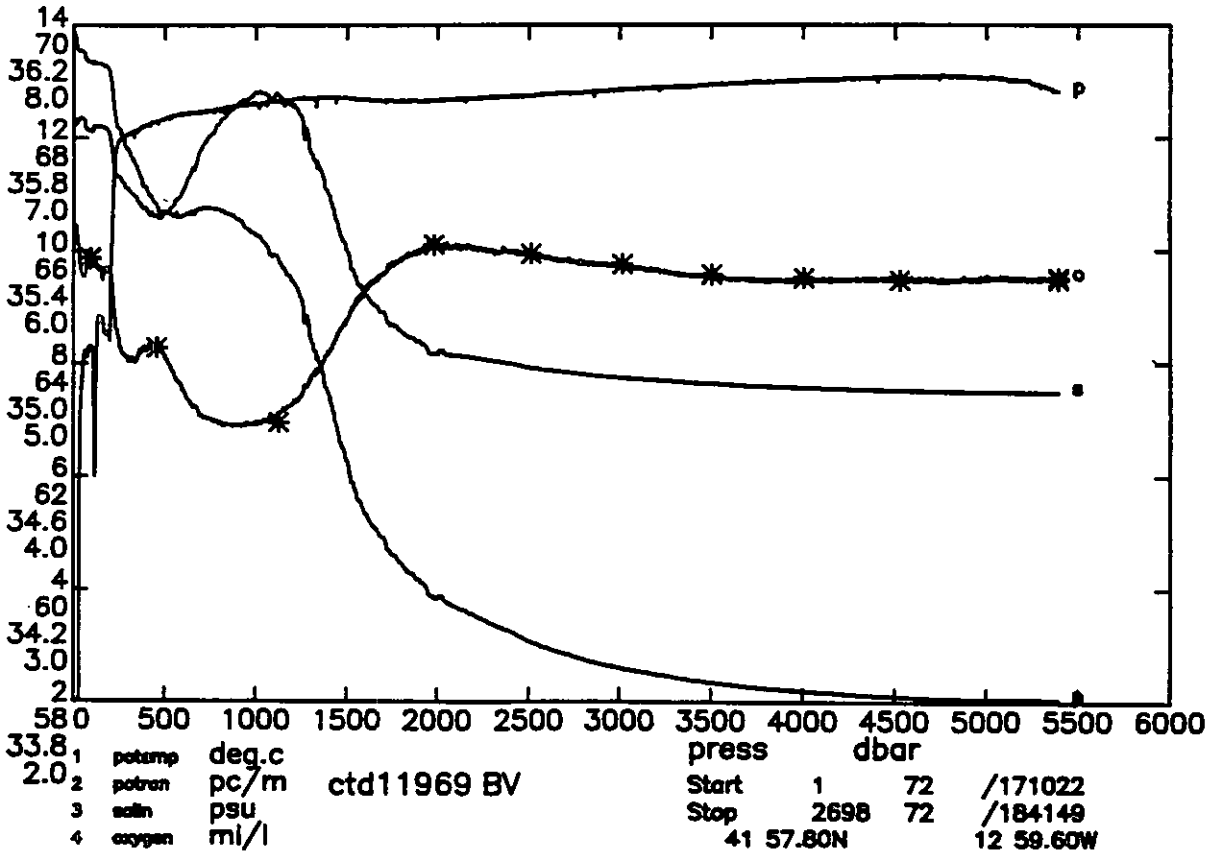
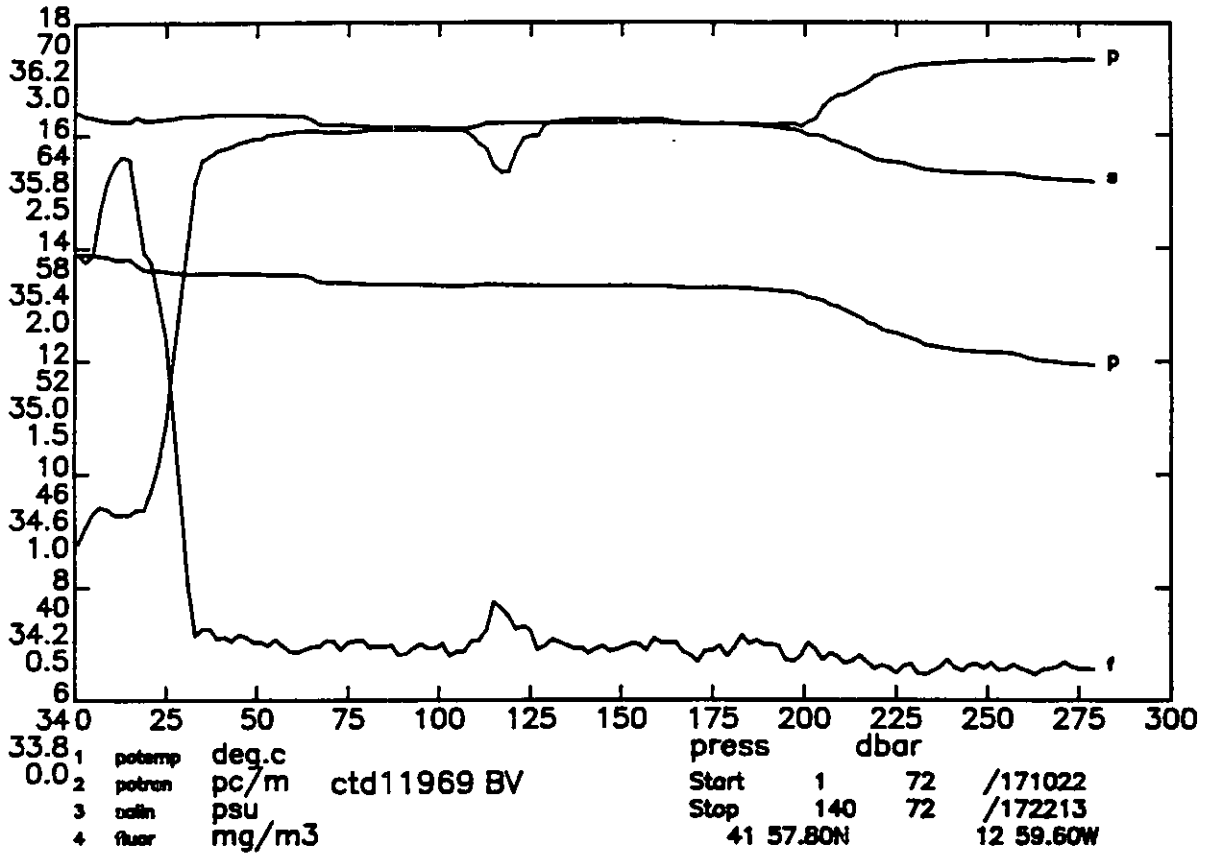


DISCOVERY CRUISE 189 STATION 11969

pres db	temp degc90	salin	oxygen ml/l	potemp degc90	potran %/m	fluor mg/m ³	sigma0 kg/m ³	sigma2 kg/m ³	sigma4 kg/m ³	dynht dyn.m	sndv m/s	depth m	svanom 10 ⁻⁸ m ³ /kg	bvfr cy/hr
10.	13.827	35.850	6.12	13.825	43.98	2.33	26.881	35.528	43.799	0.012	1504.1	10.	116.38	-9.999
20.	13.617	35.852	6.17	13.614	44.63	1.96	26.927	35.582	43.860	0.023	1503.6	20.	112.32	3.816
30.	13.557	35.866	6.05	13.553	56.77	0.71	26.951	35.608	43.888	0.034	1503.6	30.	110.39	2.735
40.	13.564	35.873	5.87	13.558	63.21	0.28	26.955	35.612	43.892	0.045	1503.7	40.	110.28	1.187
50.	13.554	35.871	5.85	13.547	63.78	0.26	26.956	35.613	43.894	0.056	1503.9	50.	110.49	0.564
60.	13.535	35.867	5.79	13.527	64.17	0.21	26.957	35.615	43.896	0.067	1504.0	60.	110.75	0.410
70.	13.403	35.835	5.83	13.393	64.13	0.26	26.960	35.623	43.909	0.078	1503.7	69.	110.76	0.988
80.	13.376	35.828	5.89	13.364	64.24	0.25	26.960	35.625	43.912	0.090	1503.7	79.	111.01	0.429
90.	13.373	35.827	5.89	13.361	64.28	0.20	26.961	35.625	43.913	0.101	1503.9	89.	111.26	0.421
100.	13.347	35.821	5.89	13.333	64.25	0.24	26.961	35.627	43.916	0.112	1504.0	99.	111.49	0.531
120.	13.354	35.843	5.90	13.337	62.59	0.34	26.977	35.643	43.931	0.134	1504.3	119.	110.59	1.581
140.	13.341	35.842	5.84	13.322	64.84	0.22	26.980	35.646	43.934	0.156	1504.6	139.	110.97	0.618
160.	13.339	35.842	5.74	13.317	64.79	0.26	26.981	35.648	43.936	0.178	1505.0	159.	111.44	0.490
180.	13.306	35.836	5.85	13.281	64.53	0.22	26.984	35.651	43.942	0.201	1505.2	179.	111.81	0.633
200.	13.165	35.803	5.84	13.137	64.54	0.23	26.988	35.661	43.957	0.223	1505.0	198.	111.95	0.871
220.	12.616	35.709	5.52	12.586	67.19	0.15	27.025	35.722	44.038	0.245	1503.4	218.	108.76	2.514
240.	12.242	35.666	5.27	12.210	67.86	0.16	27.066	35.777	44.108	0.267	1502.4	238.	105.33	2.584
260.	12.118	35.653	5.14	12.083	67.98	0.14	27.081	35.797	44.133	0.288	1502.3	258.	104.42	1.568
280.	11.943	35.632	5.07	11.906	68.02	0.13	27.099	35.822	44.165	0.308	1502.0	278.	103.19	1.723
300.	11.835	35.620	5.03	11.796	68.06	0.12	27.110	35.838	44.185	0.329	1502.0	297.	102.62	1.371
350.	11.470	35.578	5.03	11.425	68.13	0.14	27.147	35.891	44.252	0.379	1501.5	347.	100.20	1.587
400.	11.137	35.547	5.12	11.086	68.21	0.13	27.186	35.944	44.318	0.429	1501.1	396.	97.59	1.621
450.	10.886	35.523	5.15	10.830	68.29	0.15	27.214	35.983	44.367	0.477	1501.0	446.	95.99	1.389
500.	10.742	35.534	5.05	10.680	68.35	0.14	27.249	36.024	44.414	0.525	1501.4	495.	93.79	1.522
550.	10.680	35.563	4.89	10.612	68.40	0.13	27.284	36.061	44.453	0.571	1502.0	545.	91.72	1.492
600.	10.680	35.613	4.76	10.606	68.43	0.16	27.324	36.101	44.493	0.616	1502.9	594.	89.20	1.589
650.	10.775	35.690	4.63	10.694	68.45	0.12	27.369	36.141	44.528	0.660	1504.2	644.	86.37	1.657
700.	10.821	35.761	4.54	10.733	68.46	0.12	27.417	36.186	44.571	0.703	1505.2	693.	83.19	1.726
750.	10.851	35.810	4.51	10.756	68.48	0.15	27.451	36.219	44.602	0.744	1506.2	743.	81.32	1.452
800.	10.830	35.855	4.48	10.729	68.49	0.14	27.491	36.259	44.643	0.784	1507.0	792.	78.82	1.593
850.	10.756	35.891	4.46	10.648	68.56	0.12	27.534	36.305	44.691	0.823	1507.6	842.	75.94	1.668
900.	10.670	35.920	4.45	10.557	68.56	0.15	27.572	36.347	44.736	0.860	1508.2	891.	73.44	1.590
950.	10.512	35.935	4.46	10.393	68.59	0.12	27.613	36.394	44.790	0.896	1508.5	940.	70.55	1.670
1000.	10.402	35.960	4.48	10.277	68.60	0.13	27.654	36.439	44.839	0.931	1509.0	990.	67.78	1.642
1200.	9.604	35.913	4.65	9.460	68.67	0.16	27.757	36.578	45.011	1.060	1509.4	1187.	60.97	1.395
1400.	7.612	35.598	5.10	7.462	68.71	0.16	27.824	36.737	45.258	1.173	1504.9	1384.	53.19	1.419
1600.	5.481	35.244	5.65	5.333	68.67	0.16	27.829	36.849	45.469	1.274	1499.4	1581.	48.43	1.163
1800.	4.597	35.113	5.93	4.440	68.66	0.16	27.829	36.895	45.559	1.369	1499.0	1778.	47.29	0.789
2000.	3.994	35.032	6.04	3.827	68.66	0.14	27.830	36.929	45.623	1.463	1499.8	1975.	46.48	0.712
2200.	3.712	35.018	6.02	3.529	68.70	0.13	27.849	36.963	45.672	1.555	1501.9	2171.	45.17	0.746
2400.	3.434	34.997	5.98	3.236	68.74	0.12	27.861	36.991	45.715	1.644	1504.1	2368.	44.22	0.689
2600.	3.162	34.975	5.94	2.948	68.76	0.11	27.870	37.016	45.755	1.731	1506.3	2564.	43.25	0.676
2800.	2.983	34.961	5.88	2.753	68.80	0.13	27.877	37.033	45.782	1.817	1508.9	2760.	42.94	0.571
3000.	2.848	34.948	5.86	2.600	68.86	0.08	27.880	37.045	45.801	1.903	1511.7	2955.	43.05	0.494
3200.	2.759	34.940	5.84	2.493	68.88	0.09	27.883	37.054	45.816	1.989	1514.8	3151.	43.45	0.430
3400.	2.670	34.932	5.78	2.384	68.92	0.12	27.885	37.062	45.830	2.076	1517.8	3346.	43.77	0.439
3600.	2.614	34.925	5.75	2.307	68.97	0.09	27.886	37.068	45.839	2.165	1521.0	3542.	44.42	0.363
3800.	2.571	34.918	5.74	2.243	68.99	0.08	27.887	37.072	45.846	2.254	1524.2	3737.	45.18	0.329
3900.	2.562	34.917	5.74	2.224	69.00	0.11	27.887	37.073	45.849	2.300	1525.9	3834.	45.66	0.275
4000.	2.548	34.914	5.74	2.198	69.02	0.06	27.887	37.074	45.852	2.346	1527.5	3932.	46.10	0.294
4100.	2.536	34.912	5.74	2.175	69.02	0.07	27.887	37.076	45.854	2.392	1529.2	4029.	46.54	0.293
4200.	2.528	34.910	5.74	2.155	69.04	0.09	27.887	37.077	45.856	2.439	1530.9	4126.	47.03	0.261
4300.	2.516	34.908	5.74	2.132	69.05	0.08	27.887	37.079	45.859	2.486	1532.6	4224.	47.44	0.310
4400.	2.511	34.906	5.75	2.115	69.07	0.07	27.887	37.080	45.861	2.534	1534.3	4321.	47.94	0.247
4500.	2.507	34.905	5.73	2.100	69.08	0.06	27.887	37.080	45.863	2.582	1536.0	4418.	48.45	0.247
4600.	2.507	34.903	5.74	2.087	69.08	0.16	27.887	37.081	45.864	2.630	1537.7	4515.	49.00	0.218
4700.	2.507	34.902	5.75	2.075	69.07	0.21	27.887	37.081	45.865	2.680	1539.5	4612.	49.58	0.191
4800.	2.512	34.900	5.73	2.068	69.09	0.21	27.886	37.081	45.865	2.730	1541.2	4709.	50.24	0.108
4900.	2.519	34.899	5.75	2.061	69.07	0.25	27.886	37.081	45.866	2.780	1543.0	4806.	50.89	0.123
5000.	2.527	34.900	5.75	2.057	69.04	0.20	27.887	37.082	45.867	2.831	1544.8	4903.	51.46	0.202
5100.	2.536	34.899	5.75	2.053	69.05	0.23	27.887	37.082	45.867	2.883	1546.5	5000.	52.12	0.117
5200.	2.547	34.899	5.75	2.050	69.01	0.24	27.886	37.082	45.867	2.936	1548.3	5097.	52.79	0.093
5300.	2.557	34.898	5.75	2.047	68.92	0.22	27.886	37.082	45.867	2.989	1550.1	5194.	53.49	0.062

Sample data

5394.	2.568	34.898	5.74	2.045
4527.	2.507	34.902	5.74	2.096
4004.	2.546	34.914	5.76	2.195
3503.	2.640	34.928	5.79	2.344
3015.	2.837	34.948	5.88	2.588
2510.	3.253	34.984	5.97	3.047
1979.	4.007	35.036	6.05	3.841
1125.	9.964	35.954	4.48	9.826
456.	10.852	35.519	5.14	10.796
94.	13.367	35.824	5.94	13.354

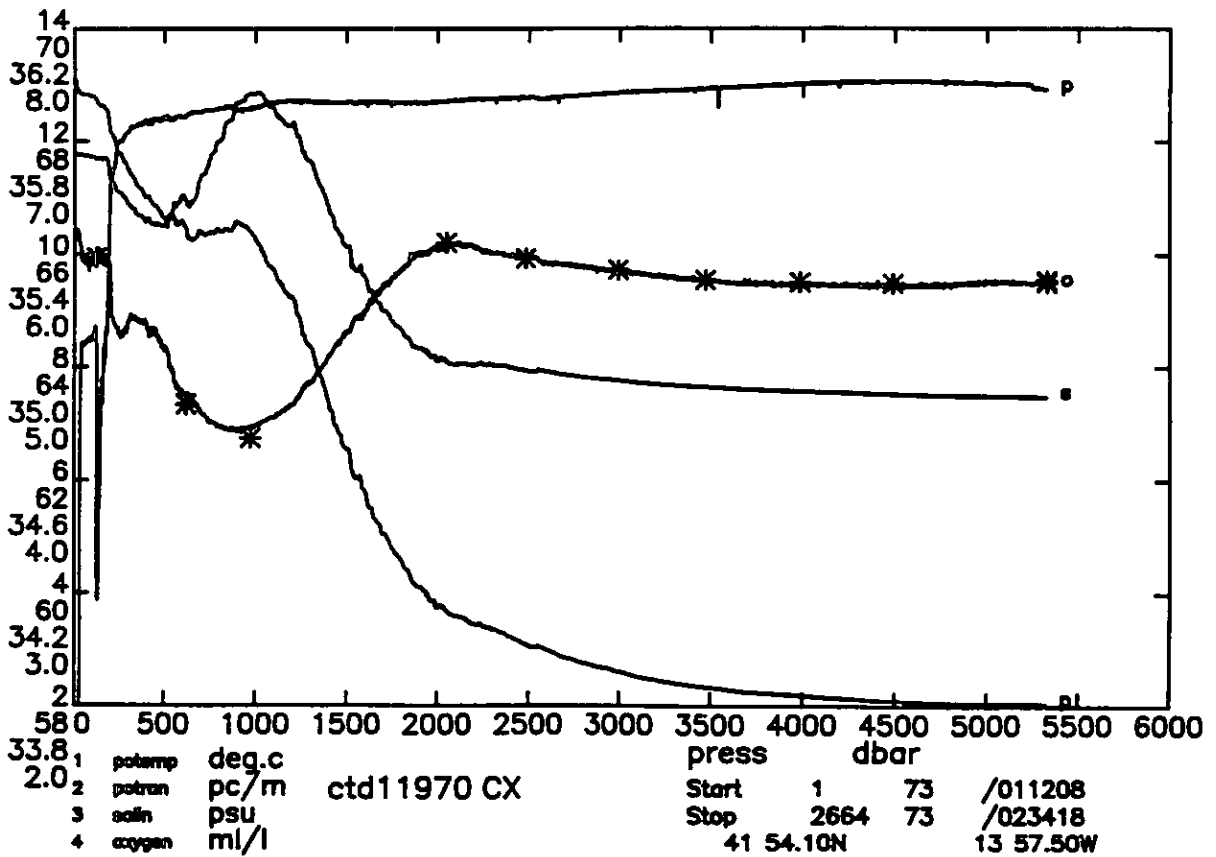
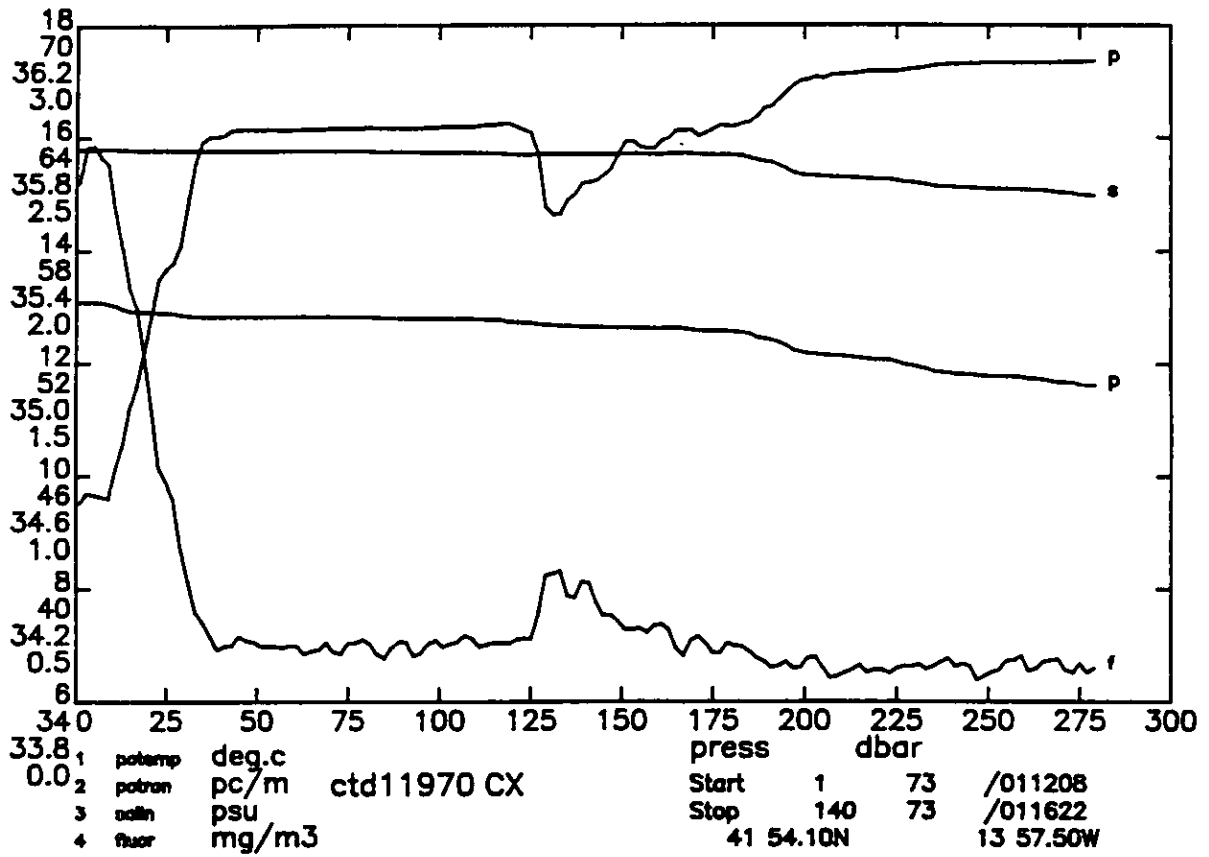




DISCOVERY CRUISE 189 STATION 11970



pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	13.039	35.758	6.16	13.038	45.59	2.27	26.973	35.651	43.950	0.011	1501.4	10.	107.68	-9.999
20.	12.921	35.753	6.22	12.918	53.59	1.42	26.993	35.676	43.980	0.021	1501.2	20.	106.05	2.535
30.	12.867	35.752	6.11	12.863	59.36	0.60	27.003	35.688	43.994	0.032	1501.1	30.	105.39	1.791
40.	12.846	35.752	6.00	12.840	64.06	0.24	27.008	35.694	44.001	0.043	1501.2	40.	105.18	1.300
50.	12.843	35.751	5.96	12.836	64.43	0.26	27.008	35.694	44.001	0.053	1501.4	50.	105.49	-0.219
60.	12.840	35.750	5.94	12.832	64.40	0.25	27.008	35.694	44.002	0.064	1501.5	60.	105.77	0.240
70.	12.838	35.749	5.92	12.829	64.46	0.24	27.008	35.695	44.002	0.074	1501.7	69.	106.06	0.132
80.	12.836	35.749	5.87	12.825	64.50	0.27	27.009	35.696	44.003	0.085	1501.9	79.	106.27	0.511
90.	12.818	35.746	5.92	12.806	64.48	0.26	27.010	35.698	44.006	0.096	1502.0	89.	106.44	0.652
100.	12.811	35.745	5.94	12.798	64.54	0.26	27.011	35.698	44.007	0.106	1502.1	99.	106.69	0.403
120.	12.751	35.737	5.89	12.735	64.63	0.27	27.018	35.708	44.019	0.128	1502.2	119.	106.62	1.046
140.	12.670	35.738	6.03	12.651	61.56	0.53	27.035	35.728	44.042	0.149	1502.3	139.	105.58	1.645
160.	12.634	35.737	5.98	12.612	63.60	0.34	27.042	35.737	44.052	0.170	1502.5	159.	105.46	1.086
180.	12.584	35.736	5.98	12.559	64.58	0.25	27.051	35.748	44.065	0.191	1502.7	179.	105.15	1.218
200.	12.209	35.665	5.85	12.182	67.06	0.17	27.071	35.783	44.115	0.212	1501.6	198.	103.73	1.821
220.	12.087	35.649	5.39	12.058	67.53	0.14	27.082	35.800	44.136	0.232	1501.5	218.	103.16	1.379
240.	11.855	35.623	5.35	11.824	67.92	0.18	27.107	35.834	44.179	0.253	1501.0	238.	101.29	2.008
260.	11.789	35.614	5.27	11.755	68.00	0.17	27.113	35.843	44.191	0.273	1501.1	258.	101.19	1.042
280.	11.660	35.597	5.32	11.624	68.11	0.15	27.125	35.860	44.214	0.293	1501.0	278.	100.54	1.416
300.	11.531	35.576	5.40	11.493	68.16	0.17	27.133	35.874	44.233	0.313	1500.9	297.	100.24	1.181
350.	11.268	35.542	5.41	11.223	68.27	0.18	27.157	35.909	44.278	0.363	1500.7	347.	99.14	1.274
400.	11.071	35.521	5.39	11.021	68.36	0.18	27.177	35.938	44.315	0.413	1500.9	396.	98.34	1.183
450.	10.909	35.508	5.34	10.853	68.39	0.12	27.198	35.966	44.350	0.462	1501.1	446.	97.53	1.184
500.	10.691	35.499	5.15	10.629	68.39	0.15	27.231	36.009	44.401	0.510	1501.1	495.	95.43	1.500
550.	10.743	35.573	4.89	10.675	68.39	0.17	27.281	36.055	44.445	0.557	1502.2	545.	92.11	1.751
600.	10.645	35.610	4.78	10.571	68.44	0.13	27.328	36.106	44.500	0.602	1502.8	594.	88.76	1.757
650.	10.315	35.582	4.70	10.236	68.50	0.16	27.365	36.158	44.564	0.646	1502.4	644.	86.08	1.619
700.	10.490	35.675	4.61	10.404	68.51	0.14	27.409	36.193	44.592	0.688	1504.0	693.	83.48	1.601
750.	10.467	35.735	4.50	10.375	68.55	0.12	27.461	36.245	44.644	0.729	1504.8	743.	79.82	1.812
800.	10.518	35.799	4.47	10.418	60.58	0.15	27.503	36.285	44.682	0.768	1505.9	792.	77.15	1.620
850.	10.529	35.871	4.45	10.423	68.60	0.11	27.558	36.339	44.734	0.806	1506.8	842.	73.25	1.857
900.	10.683	35.936	4.44	10.569	68.54	0.17	27.583	36.356	44.745	0.843	1508.3	891.	72.51	1.157
950.	10.609	35.960	4.45	10.490	68.57	0.14	27.616	36.392	44.784	0.878	1508.9	940.	70.50	1.483
1000.	10.372	35.970	4.49	10.247	68.60	0.14	27.667	36.453	44.854	0.913	1508.9	990.	66.50	1.878
1200.	9.378	35.859	4.66	9.235	68.71	0.18	27.752	36.583	45.026	1.039	1508.5	1187.	60.86	1.319
1400.	7.547	35.567	5.10	7.397	68.69	0.15	27.809	36.726	45.249	1.153	1504.6	1384.	54.39	1.335
1600.	5.967	35.320	5.49	5.813	68.67	0.18	27.830	36.825	45.422	1.258	1501.5	1581.	50.22	1.126
1800.	4.744	35.134	5.87	4.585	68.69	0.13	27.829	36.888	45.544	1.356	1499.6	1778.	47.92	0.918
2000.	3.913	35.021	6.07	3.746	68.70	0.14	27.829	36.933	45.631	1.450	1499.4	1975.	46.13	0.822
2200.	3.626	35.006	6.06	3.445	68.73	0.13	27.848	36.967	45.680	1.541	1501.6	2171.	44.80	0.744
2400.	3.412	34.997	5.98	3.214	68.75	0.14	27.863	36.994	45.719	1.630	1504.0	2368.	43.90	0.679
2600.	3.205	34.984	5.91	2.991	68.76	0.14	27.873	37.017	45.753	1.717	1506.5	2564.	43.26	0.634
2800.	2.982	34.963	5.88	2.752	68.81	0.11	27.878	37.035	45.783	1.803	1508.9	2760.	42.81	0.595
3000.	2.847	34.951	5.85	2.600	68.86	0.10	27.882	37.047	45.803	1.889	1511.7	2955.	42.88	0.500
3200.	2.735	34.939	5.81	2.470	68.89	0.05	27.884	37.056	45.819	1.975	1514.7	3151.	43.15	0.456
3400.	2.650	34.931	5.79	2.365	68.93	0.07	27.886	37.064	45.833	2.061	1517.7	3346.	43.51	0.428
3600.	2.595	34.924	5.75	2.289	68.96	0.05	27.887	37.070	45.842	2.149	1520.9	3542.	44.16	0.360
3800.	2.556	34.918	5.74	2.229	68.99	0.11	27.888	37.073	45.849	2.238	1524.1	3737.	44.96	0.320
3900.	2.548	34.915	5.74	2.210	68.99	0.09	27.887	37.074	45.850	2.283	1525.8	3834.	45.53	0.199
4000.	2.538	34.914	5.72	2.188	68.90	0.09	27.887	37.075	45.853	2.329	1527.5	3932.	45.97	0.291
4100.	2.525	34.910	5.74	2.164	69.03	0.06	27.886	37.076	45.855	2.375	1529.2	4029.	46.48	0.248
4200.	2.516	34.908	5.72	2.144	69.04	0.06	27.887	37.077	45.857	2.422	1530.9	4126.	46.95	0.277
4300.	2.510	34.907	5.72	2.127	69.03	0.06	27.887	37.078	45.859	2.469	1532.6	4224.	47.42	0.270
4400.	2.497	34.904	5.72	2.102	69.05	0.05	27.886	37.079	45.862	2.517	1534.2	4321.	47.89	0.272
4500.	2.499	34.903	5.72	2.092	69.06	0.06	27.886	37.080	45.863	2.565	1536.0	4418.	48.46	0.201
4600.	2.496	34.901	5.73	2.077	69.05	0.05	27.886	37.080	45.864	2.614	1537.7	4515.	49.02	0.205
4700.	2.499	34.900	5.72	2.068	69.05	0.05	27.886	37.081	45.865	2.663	1539.4	4612.	49.59	0.200
4800.	2.504	34.898	5.74	2.060	69.04	0.21	27.885	37.081	45.865	2.713	1541.2	4709.	50.23	0.127
4900.	2.512	34.897	5.76	2.055	69.02	0.05	27.885	37.080	45.865	2.763	1542.9	4806.	50.92	-0.042
5000.	2.524	34.897	5.76	2.054	69.01	0.07	27.885	37.081	45.866	2.815	1544.7	4903.	51.57	0.117
5100.	2.534	34.897	5.75	2.051	69.02	0.19	27.885	37.081	45.866	2.866	1546.5	5000.	52.23	0.118
5200.	2.545	34.896	5.75	2.048	69.00	0.24	27.885	37.081	45.866	2.919	1548.3	5097.	52.94	-0.060
5300.	2.556	34.895	5.74	2.046	68.93	0.21	27.884	37.080	45.865	2.972	1550.1	5194.	53.67	-0.097



Sample data



5327.	2.559	34.898	5.77	2.045
4487.	2.499	34.902	5.74	2.094
3981.	2.540	34.912	5.75	2.193
3466.	2.631	34.927	5.77	2.339
2991.	2.853	34.950	5.86	2.606
2478.	3.283	34.986	5.96	3.080
2046.	3.866	35.018	6.10	3.696
971.	10.524	35.967	4.37	10.402
617.	10.536	35.595	4.67	10.460
120.	12.750	35.734	5.97	12.733

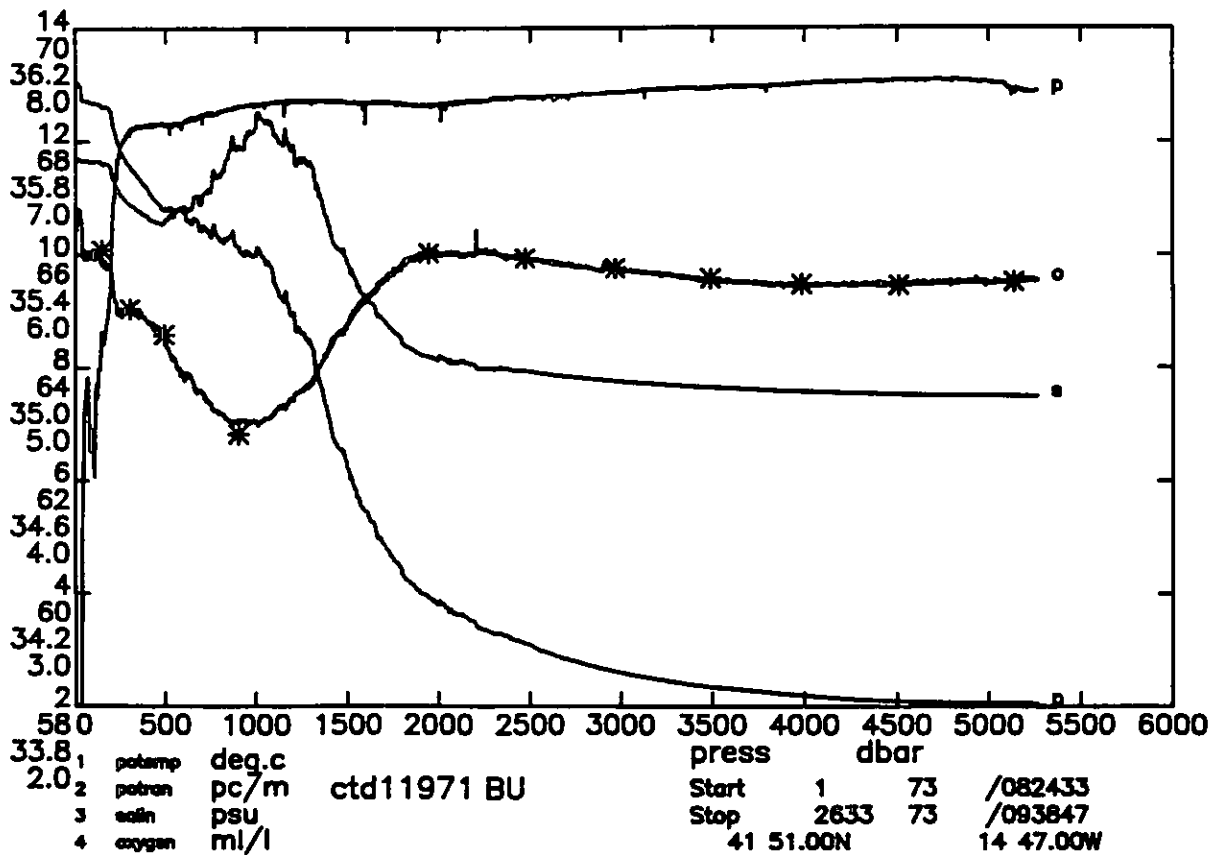
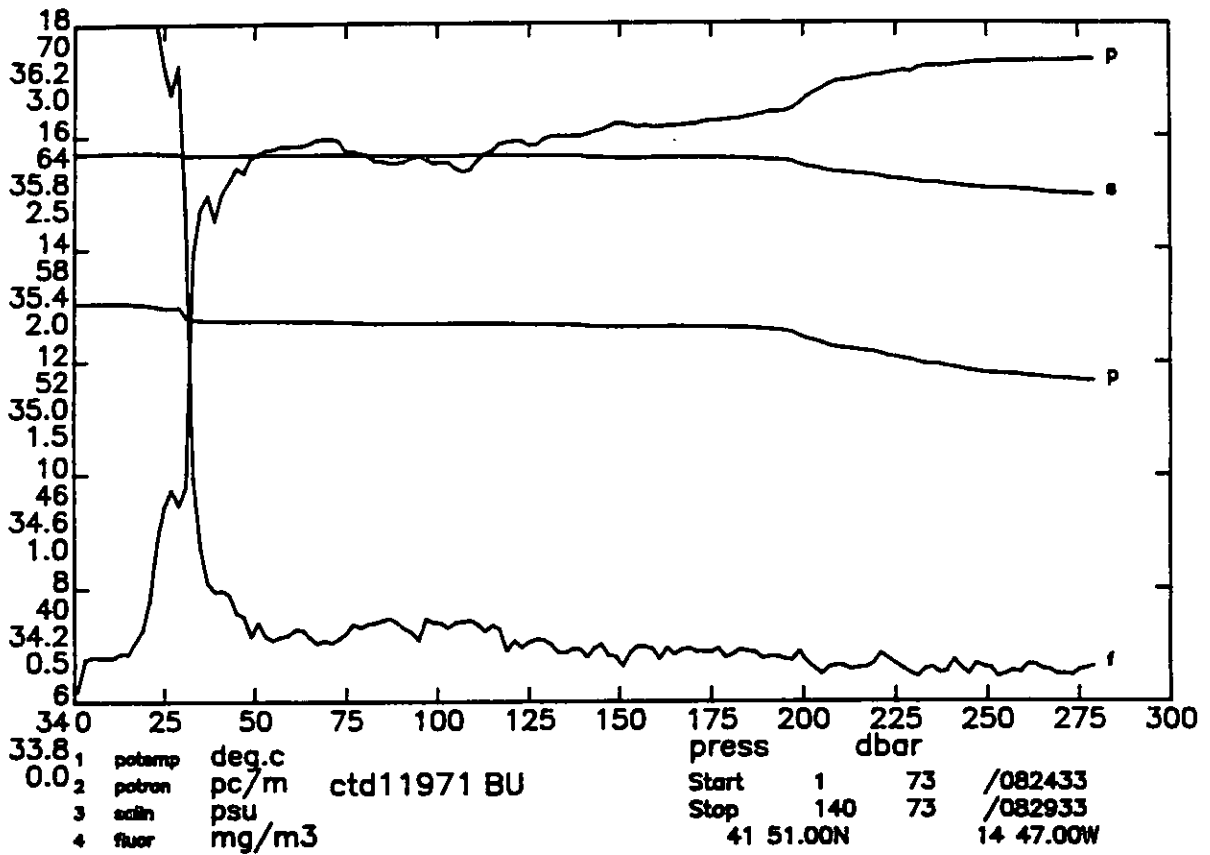


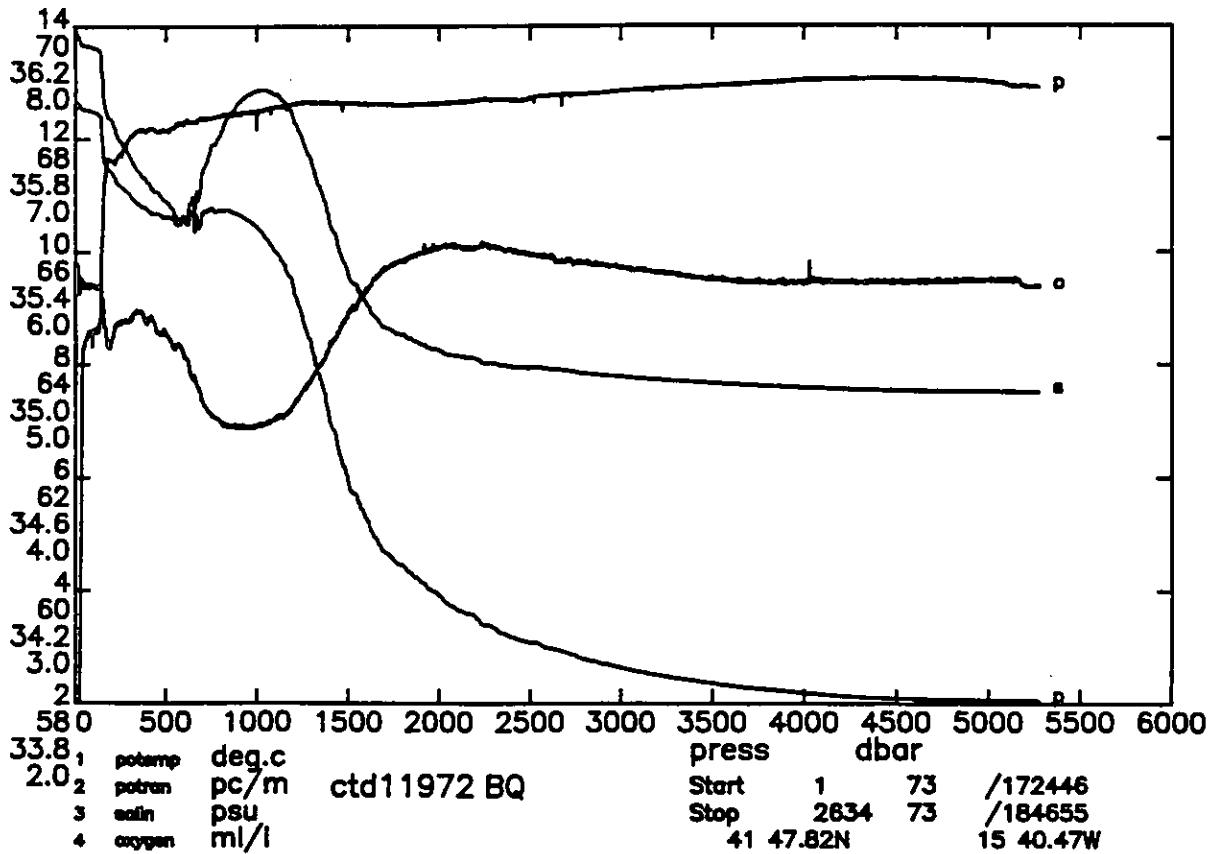
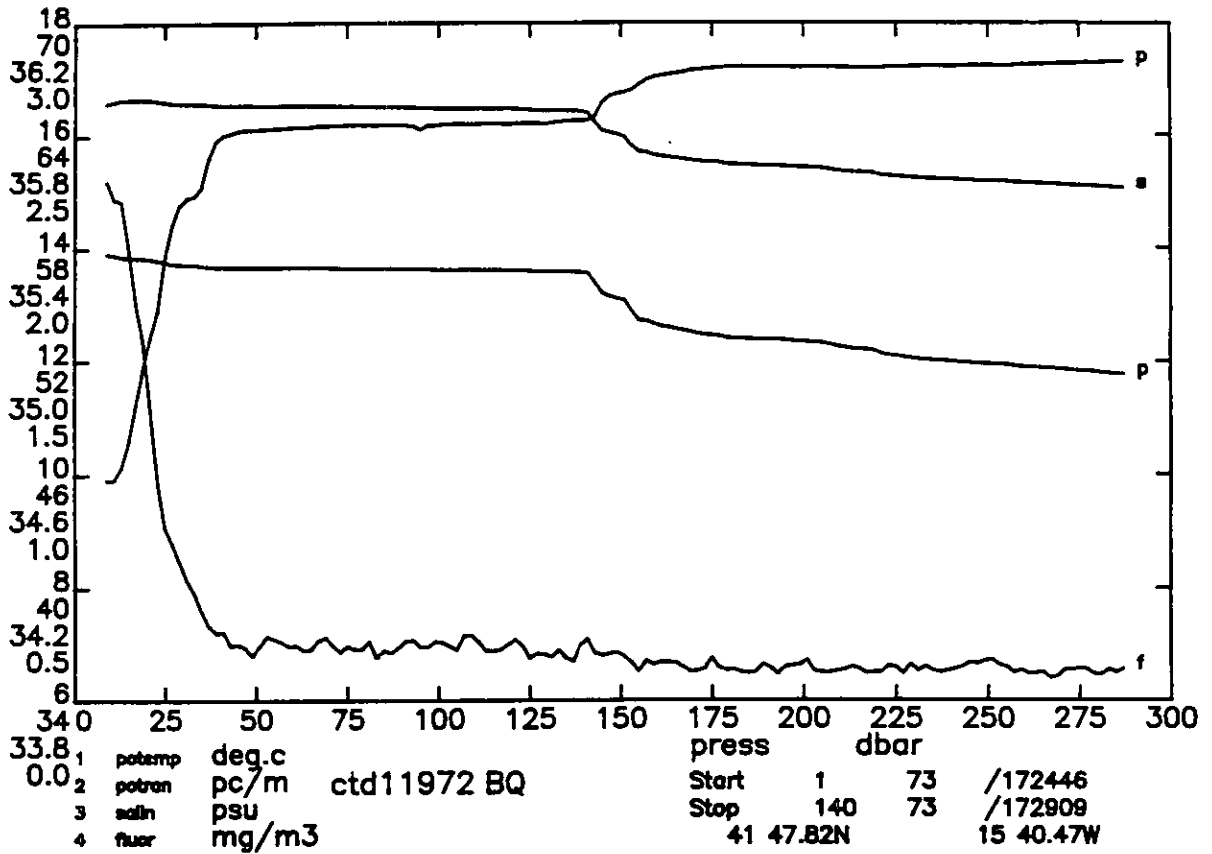


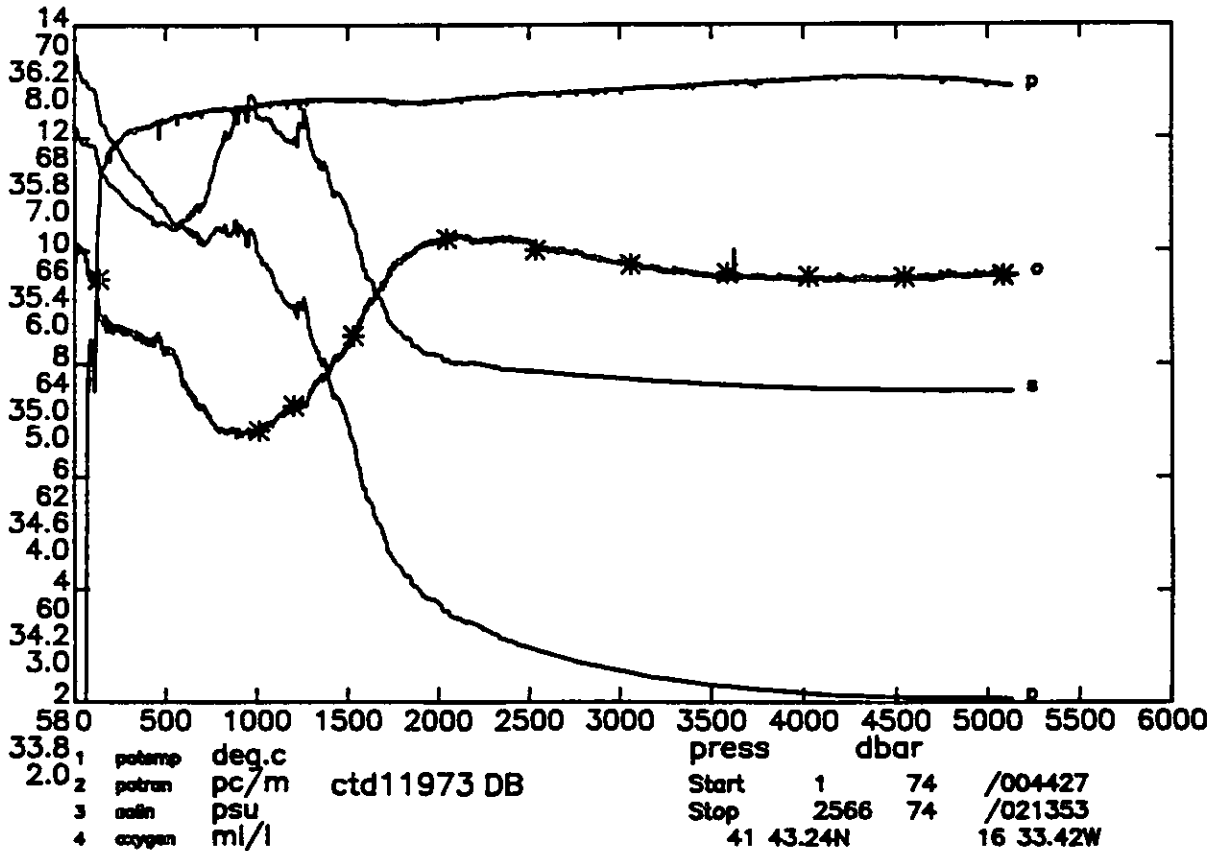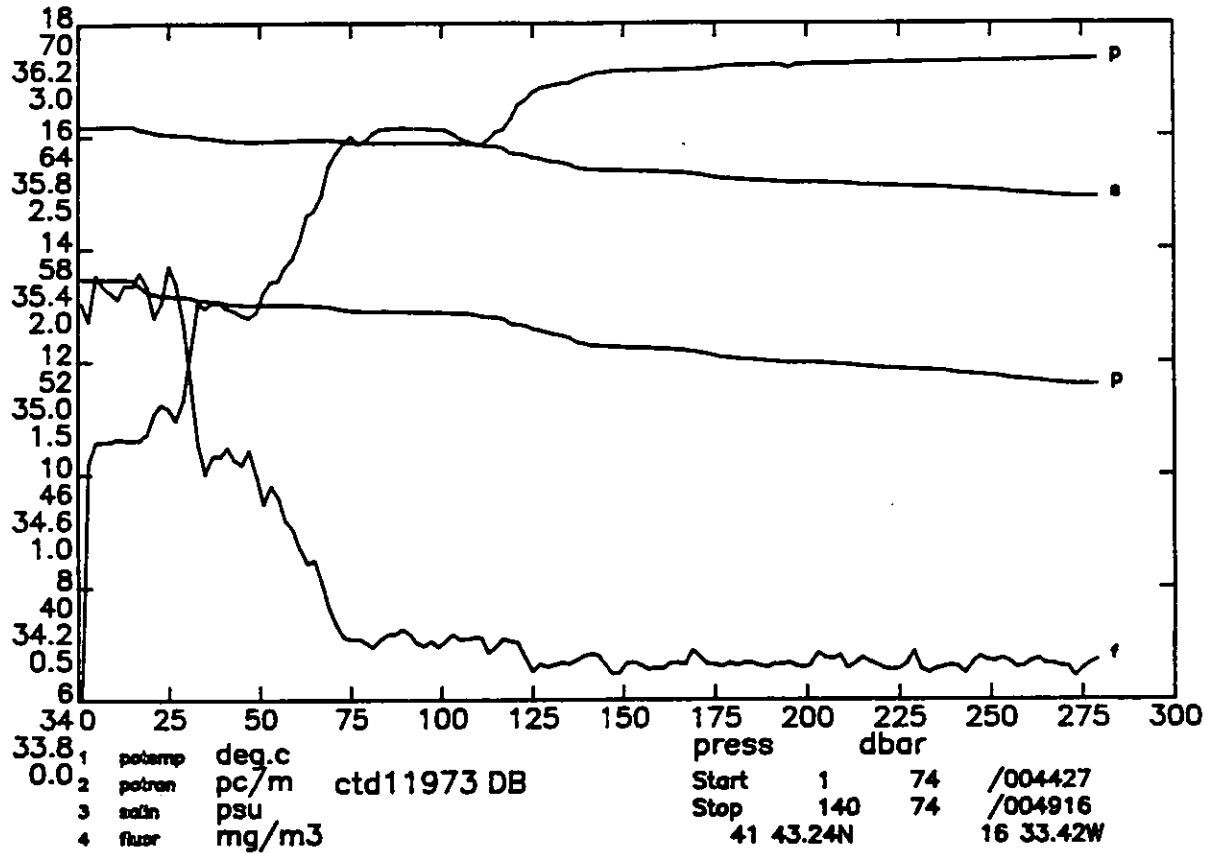

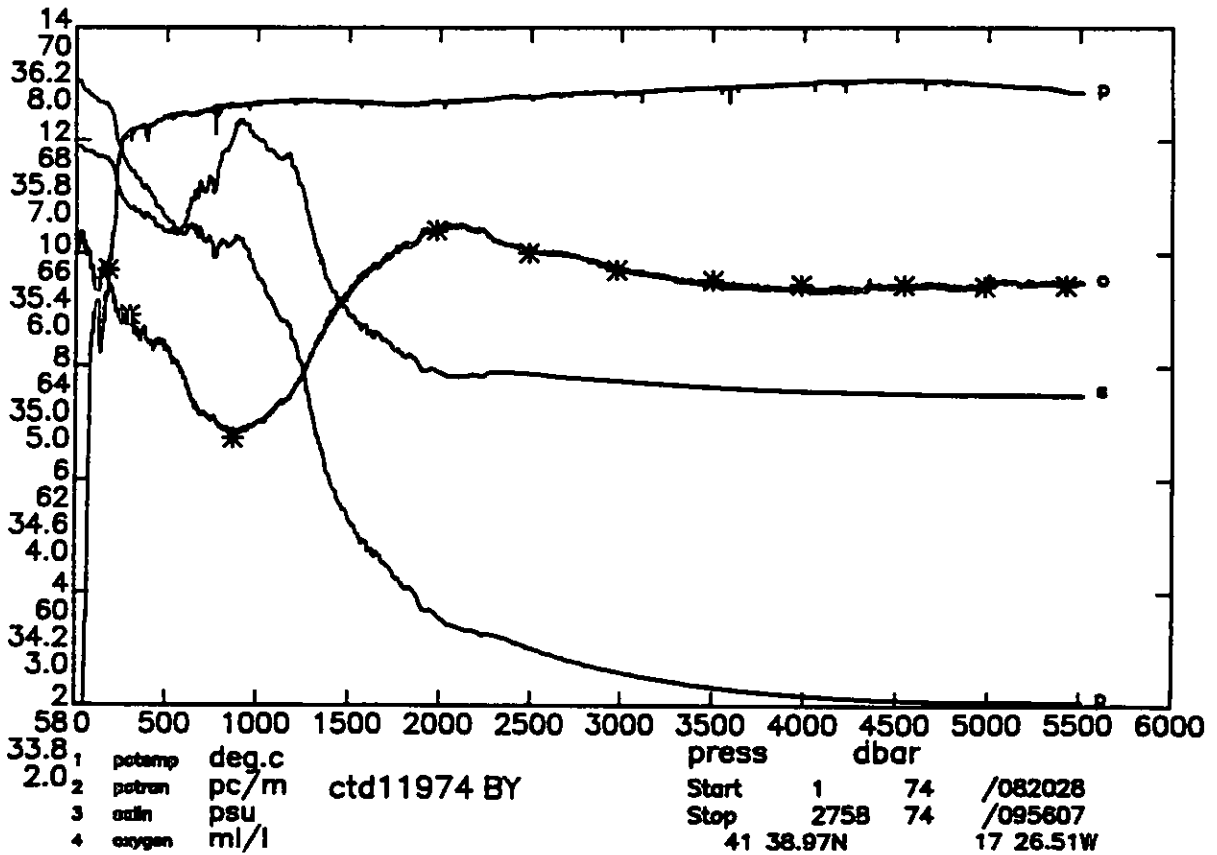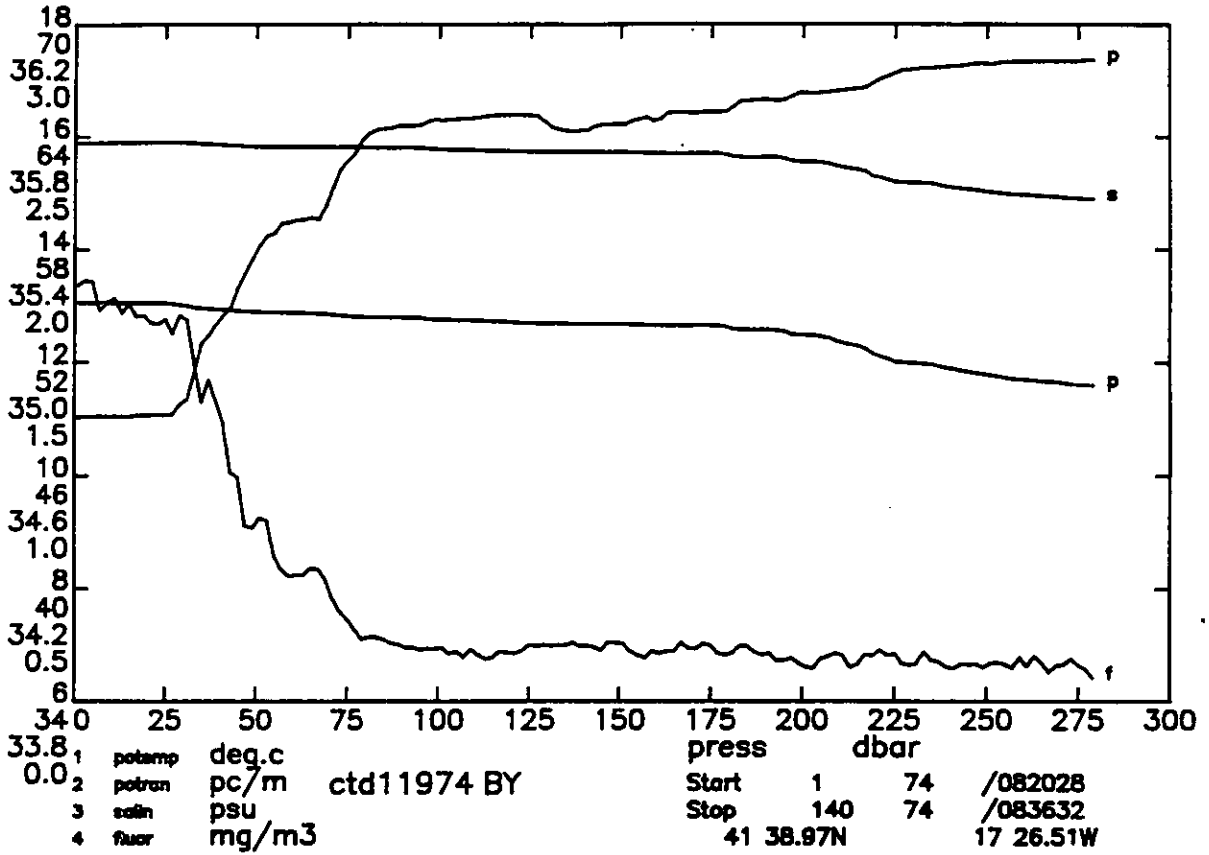

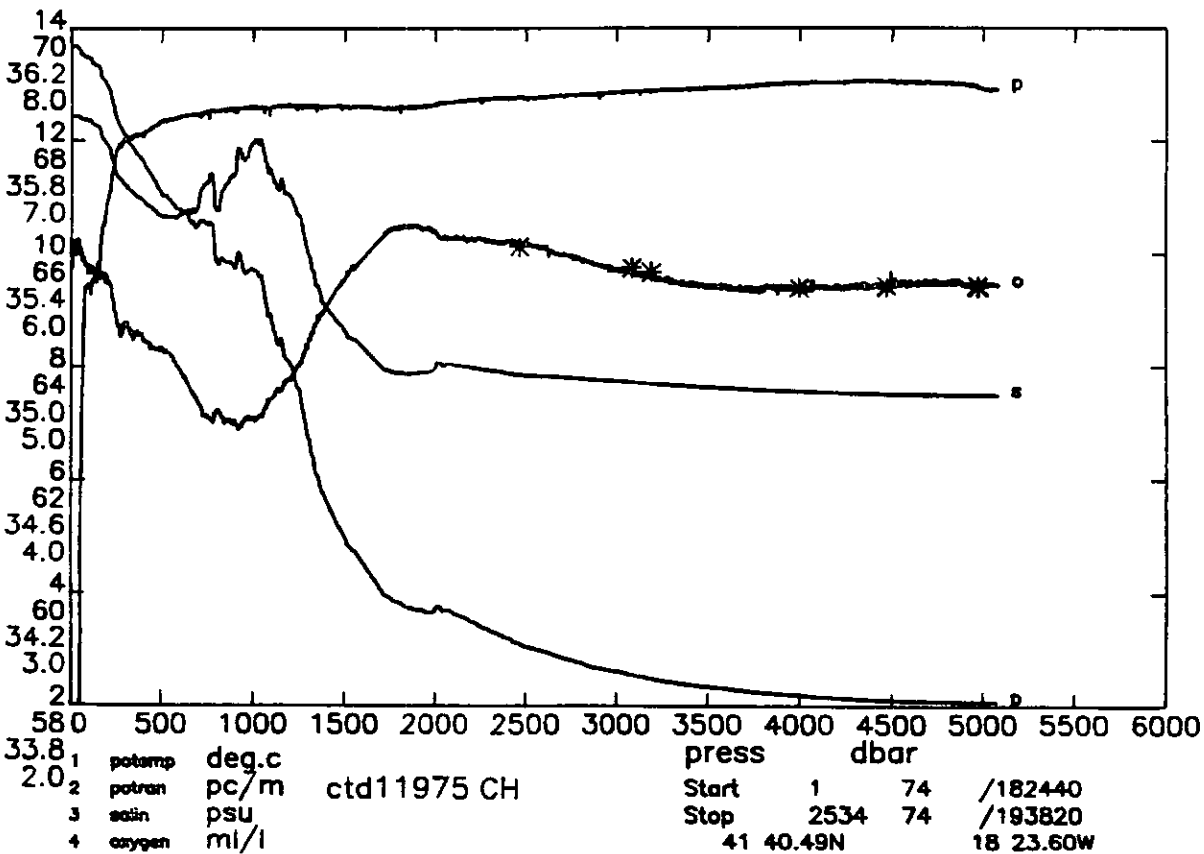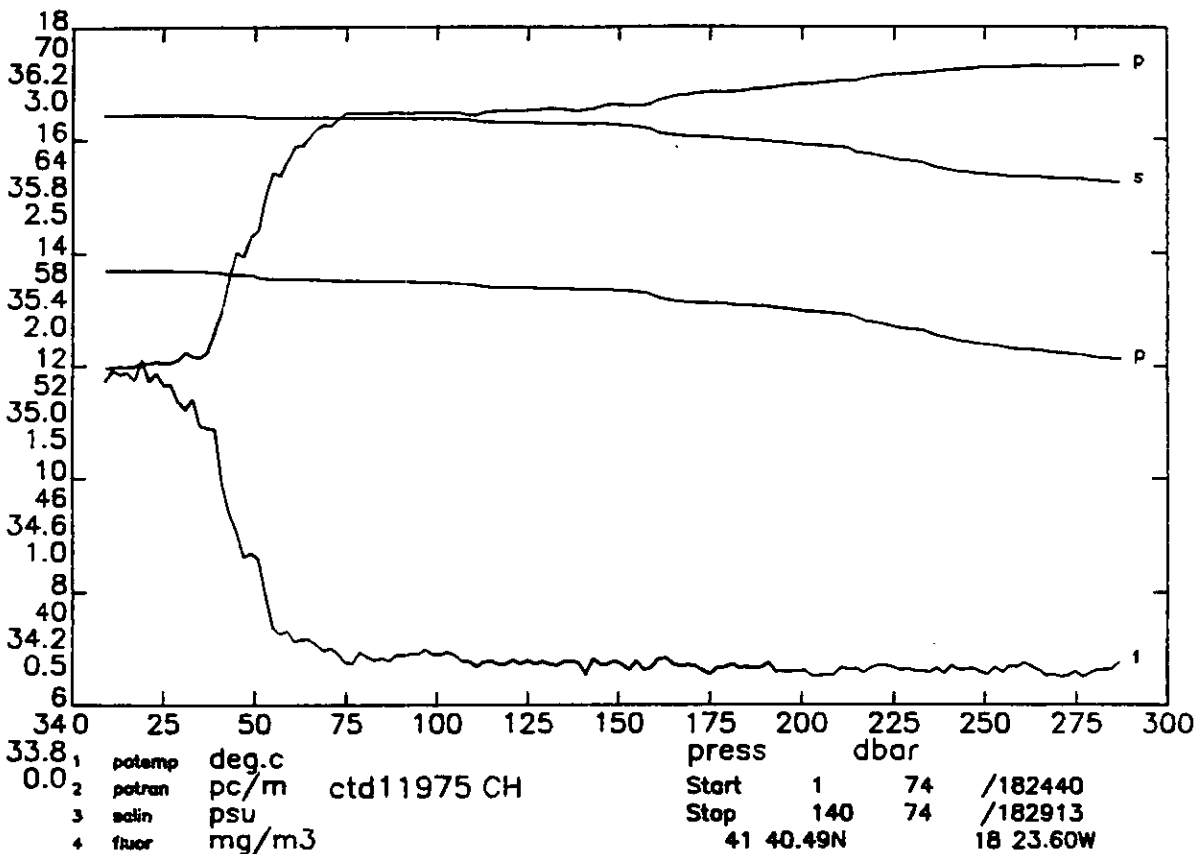

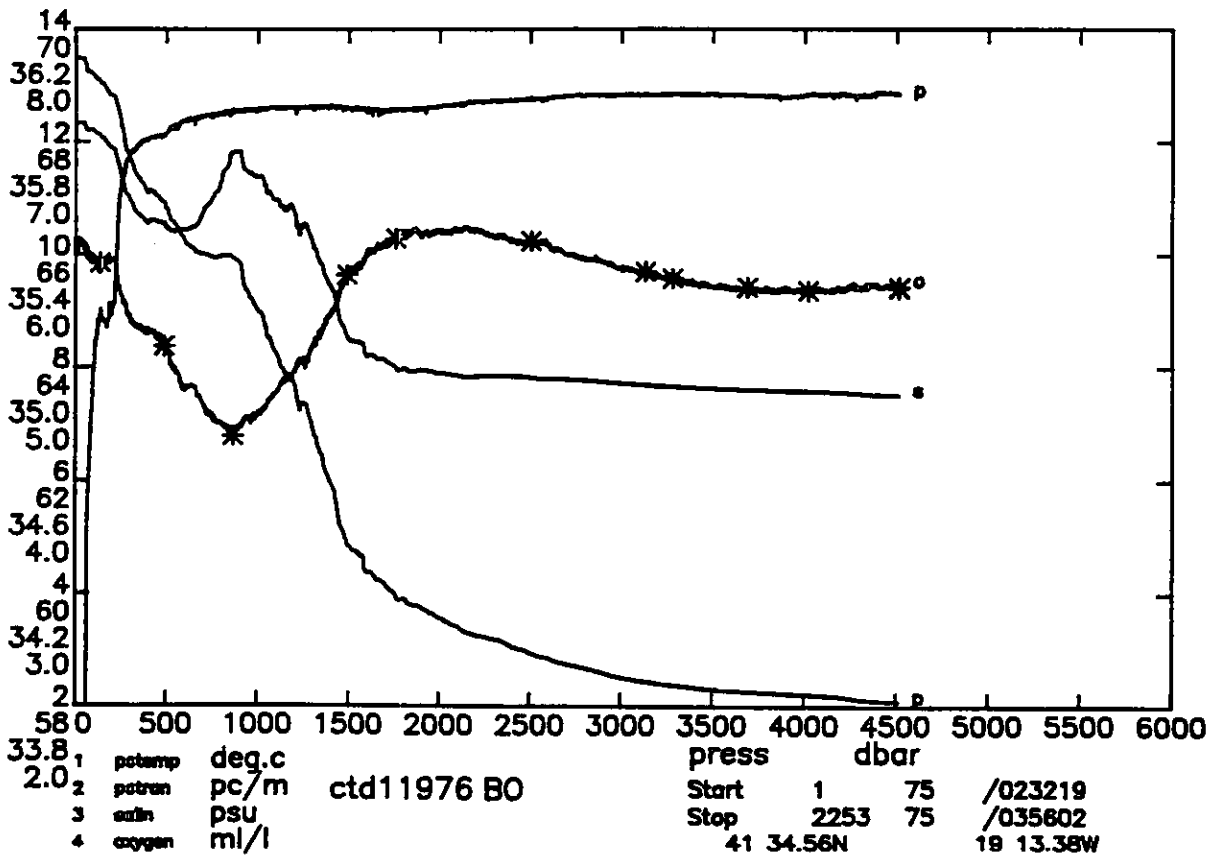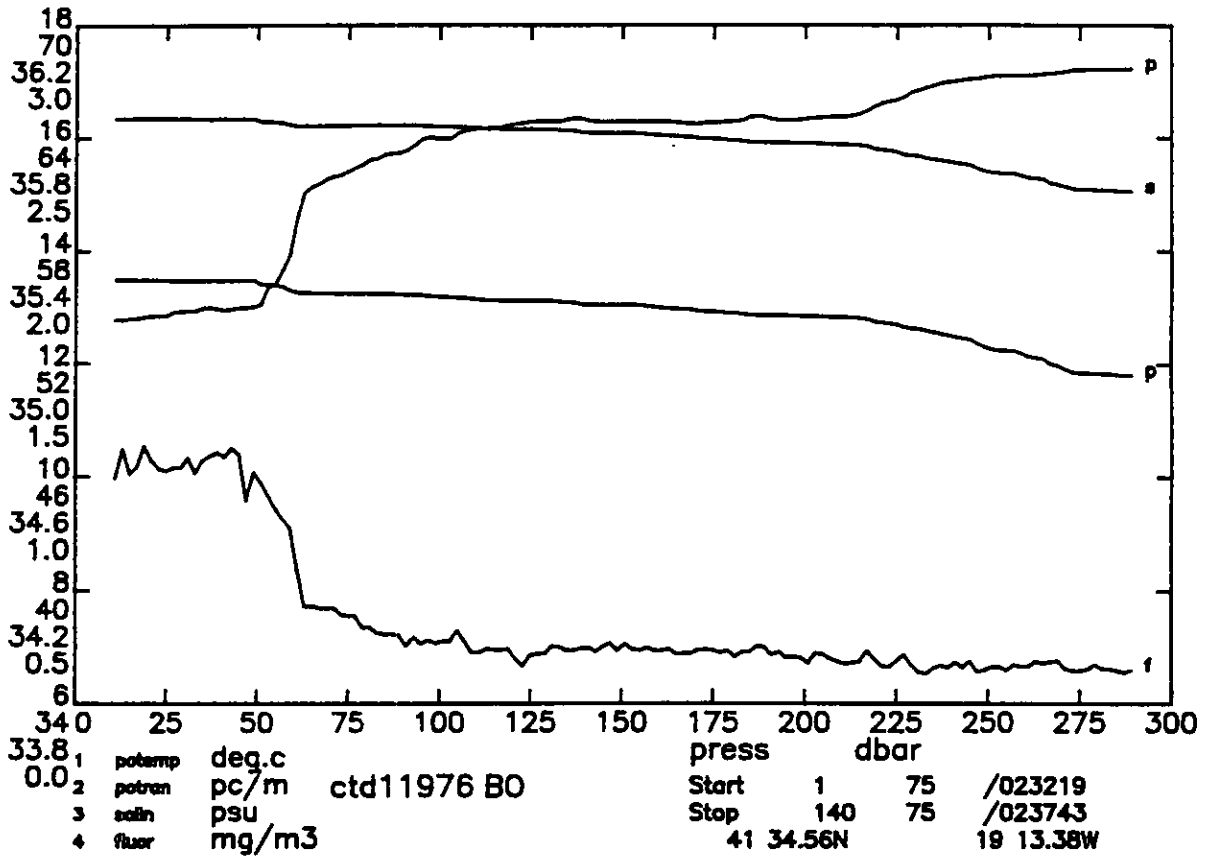

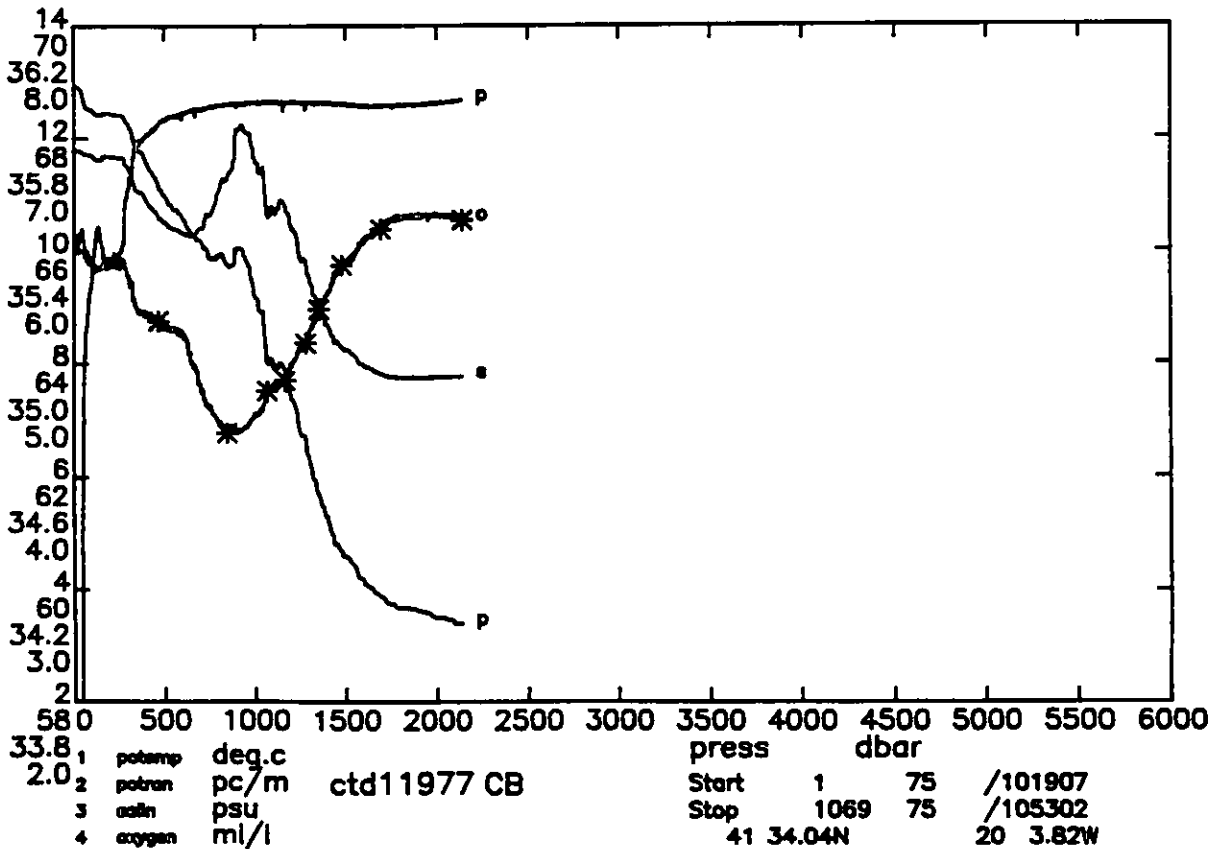
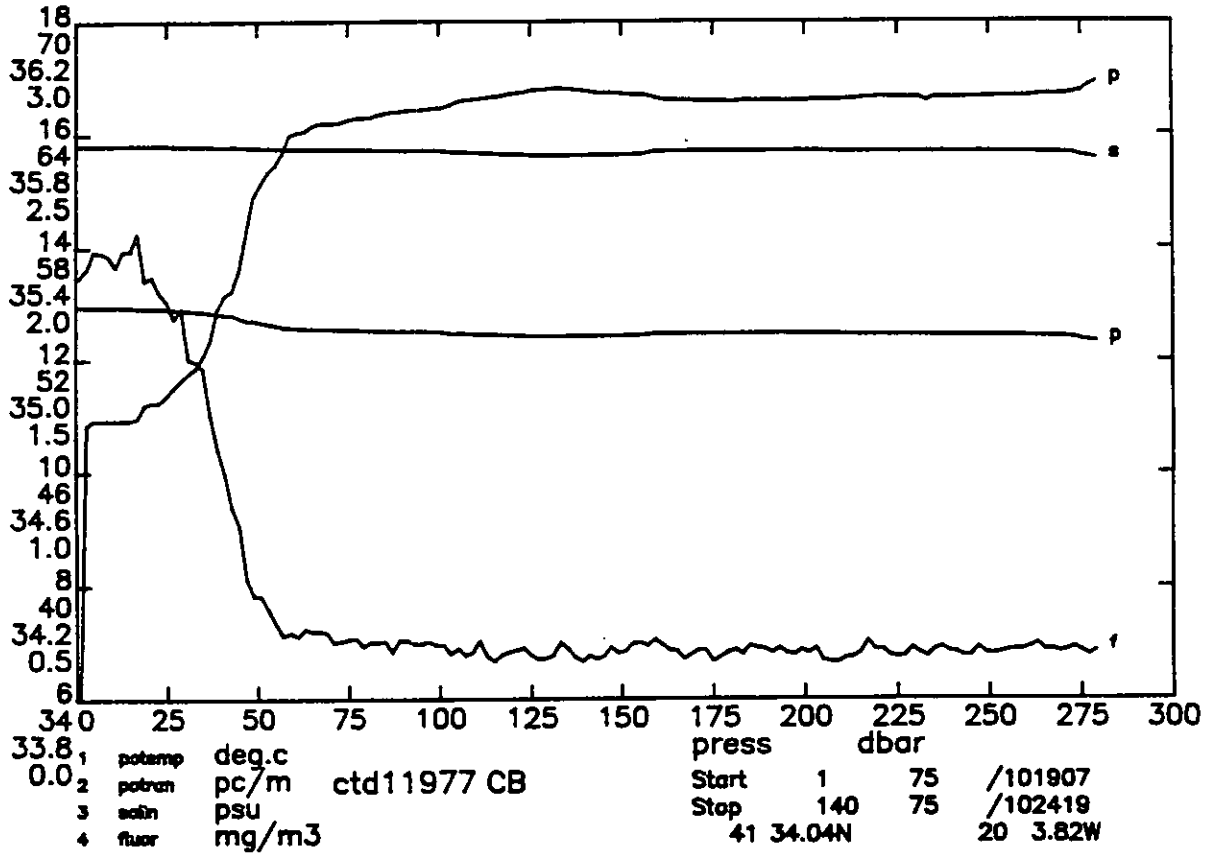




DISCOVERY CRUISE 189 STATION 11977



pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	12.944	35.760	6.09	12.943	48.76	1.94	26.993	35.675	43.978	0.011	1501.1	10.	105.73	-9.999
20.	12.927	35.759	6.13	12.924	49.66	1.86	26.996	35.679	43.982	0.021	1501.2	20.	105.73	0.992
30.	12.892	35.757	6.14	12.888	51.11	1.62	27.002	35.686	43.991	0.032	1501.2	30.	105.45	1.389
40.	12.819	35.754	6.16	12.813	55.08	1.05	27.015	35.702	44.009	0.042	1501.1	40.	104.55	1.992
50.	12.688	35.749	6.10	12.681	61.00	0.46	27.038	35.730	44.042	0.053	1500.9	50.	102.67	2.695
60.	12.582	35.746	5.95	12.574	64.02	0.29	27.057	35.753	44.069	0.063	1500.7	60.	101.17	2.444
70.	12.562	35.745	5.93	12.553	64.59	0.27	27.060	35.757	44.074	0.073	1500.8	69.	101.15	1.019
80.	12.545	35.743	5.96	12.534	64.89	0.24	27.062	35.760	44.078	0.083	1500.9	79.	101.20	0.903
90.	12.527	35.741	5.93	12.514	65.24	0.26	27.064	35.763	44.081	0.093	1501.0	89.	101.31	0.770
100.	12.521	35.740	5.91	12.507	65.42	0.24	27.065	35.764	44.083	0.103	1501.1	99.	101.51	0.538
120.	12.459	35.727	5.83	12.443	66.16	0.21	27.068	35.769	44.091	0.124	1501.2	119.	101.83	0.658
140.	12.433	35.724	5.84	12.414	66.28	0.18	27.071	35.773	44.096	0.144	1501.5	139.	102.10	0.708
160.	12.477	35.737	5.85	12.455	65.86	0.25	27.073	35.774	44.095	0.164	1502.0	159.	102.50	0.550
180.	12.480	35.738	5.89	12.456	65.70	0.21	27.074	35.774	44.095	0.185	1502.3	179.	102.99	0.368
200.	12.473	35.737	5.93	12.446	65.76	0.21	27.075	35.776	44.097	0.206	1502.6	198.	103.48	0.392
220.	12.460	35.735	5.88	12.430	65.95	0.22	27.076	35.778	44.100	0.226	1502.9	218.	103.90	0.495
240.	12.461	35.734	5.90	12.429	65.91	0.21	27.076	35.777	44.099	0.247	1503.2	238.	104.52	-0.266
260.	12.454	35.733	5.93	12.419	66.00	0.23	27.077	35.779	44.101	0.268	1503.5	258.	104.97	0.454
280.	12.355	35.709	5.86	12.317	66.82	0.18	27.078	35.785	44.111	0.289	1503.5	278.	105.37	0.533
300.	12.262	35.691	5.78	12.222	67.11	0.14	27.083	35.794	44.124	0.310	1503.5	297.	105.40	0.944
350.	11.848	35.613	5.48	11.802	67.96	0.19	27.103	35.831	44.178	0.363	1502.8	347.	104.62	1.206
400.	11.610	35.576	5.45	11.559	68.08	0.16	27.121	35.859	44.215	0.415	1502.8	396.	104.14	1.107
450.	11.352	35.539	5.40	11.295	68.18	0.17	27.141	35.891	44.257	0.467	1502.7	446.	103.28	1.209
500.	11.053	35.504	5.34	10.990	68.34	0.16	27.170	35.932	44.311	0.518	1502.4	495.	101.61	1.409
550.	10.807	35.478	5.32	10.738	68.42	0.17	27.196	35.969	44.357	0.568	1502.4	545.	100.16	1.350
600.	10.639	35.464	5.25	10.564	68.48	0.18	27.215	35.996	44.391	0.618	1502.6	594.	99.34	1.178
650.	10.352	35.454	5.02	10.273	68.50	0.15	27.259	36.052	44.459	0.667	1502.4	644.	96.05	1.740
700.	10.250	35.483	4.77	10.165	68.53	0.17	27.301	36.097	44.508	0.715	1502.9	693.	93.24	1.641
750.	9.962	35.529	4.61	9.872	68.56	0.15	27.388	36.196	44.618	0.759	1502.7	743.	85.83	2.401
800.	10.012	35.620	4.49	9.916	68.60	0.17	27.451	36.256	44.675	0.801	1503.8	792.	81.19	1.977
850.	9.844	35.674	4.44	9.742	68.62	0.14	27.522	36.334	44.759	0.840	1504.1	842.	75.36	2.170
900.	10.150	35.832	4.40	10.040	68.61	0.16	27.595	36.392	44.803	0.877	1506.2	891.	70.33	2.043
950.	9.929	35.820	4.45	9.814	68.64	0.15	27.624	36.431	44.851	0.912	1506.3	940.	68.34	1.463
1000.	9.305	35.718	4.56	9.188	68.64	0.13	27.650	36.485	44.931	0.945	1504.7	990.	65.80	1.576
1100.	8.040	35.532	4.82	7.921	68.64	0.16	27.704	36.598	45.099	1.008	1501.4	1089.	59.88	1.642
1200.	7.501	35.477	4.98	7.375	68.64	0.16	27.741	36.661	45.186	1.067	1501.0	1187.	56.87	1.286
1300.	6.351	35.285	5.30	6.226	68.63	0.16	27.749	36.725	45.303	1.122	1498.0	1286.	54.53	1.168
1400.	5.344	35.131	5.64	5.219	68.62	0.16	27.753	36.780	45.407	1.176	1495.4	1384.	52.31	1.114
1500.	4.705	35.050	5.90	4.577	68.61	0.17	27.763	36.824	45.482	1.227	1494.4	1483.	50.33	1.047
1600.	4.236	34.991	6.09	4.104	68.57	0.14	27.768	36.853	45.535	1.277	1494.0	1581.	49.23	0.867
1700.	3.993	34.962	6.24	3.855	68.57	0.16	27.771	36.870	45.564	1.326	1494.7	1680.	48.91	0.680
1800.	3.807	34.950	6.28	3.662	68.59	0.15	27.781	36.890	45.593	1.374	1495.5	1778.	48.17	0.765
1900.	3.766	34.948	6.30	3.612	68.60	0.18	27.785	36.897	45.602	1.423	1497.0	1877.	48.54	0.451
2000.	3.655	34.949	6.32	3.493	68.62	0.12	27.797	36.915	45.627	1.471	1498.3	1975.	47.79	0.757
2100.	3.556	34.951	6.28	3.385	68.66	0.14	27.810	36.933	45.650	1.519	1499.5	2073.	47.02	0.759



Sample data



2136.	3.558	34.951	6.27	3.384
1689.	3.999	34.996	6.19	3.861
1475.	4.795	35.058	5.87	4.668
1350.	5.797	35.196	5.48	5.672
1277.	6.773	35.359	5.18	6.646
1164.	7.943	35.532	4.85	7.817
1064.	8.154	35.533	4.76	8.039
464.	11.204	35.542	5.38	11.145

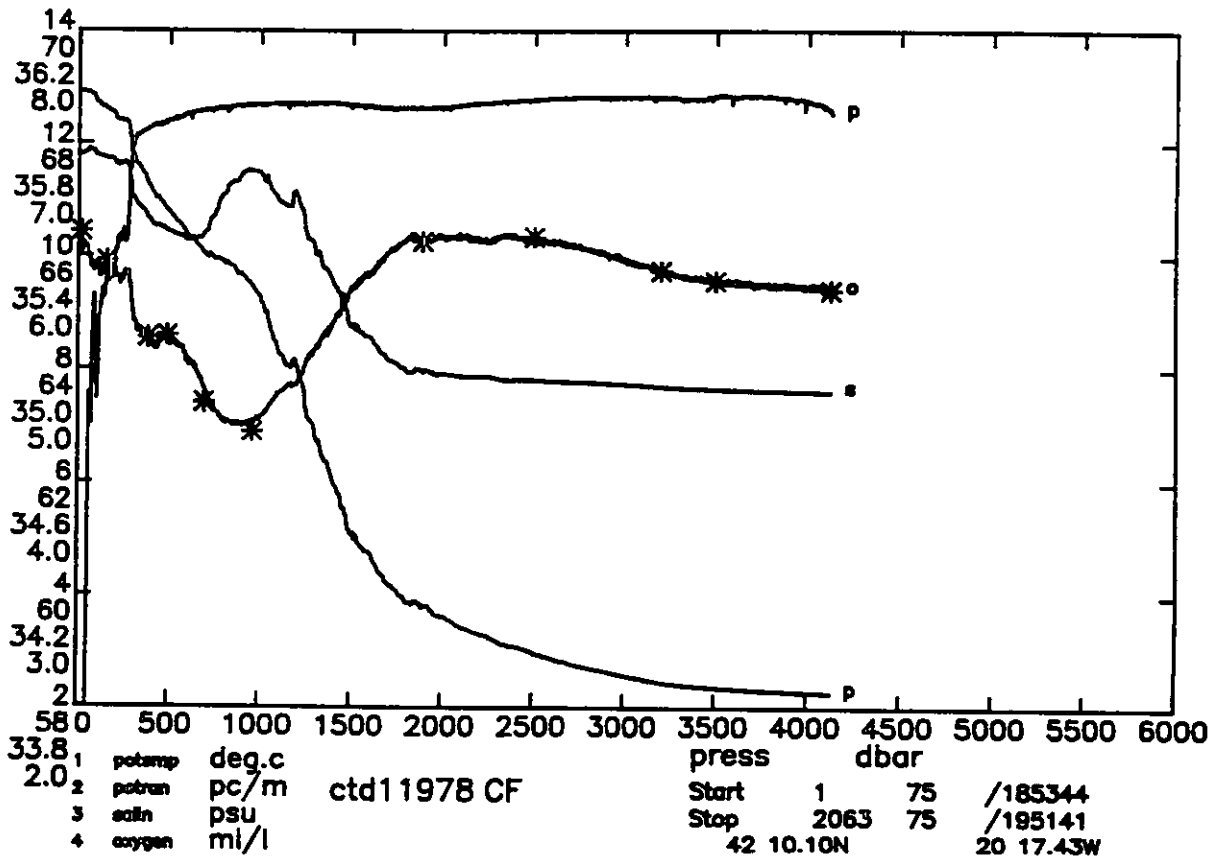
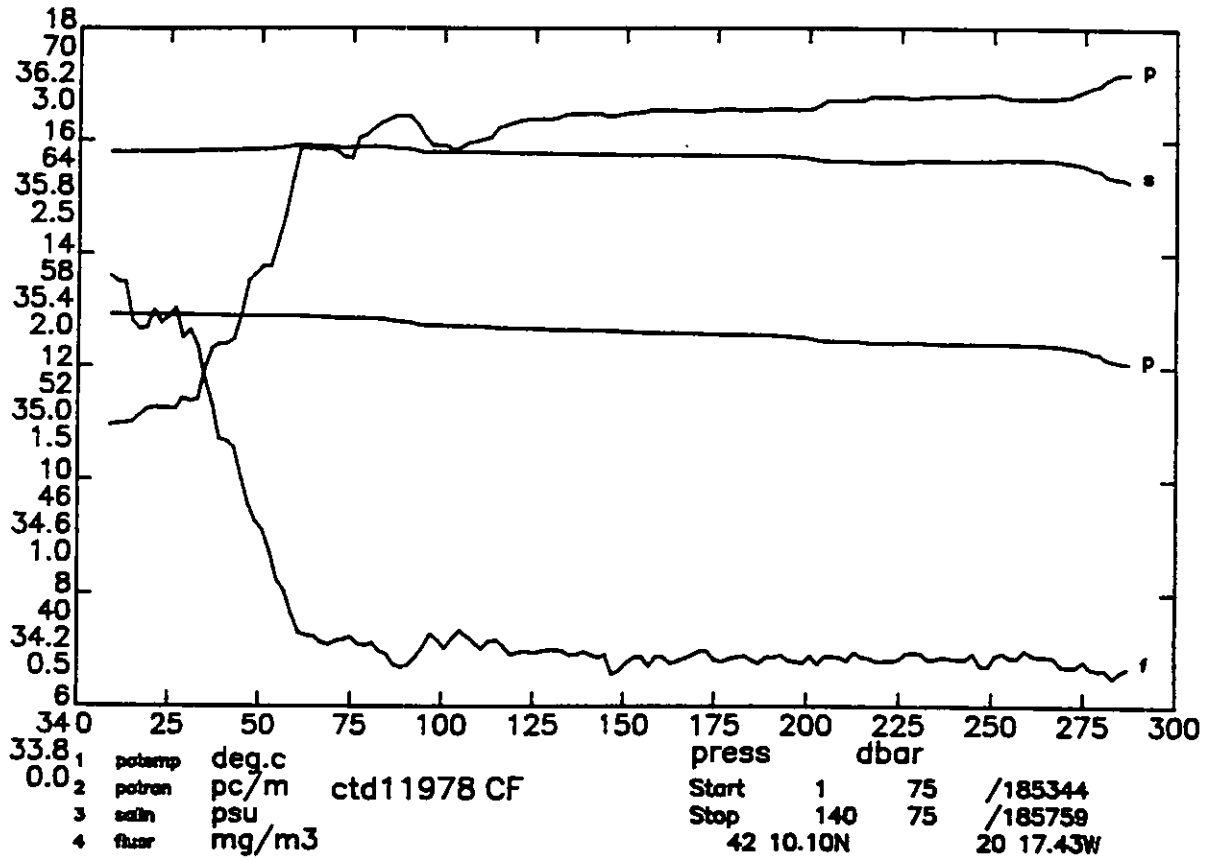


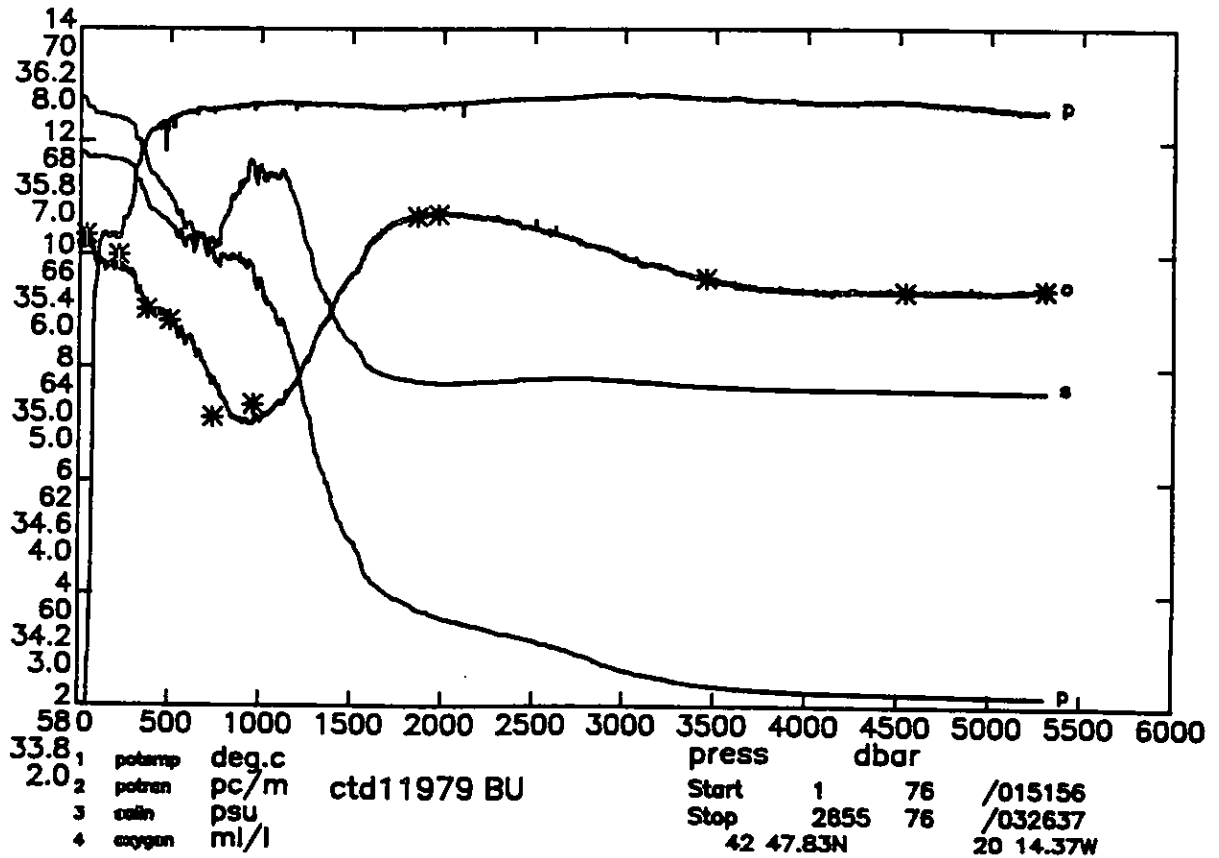
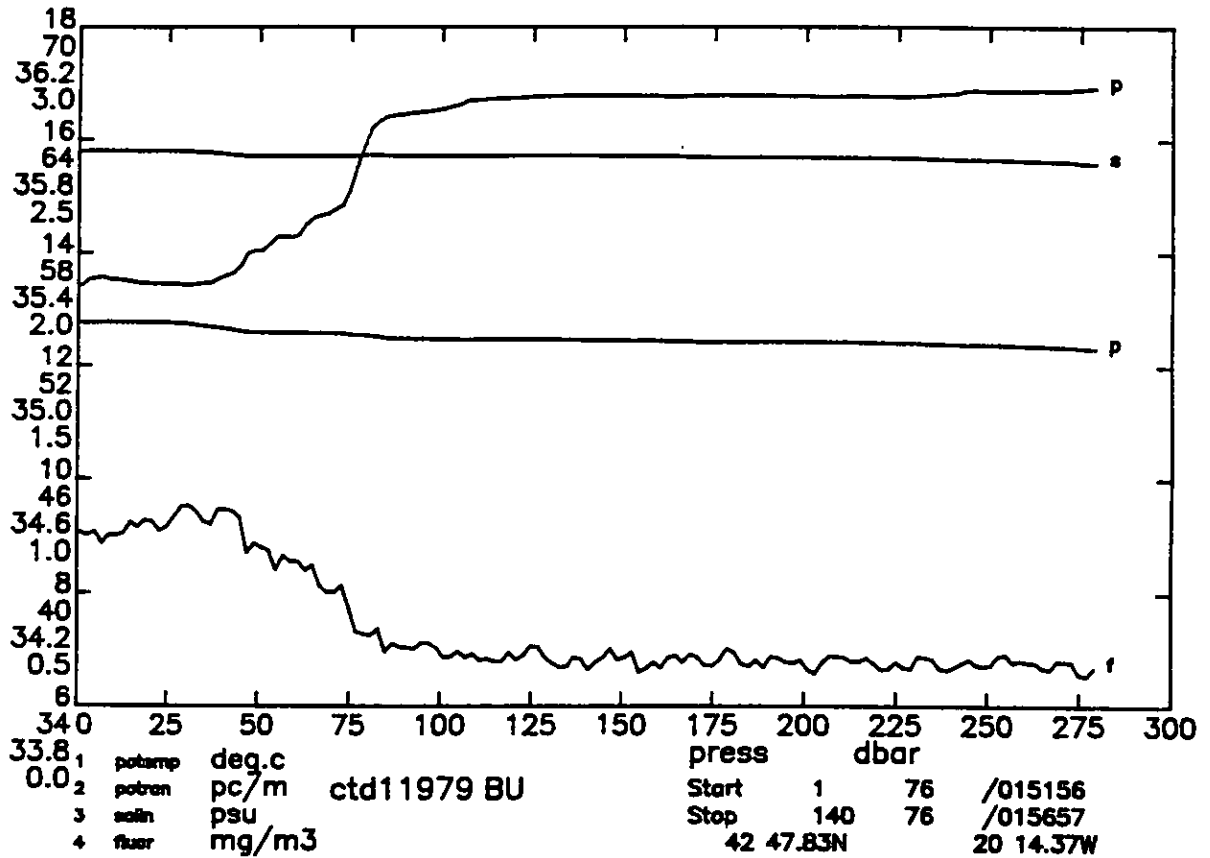


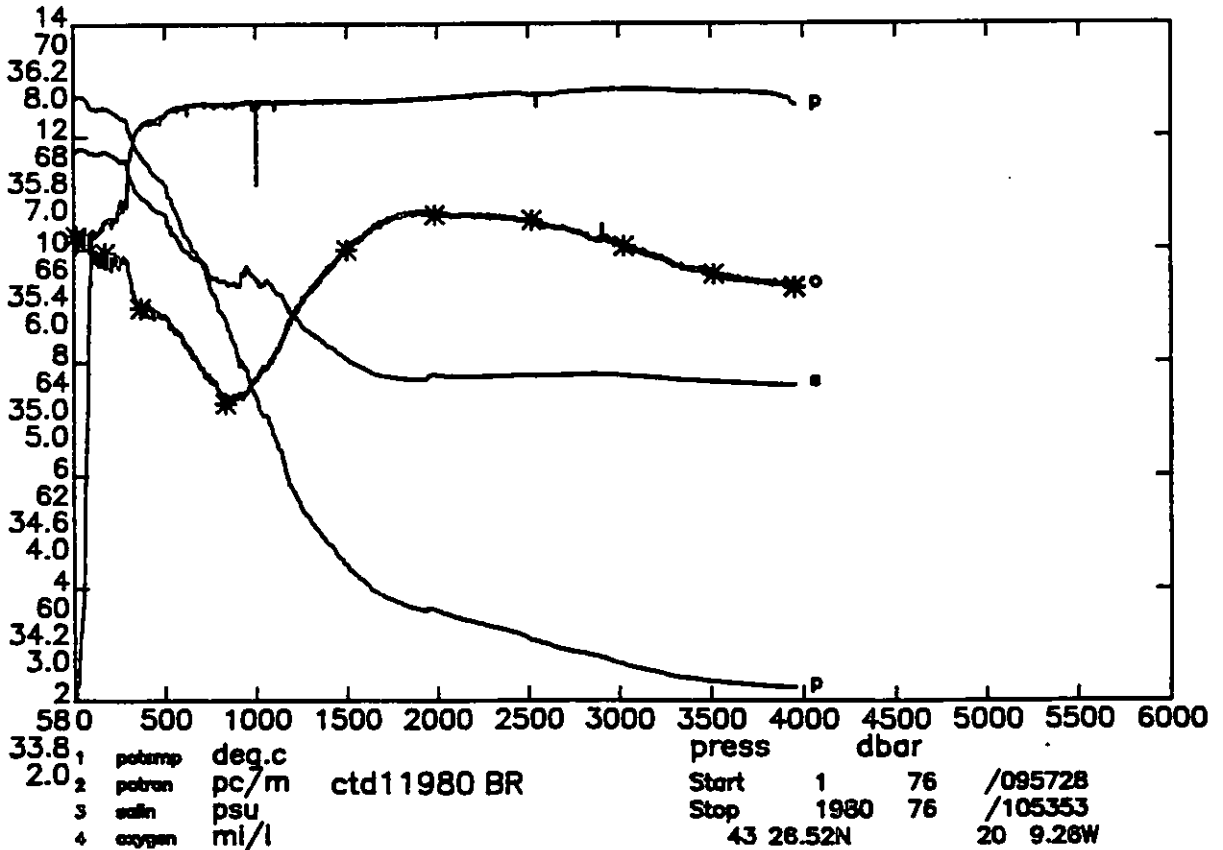
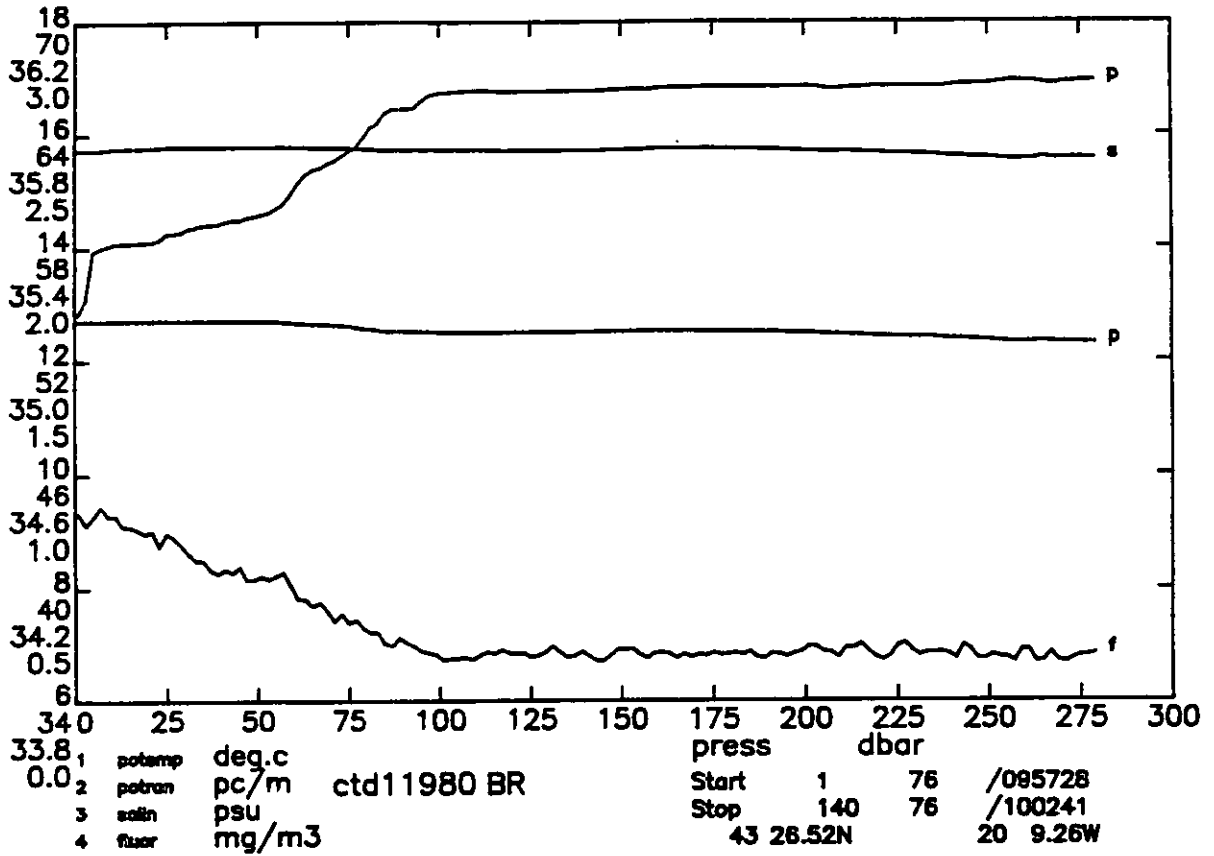


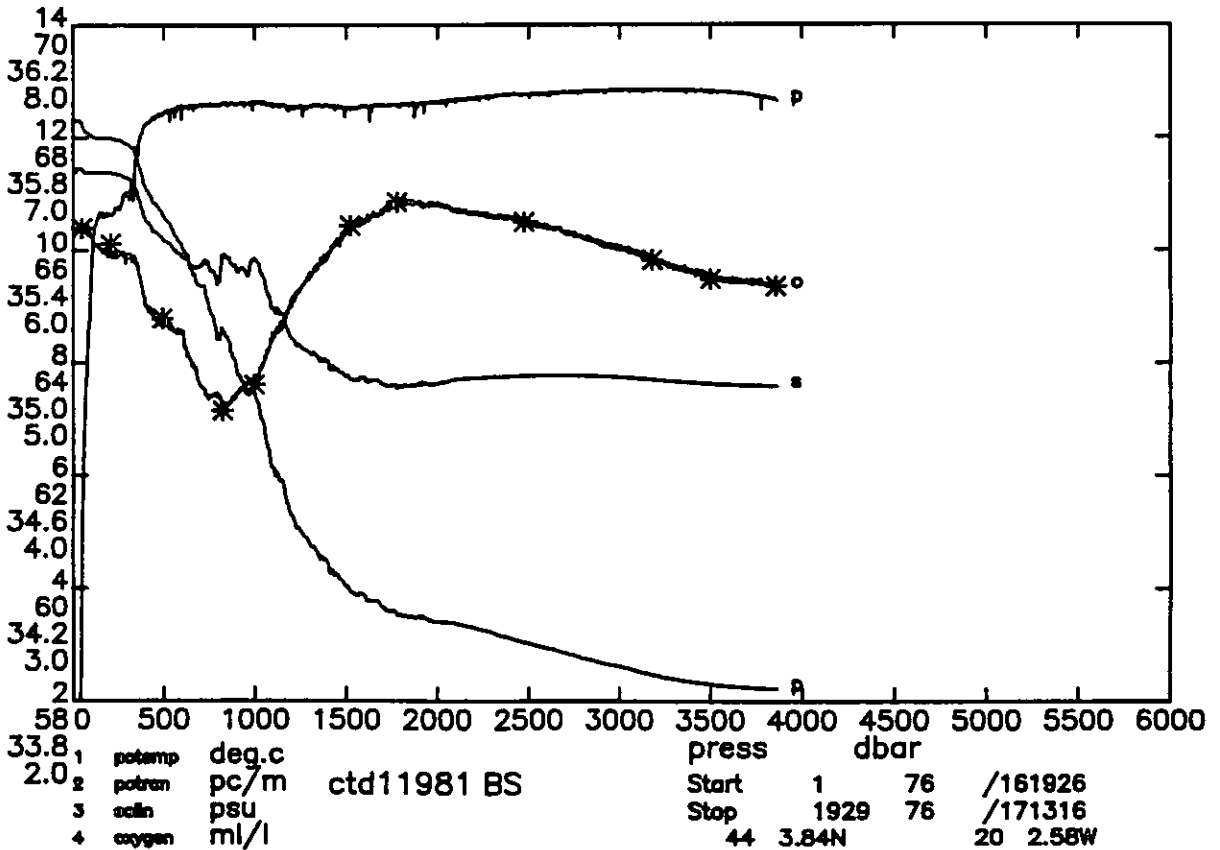
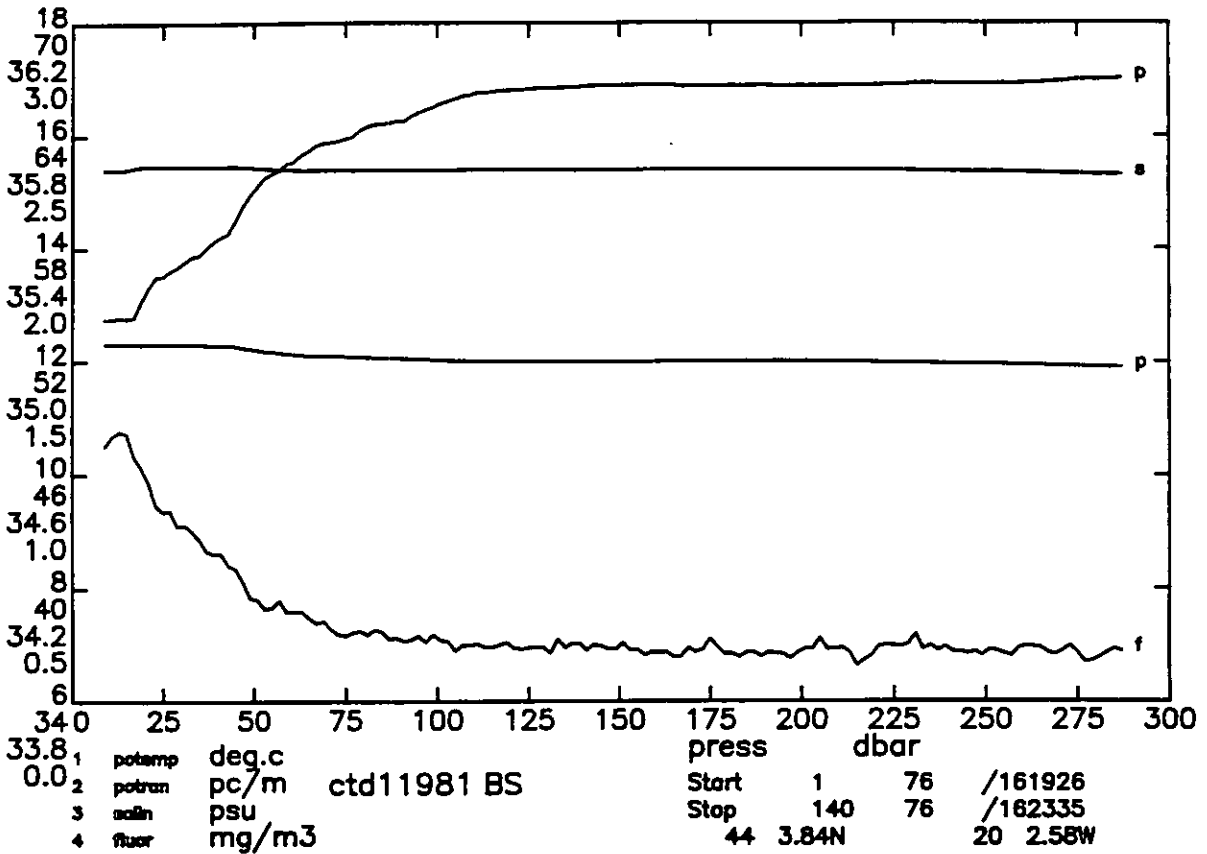


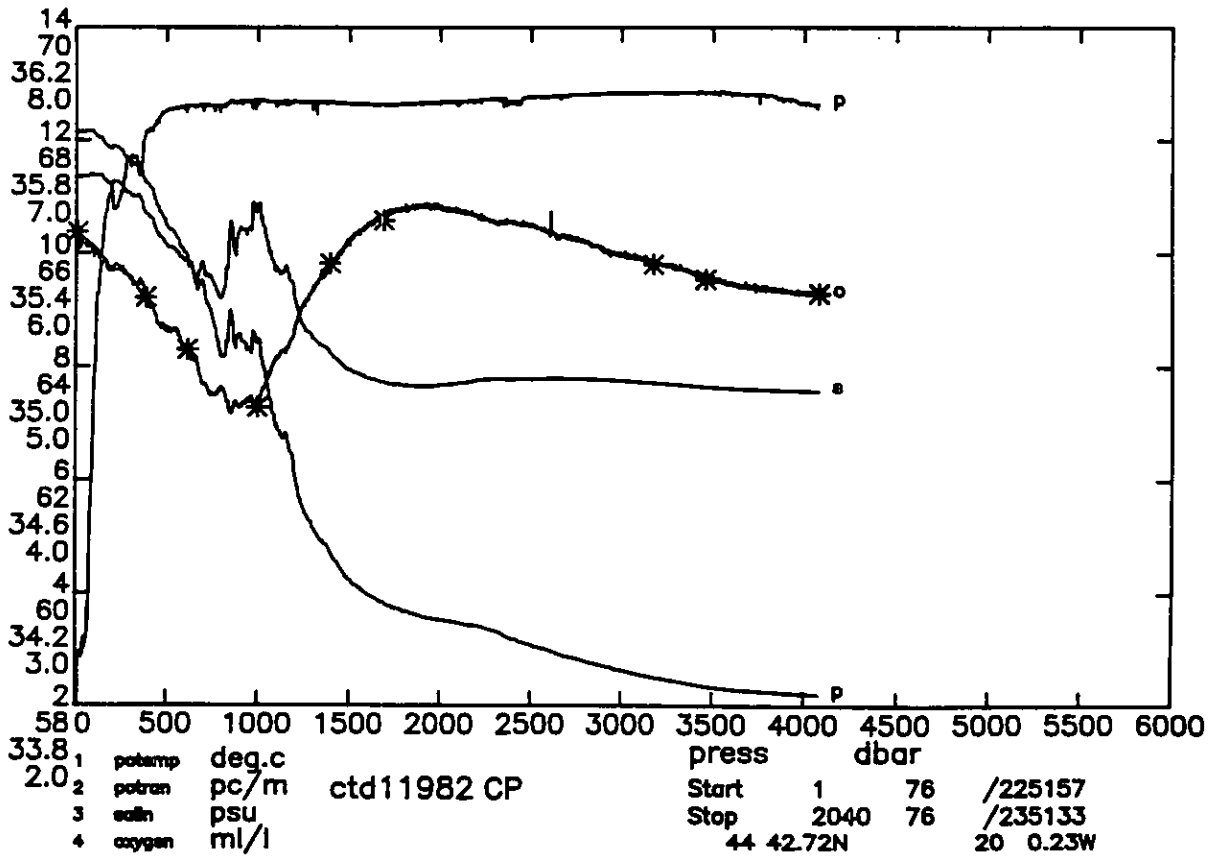
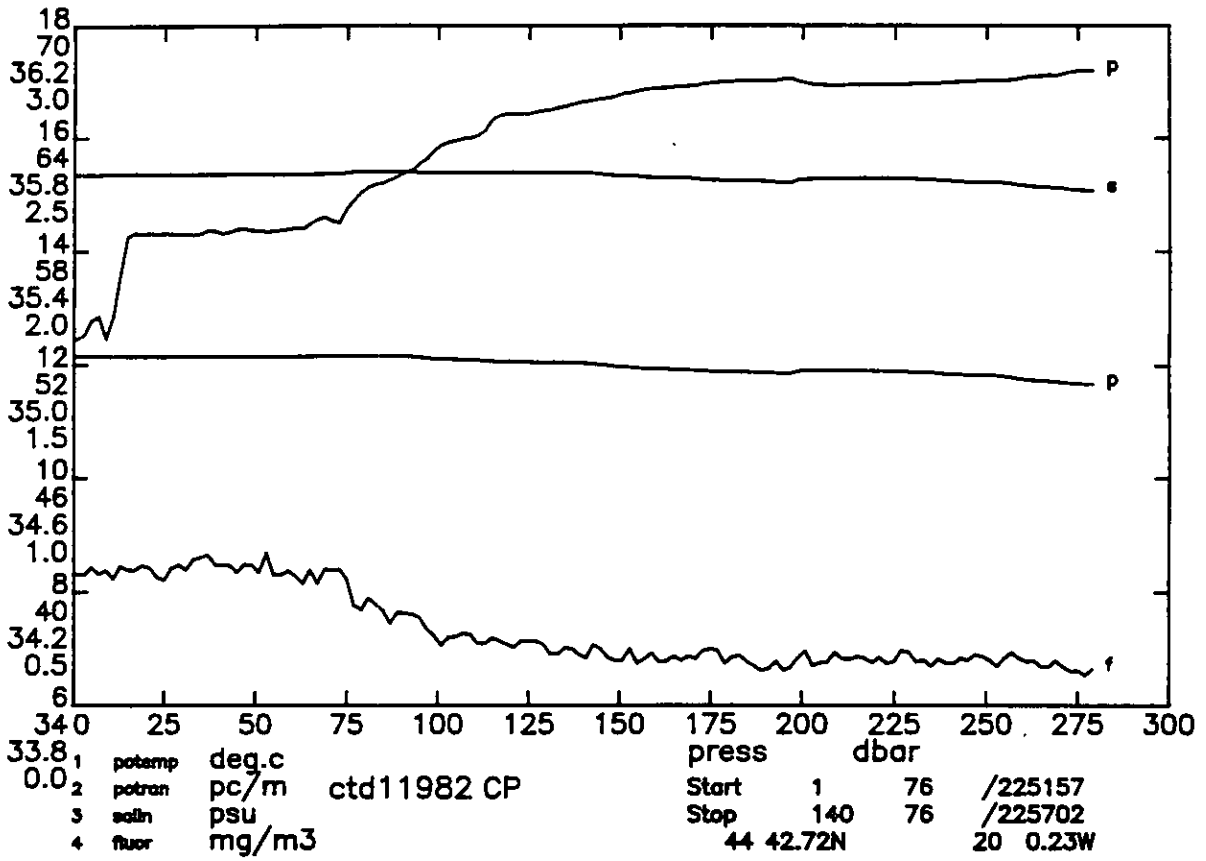


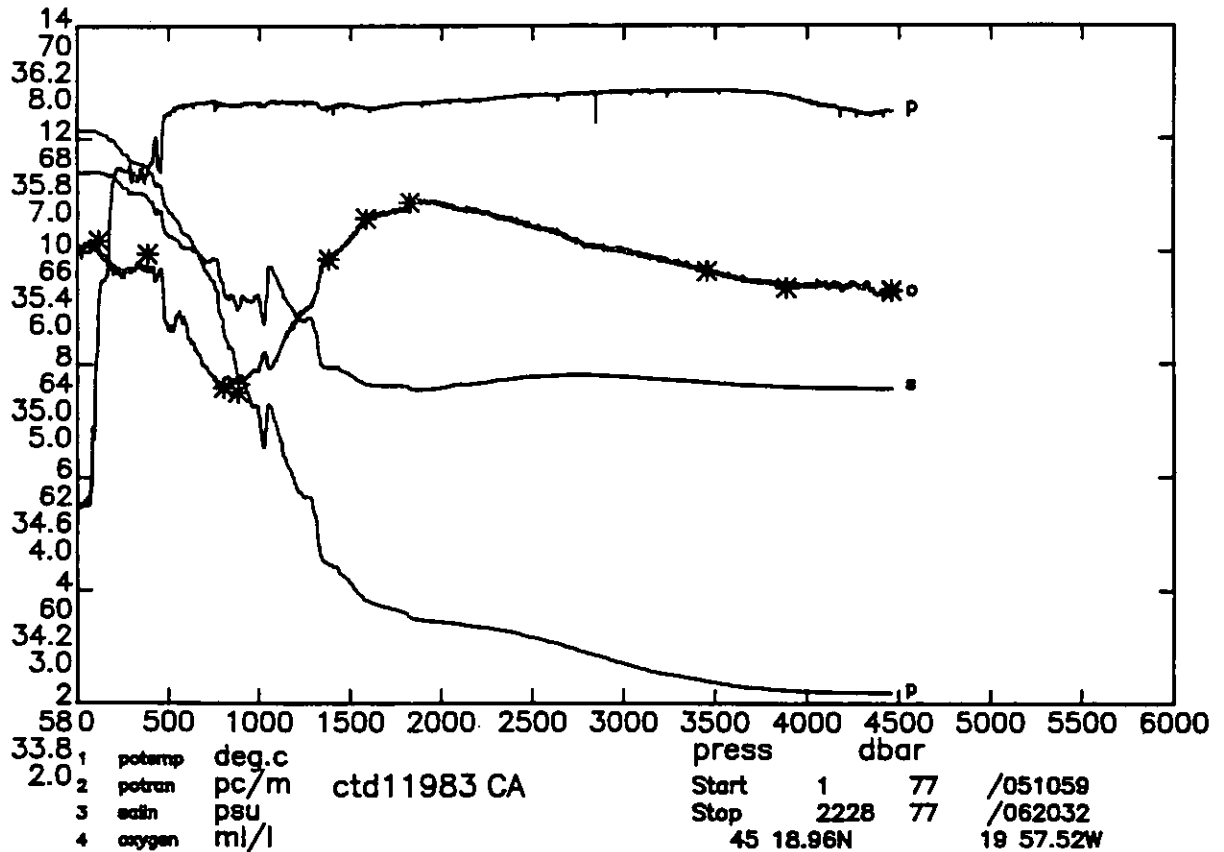
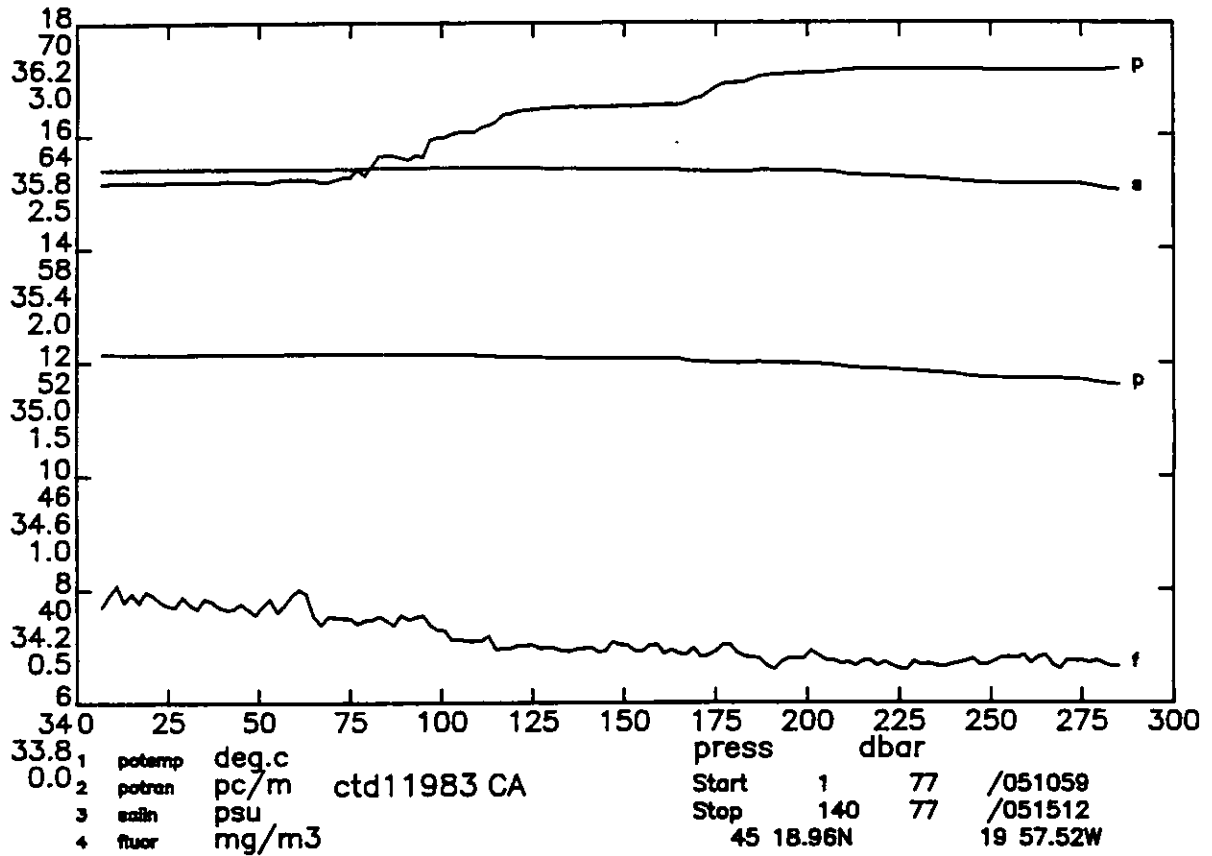


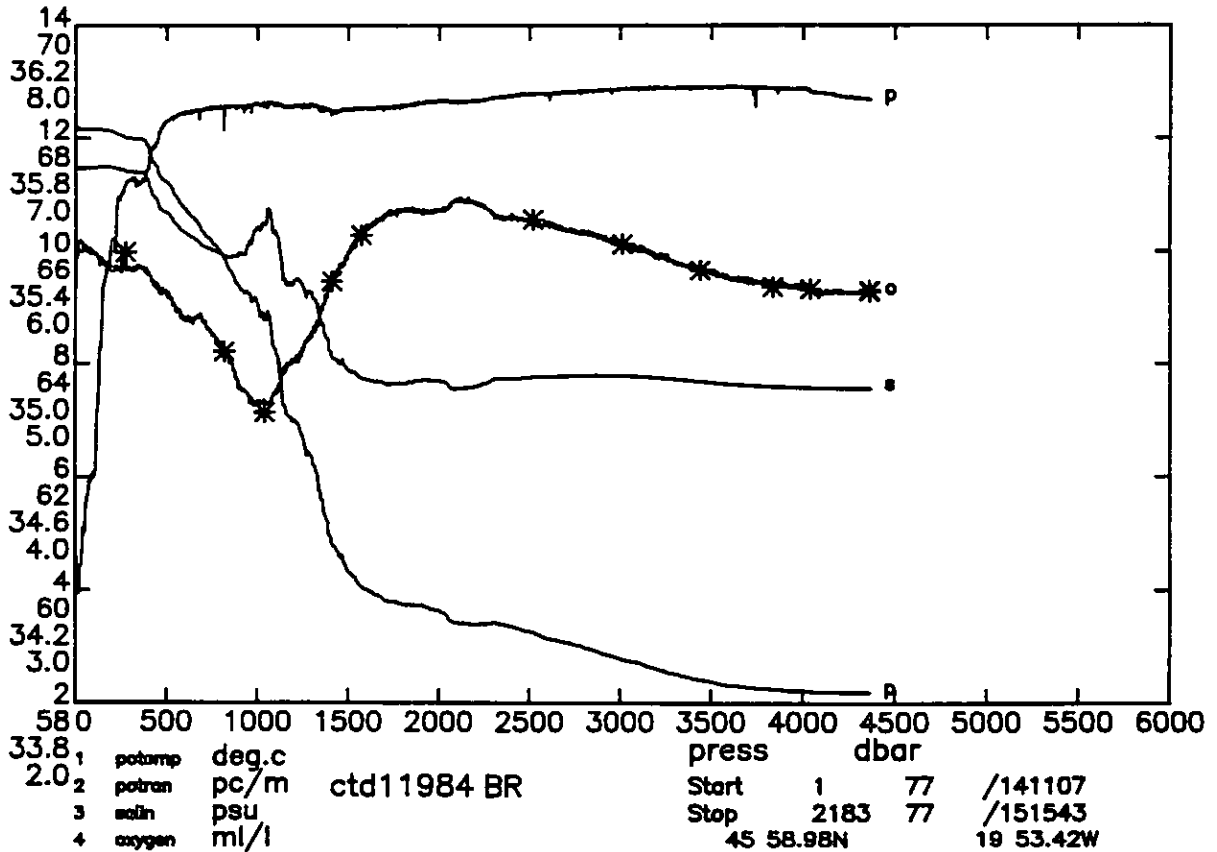
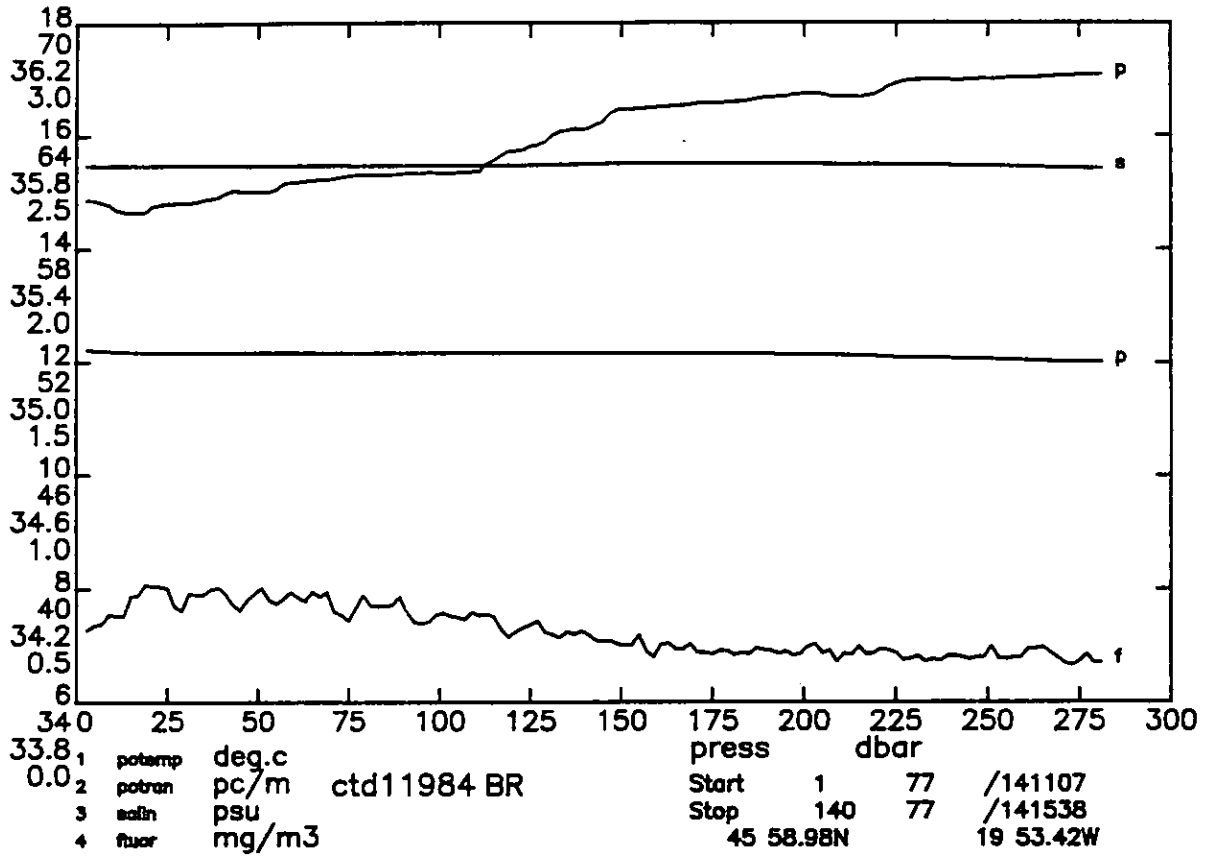


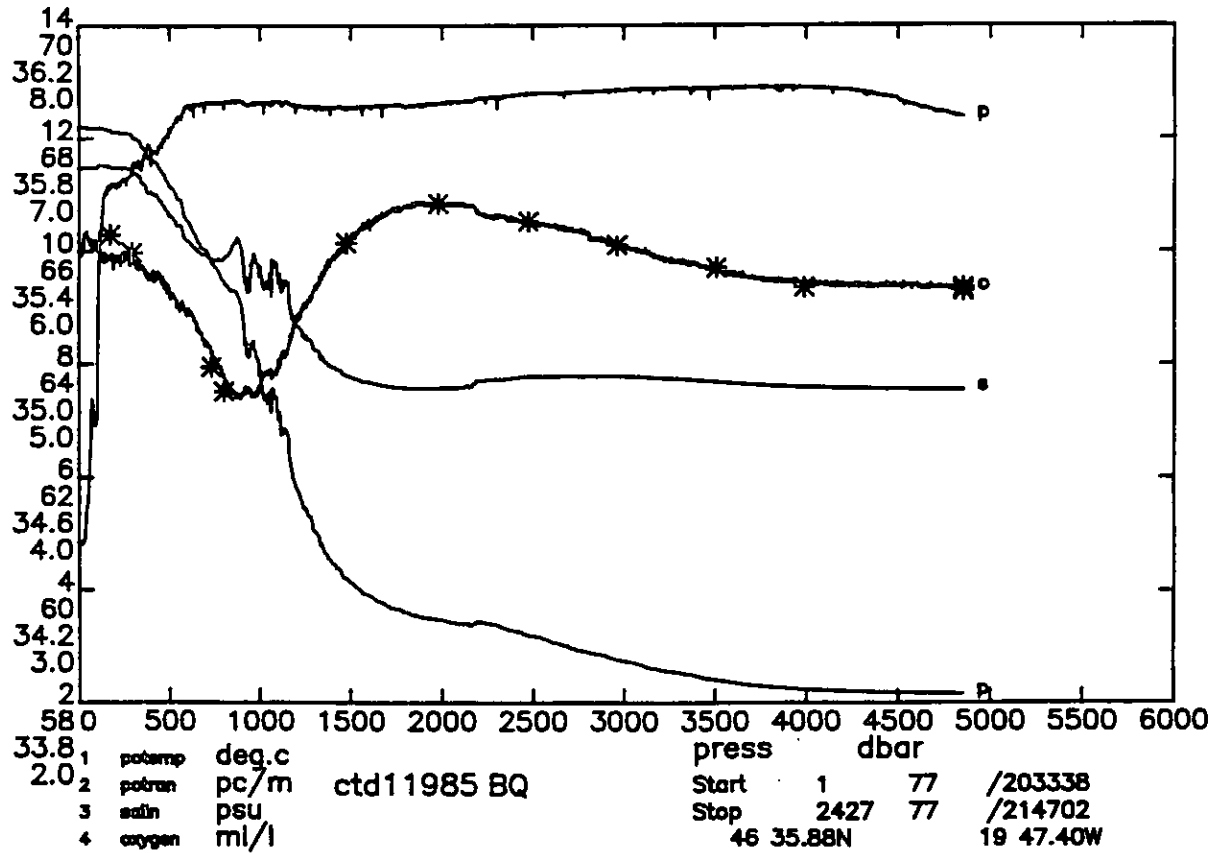
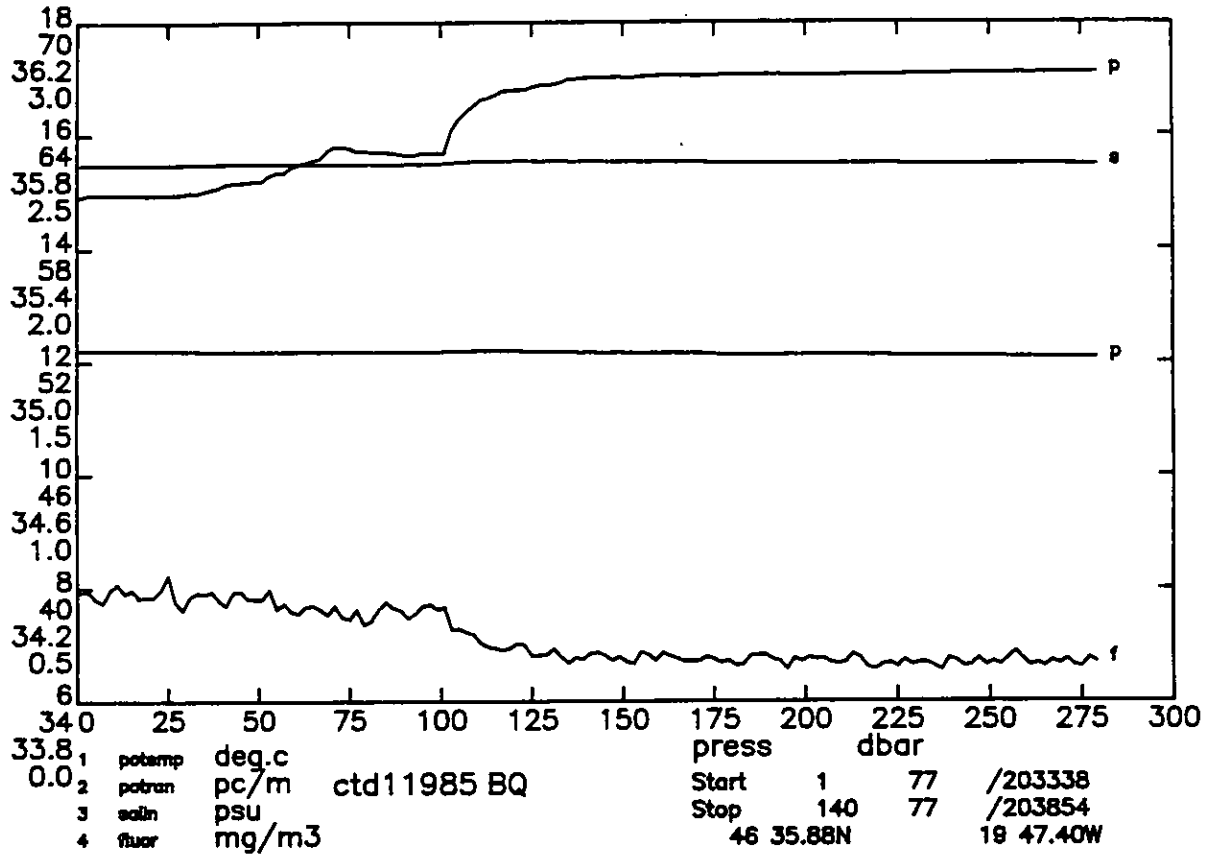


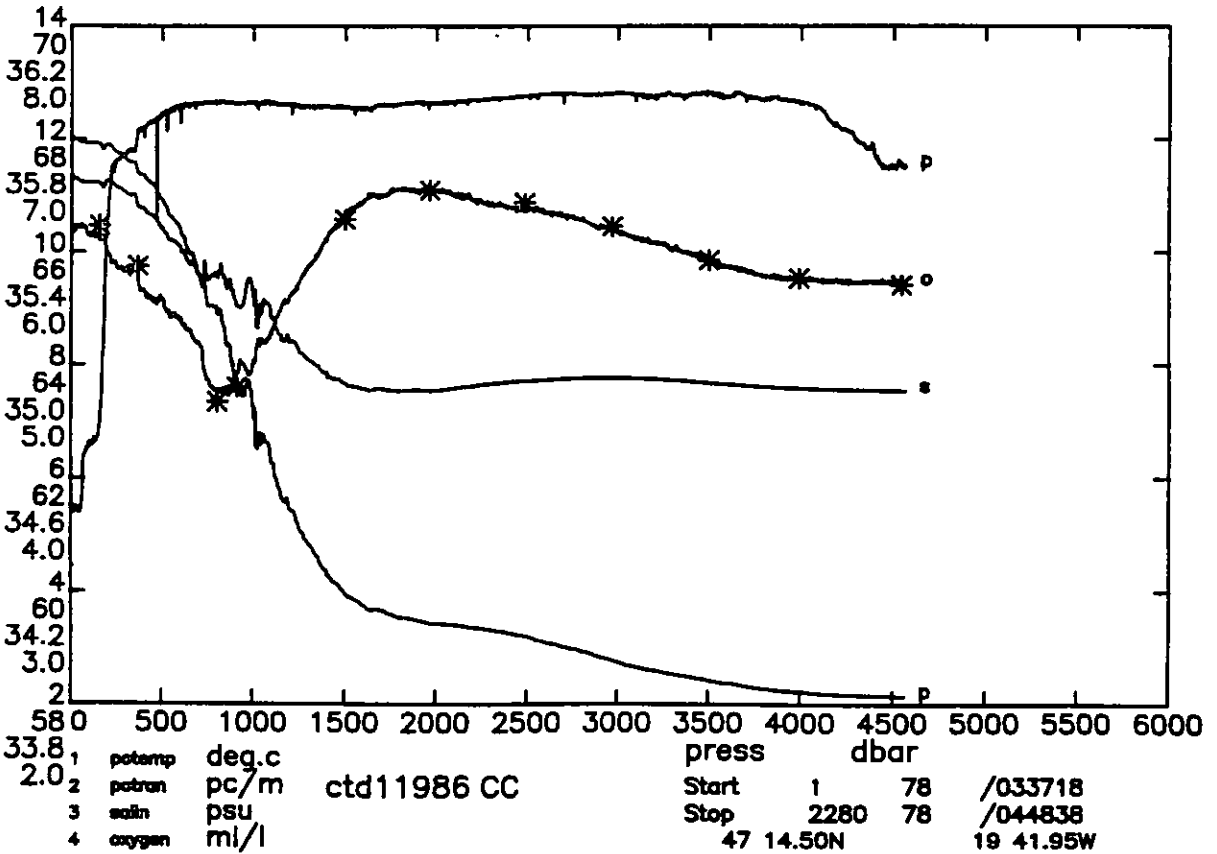
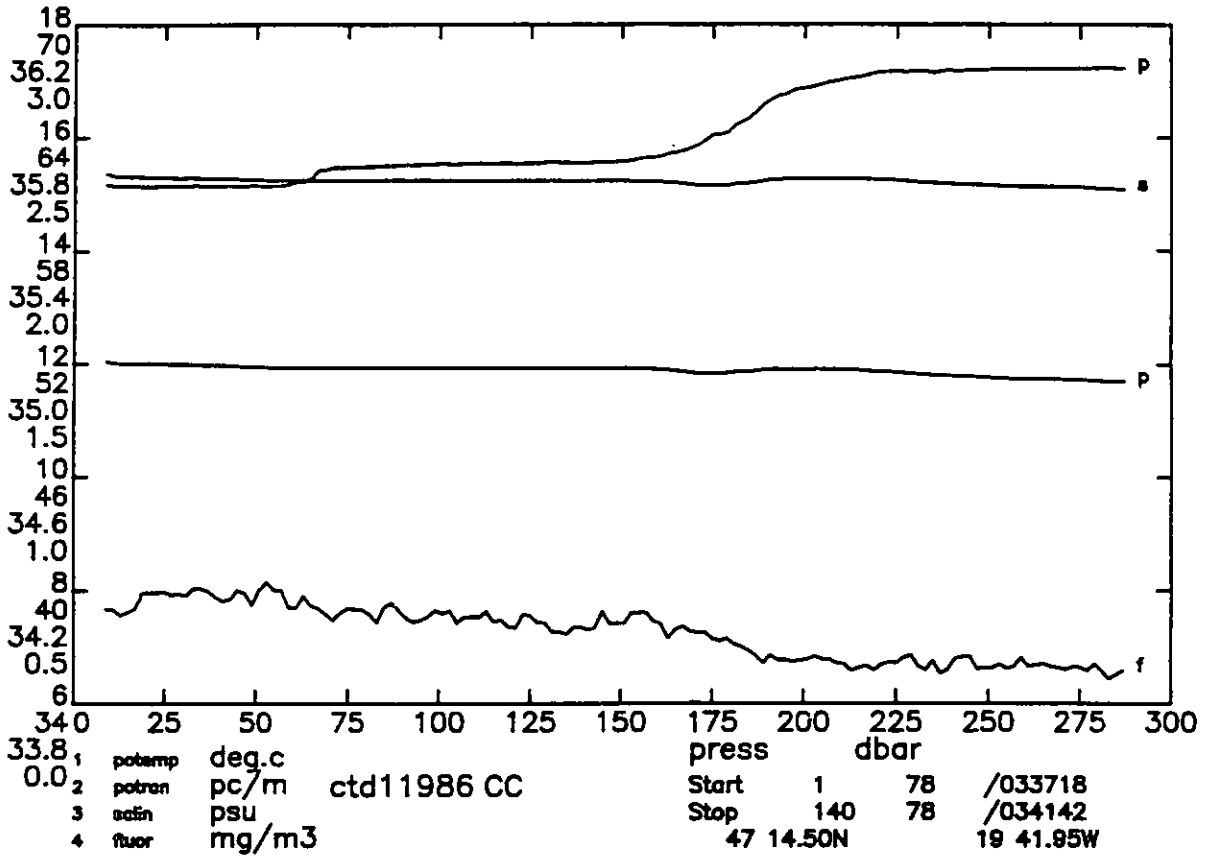


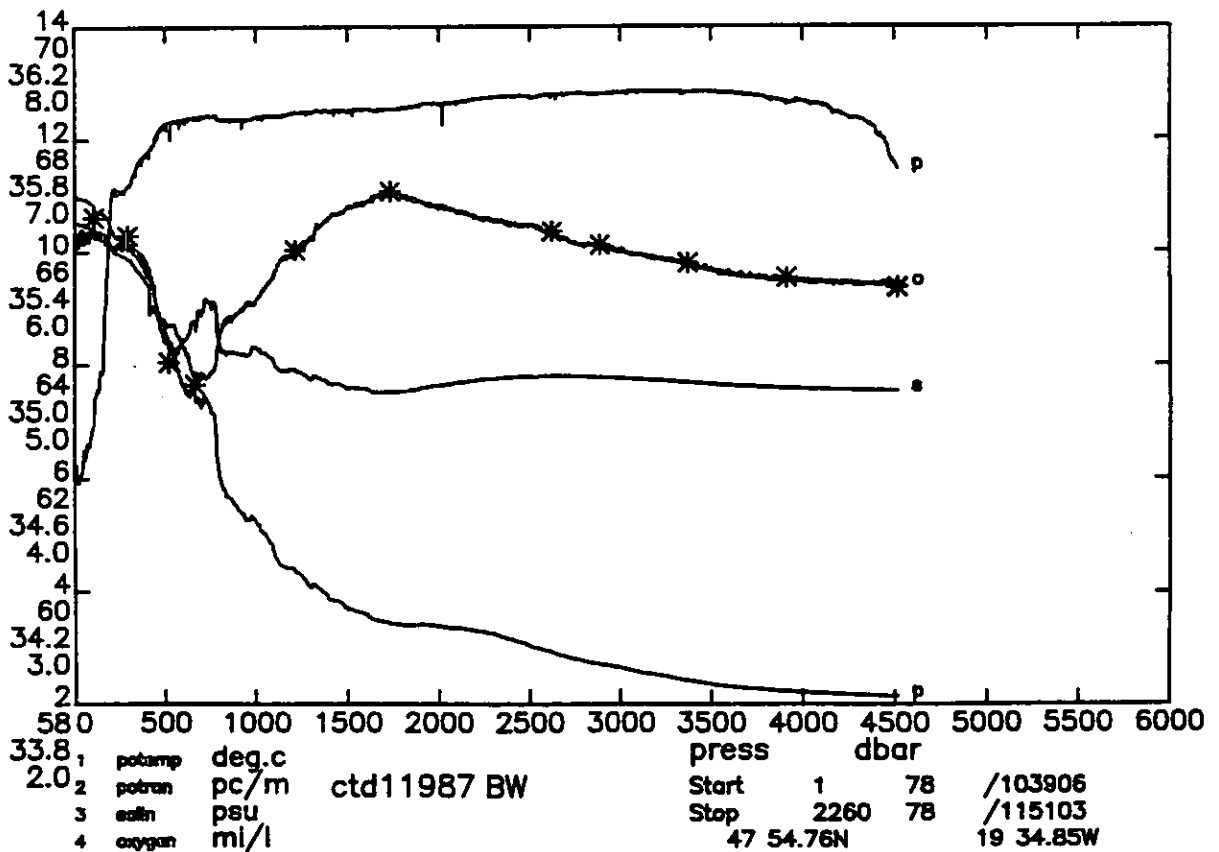
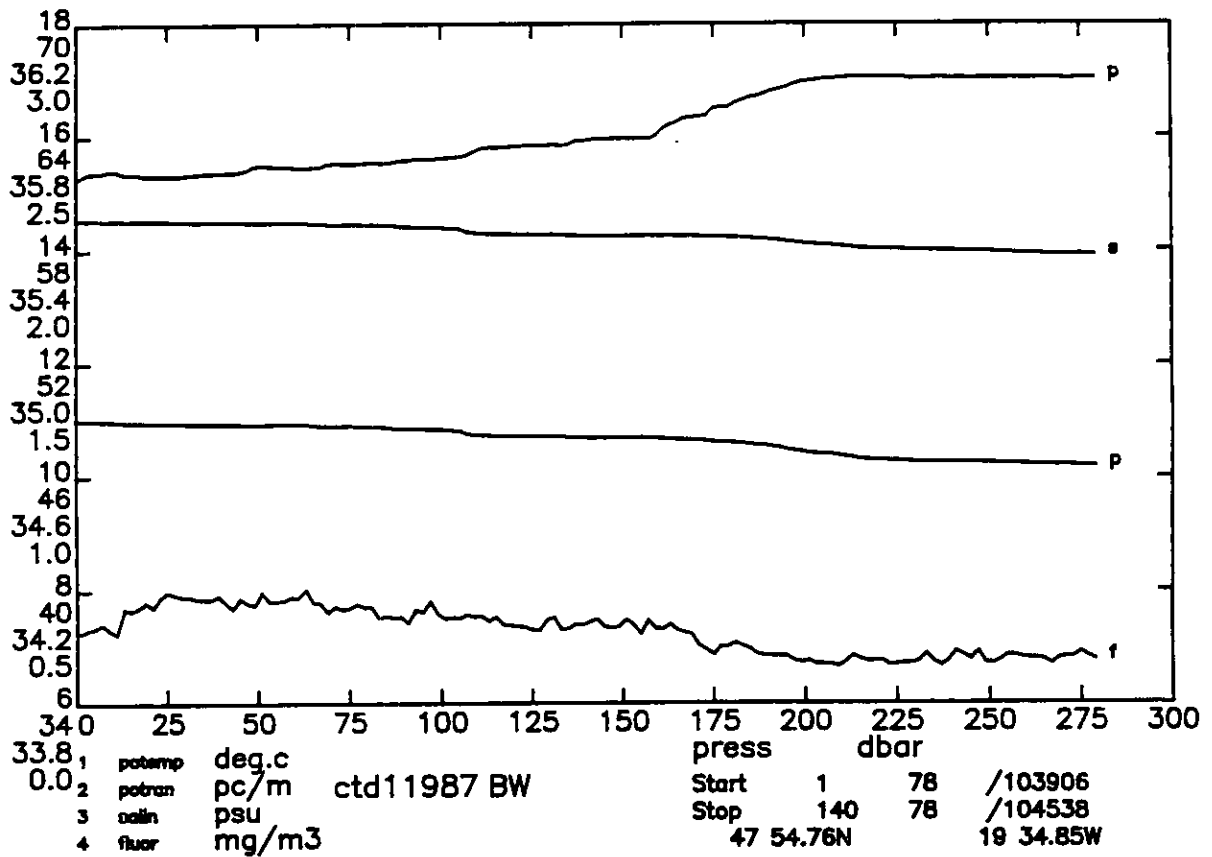


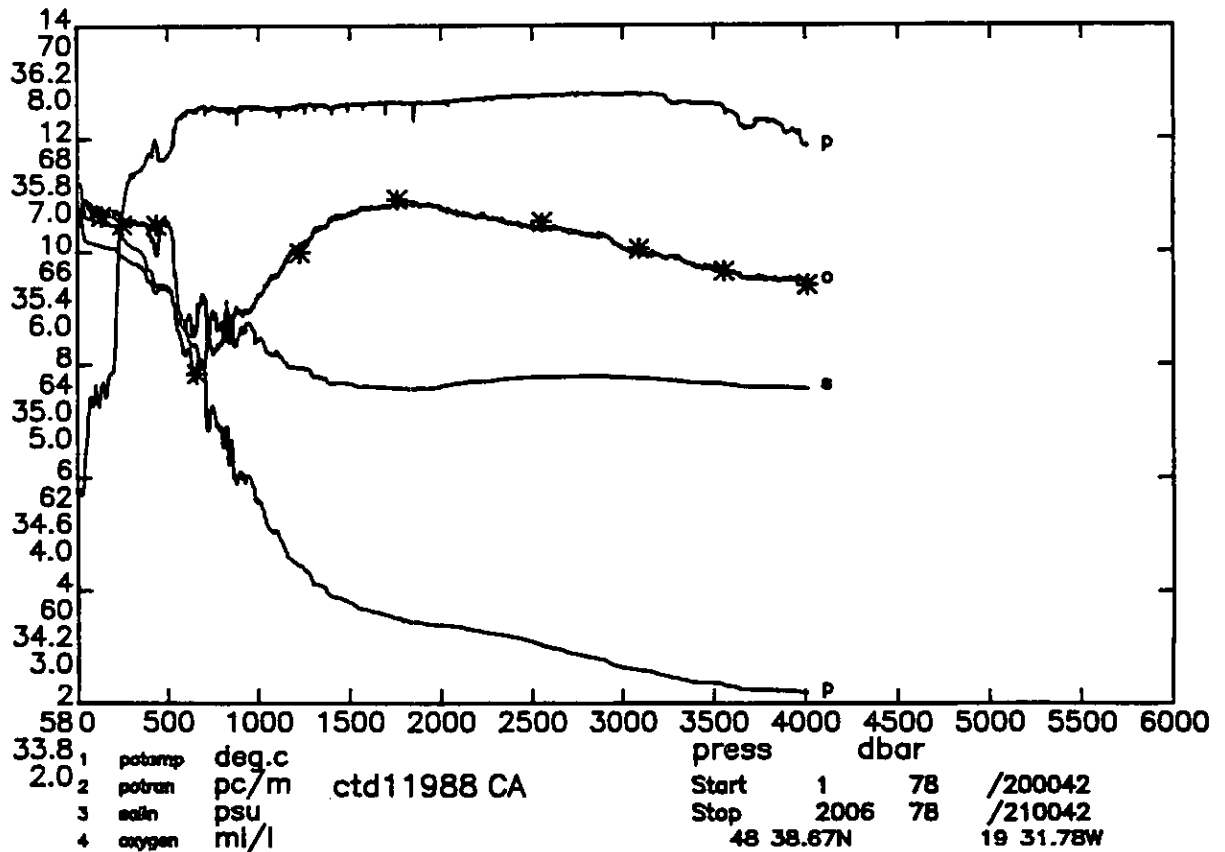
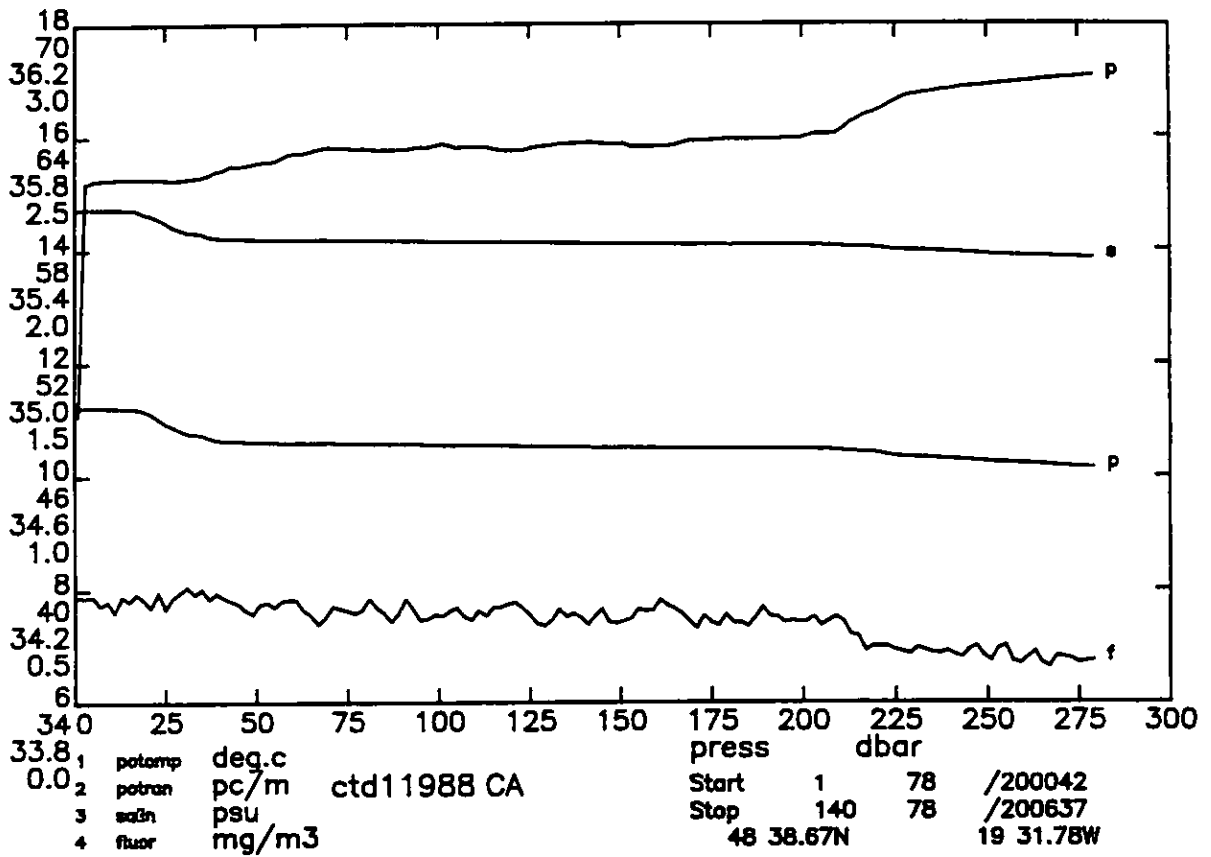


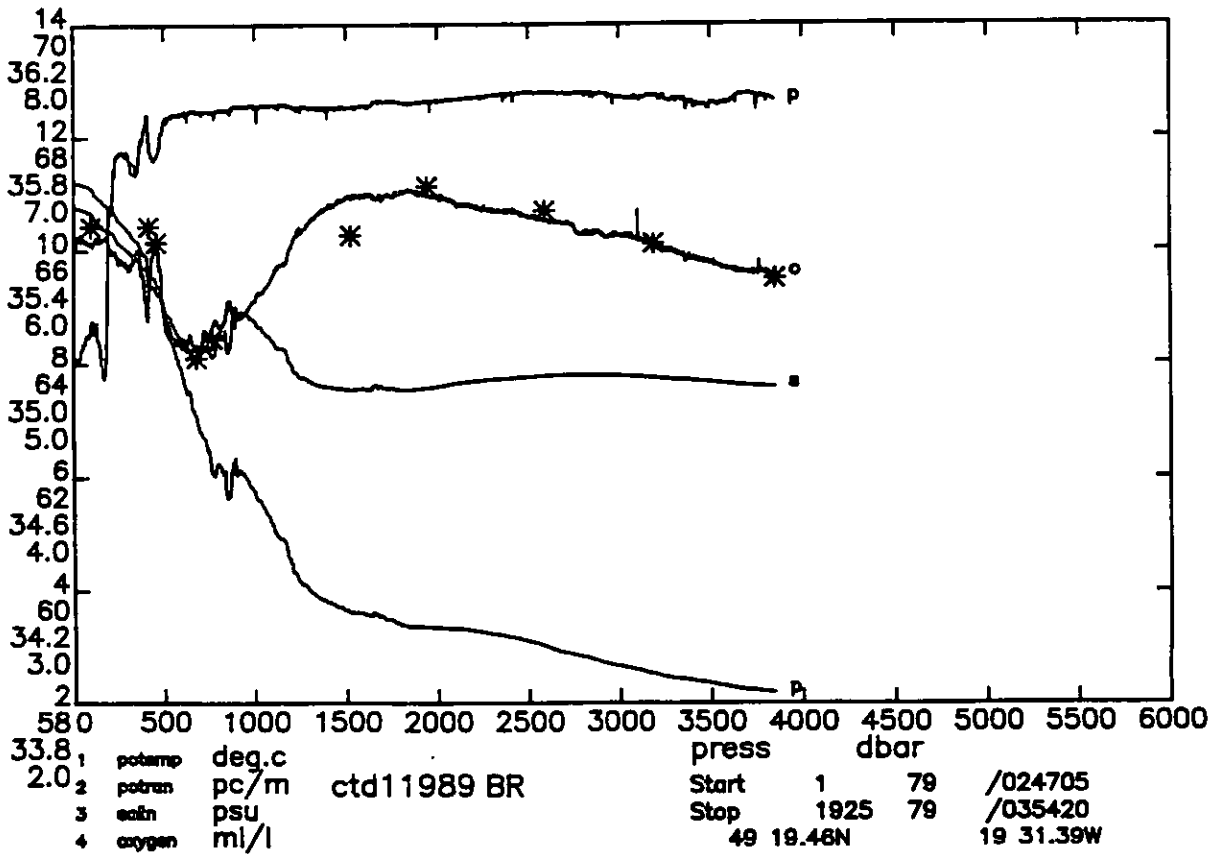
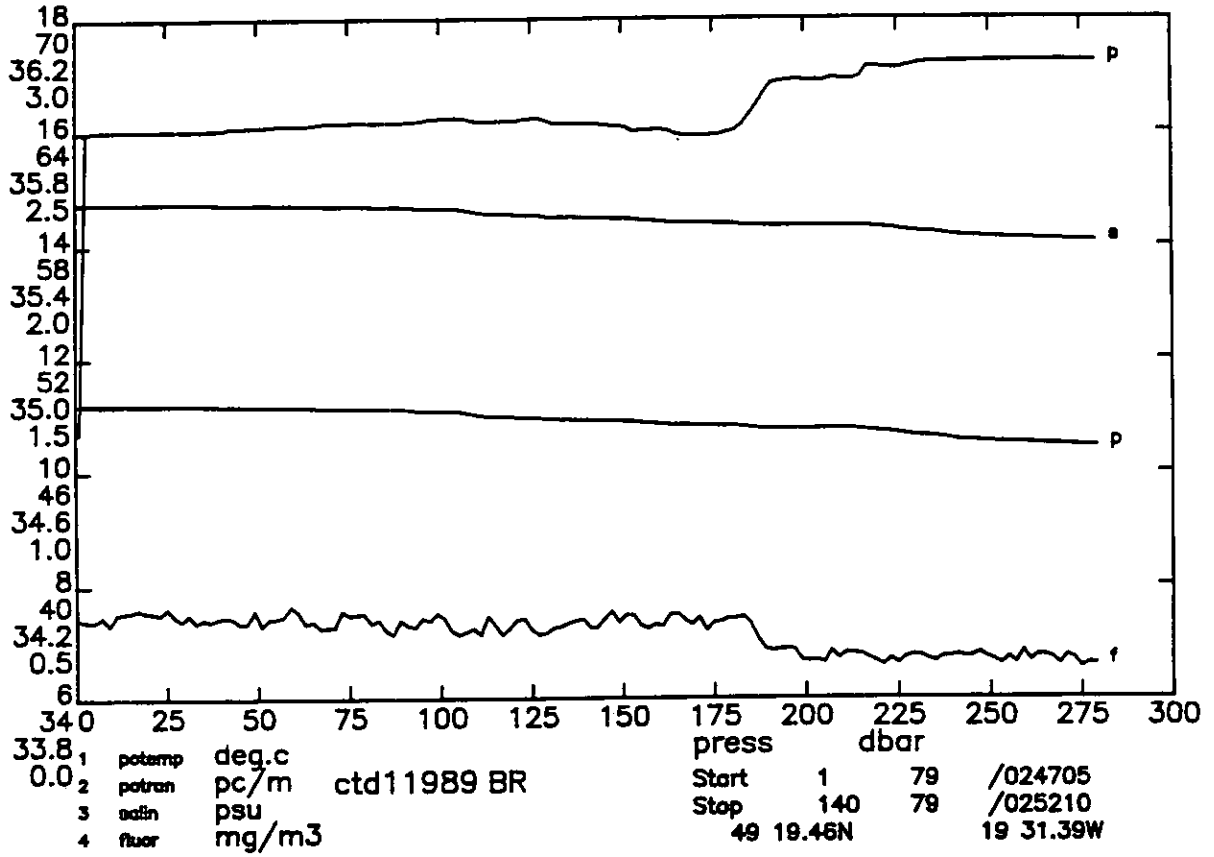


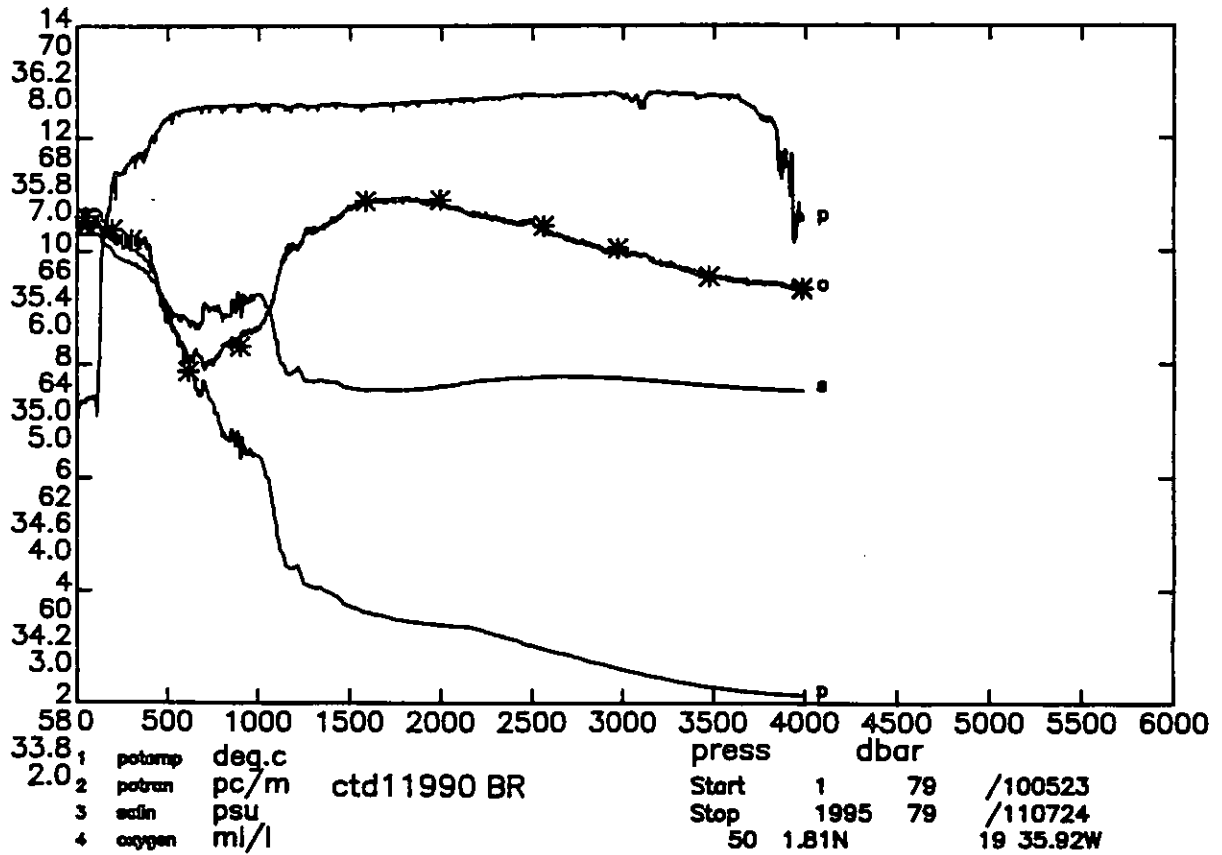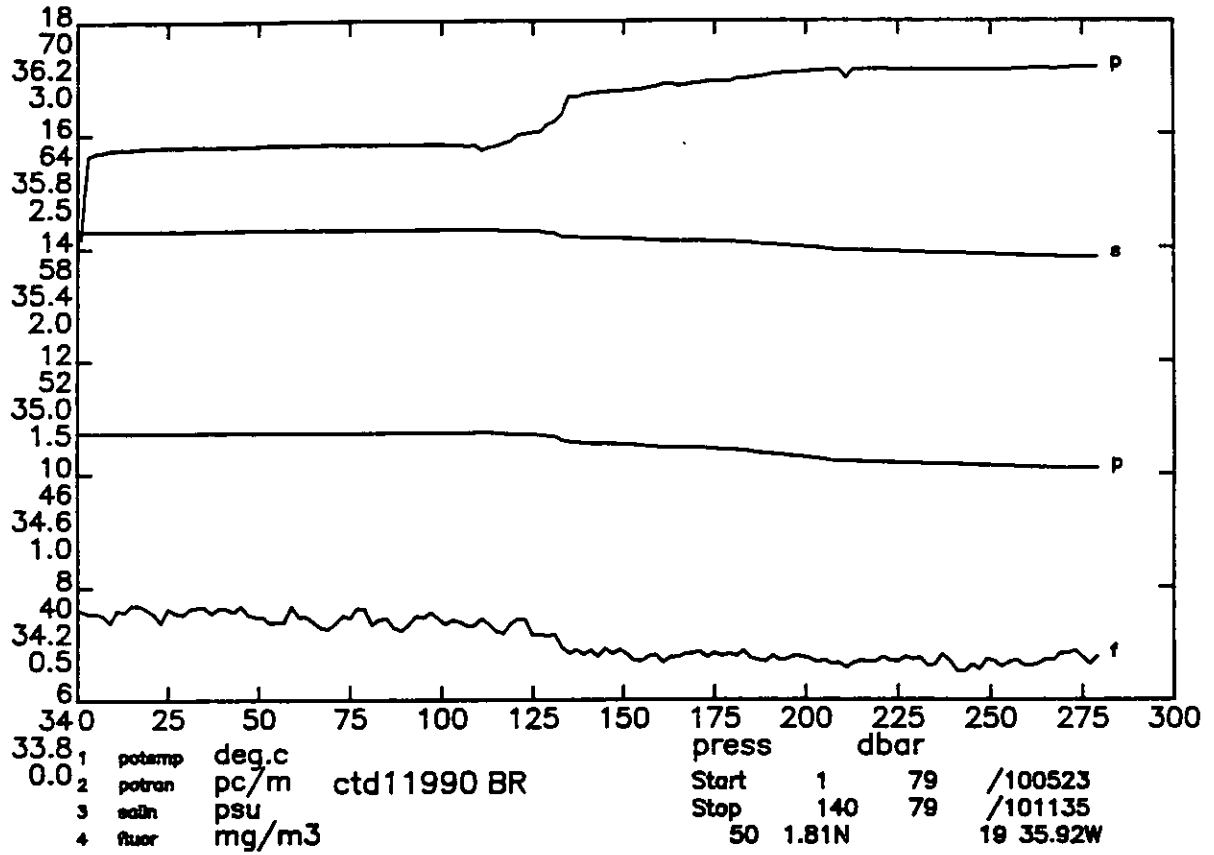

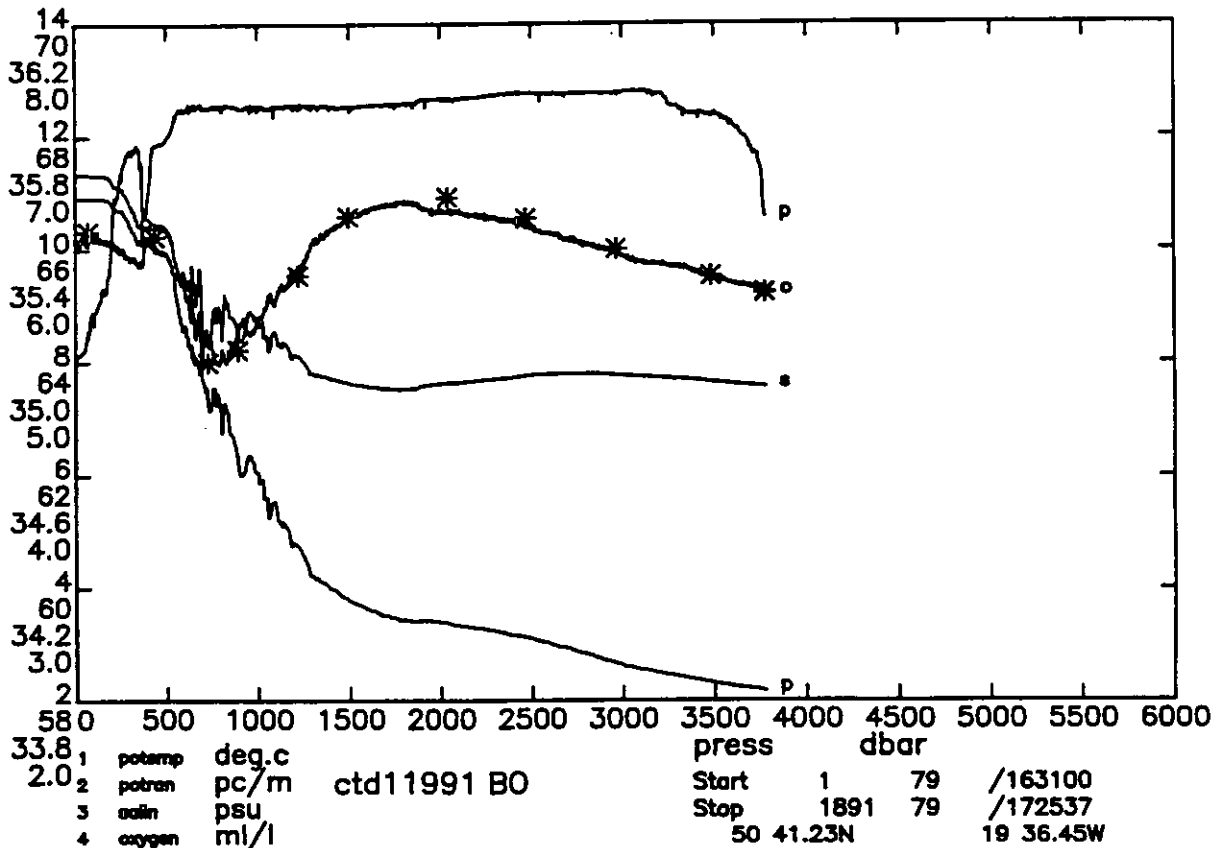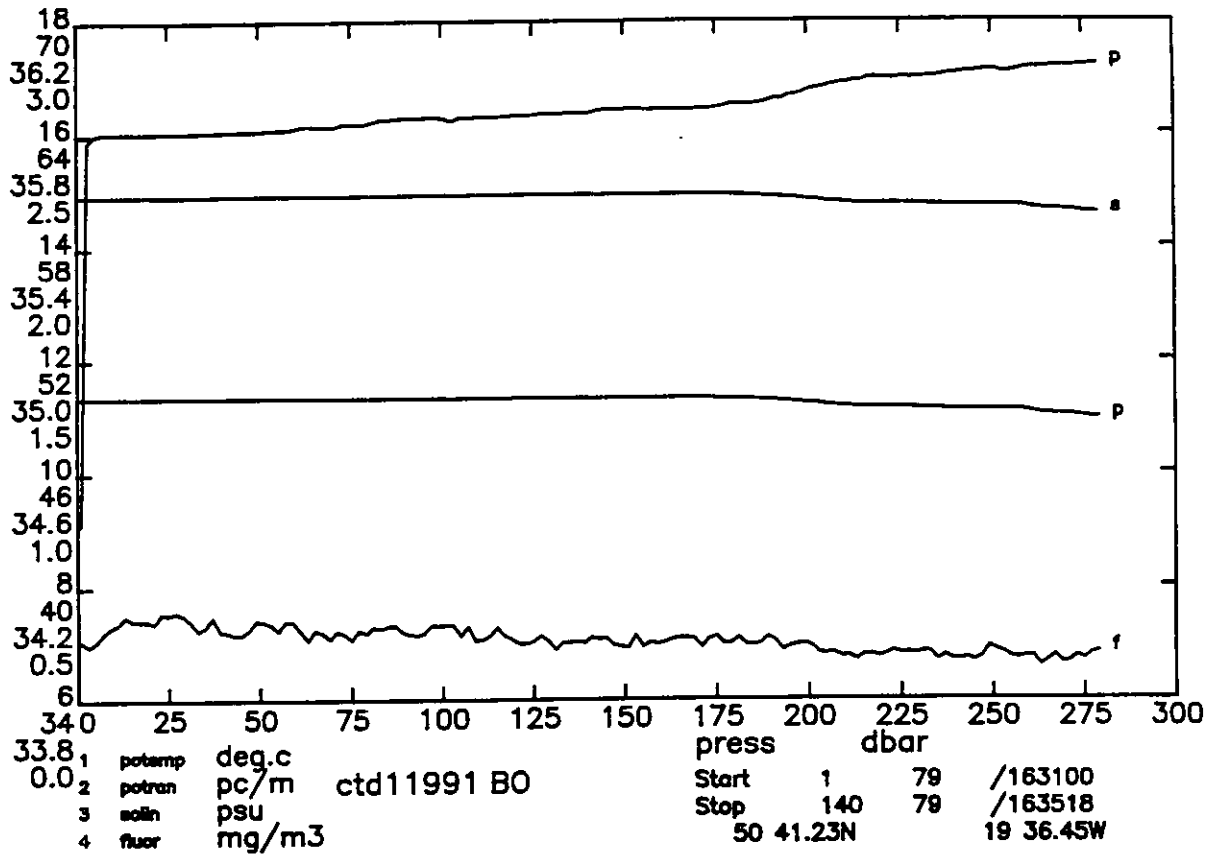

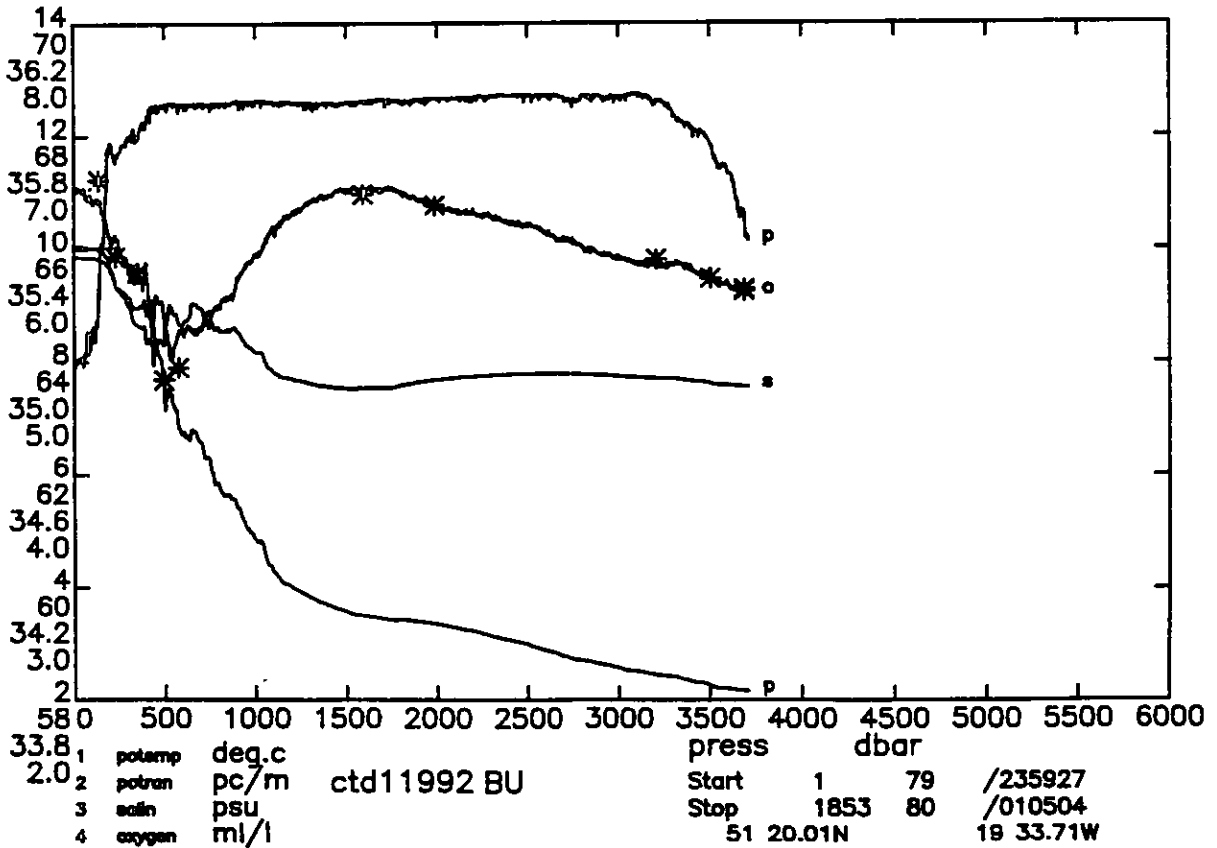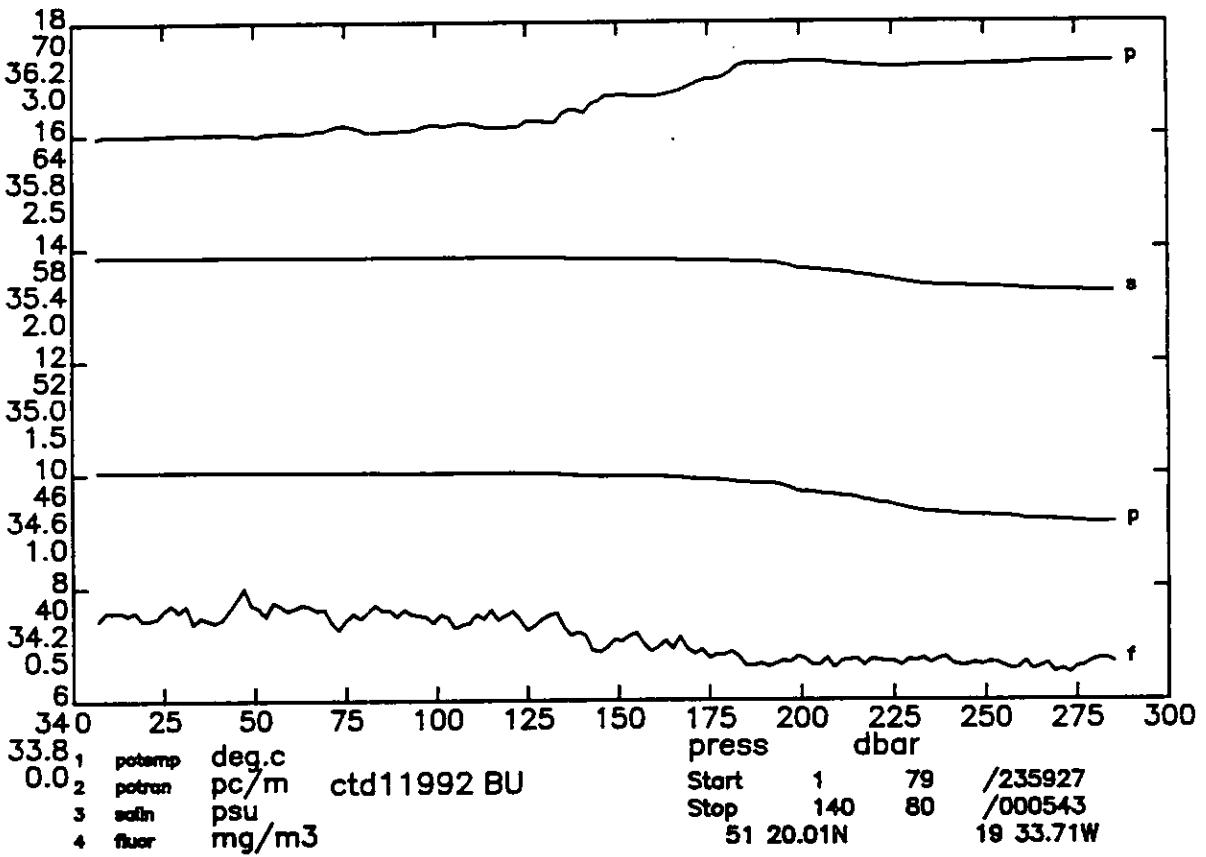

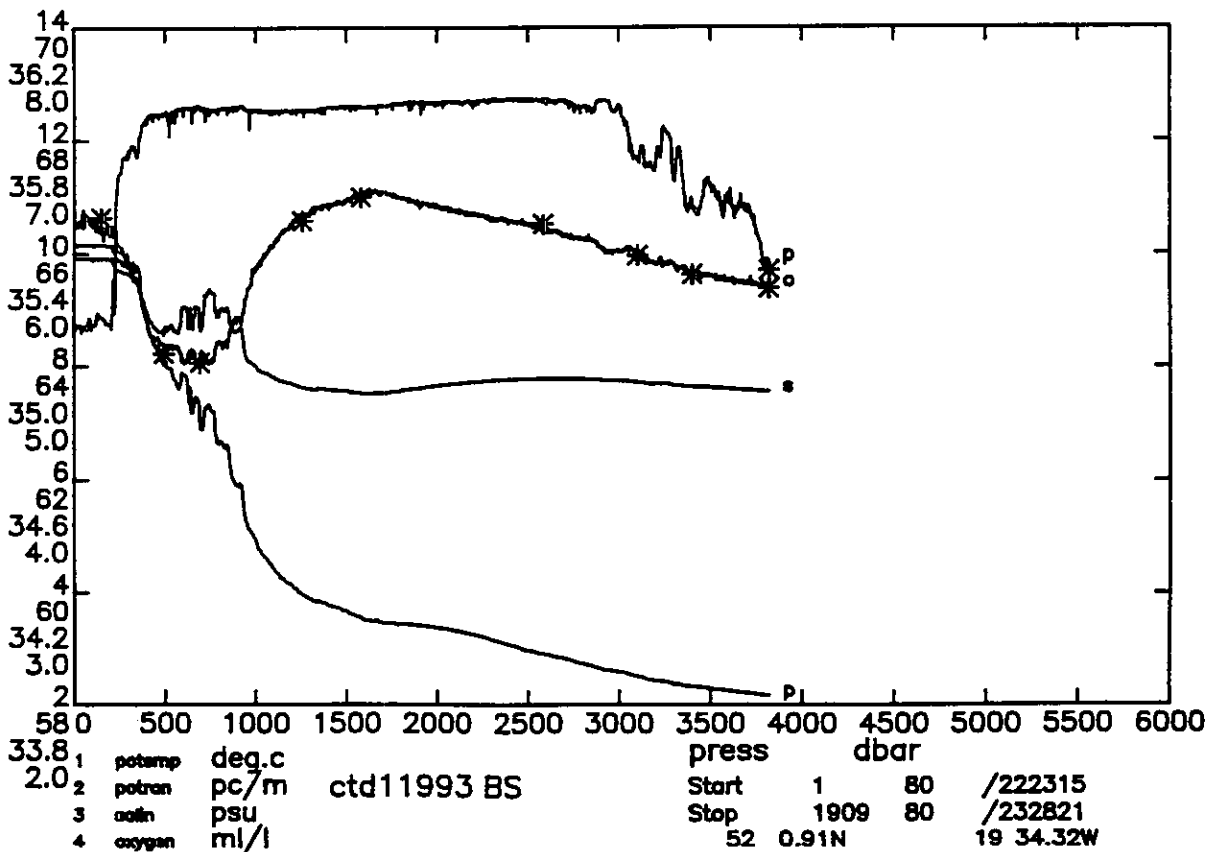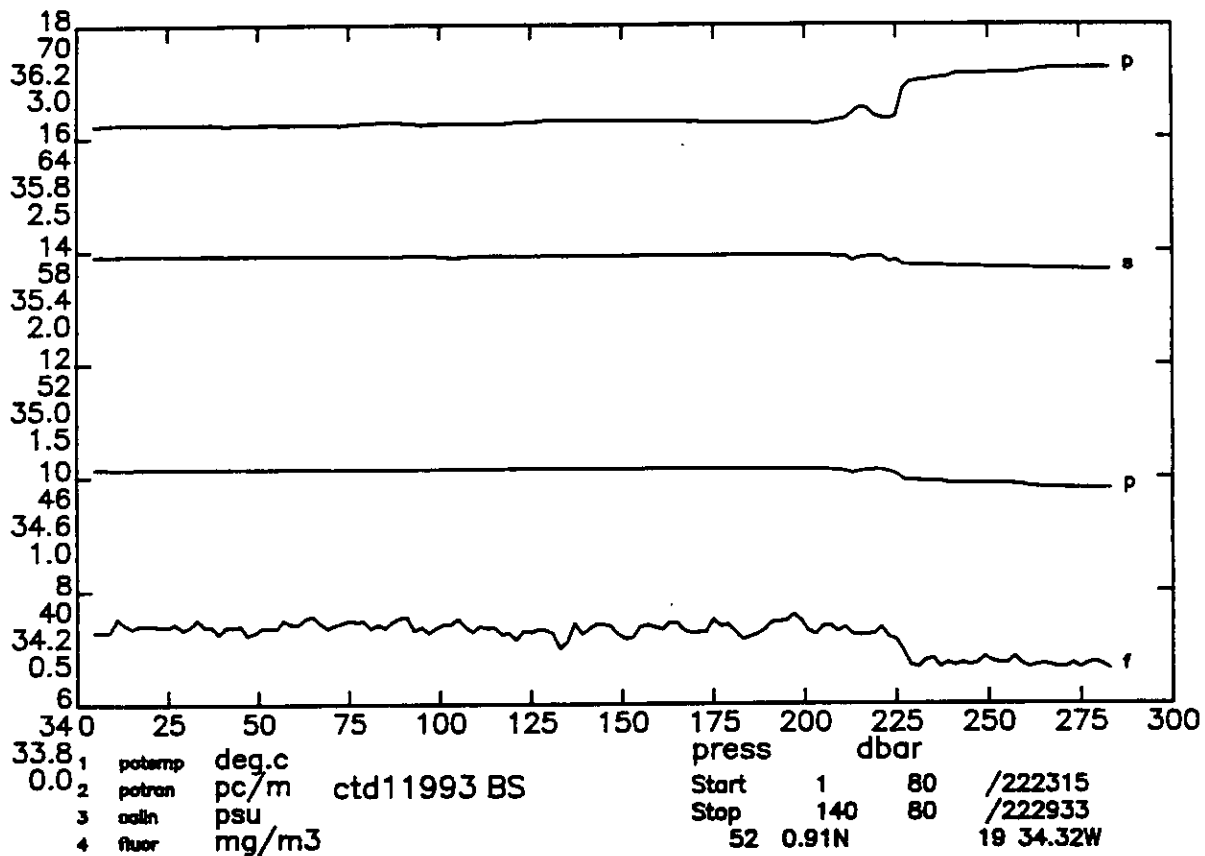

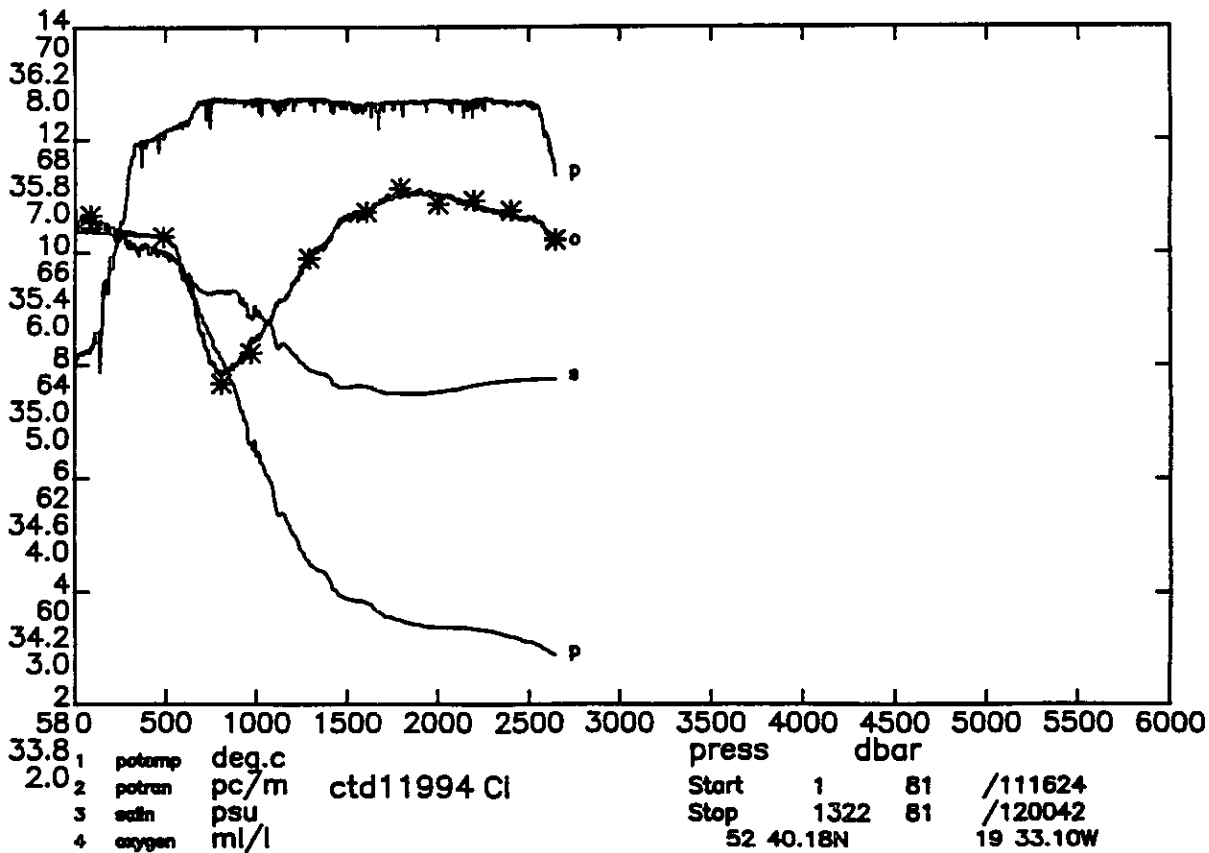
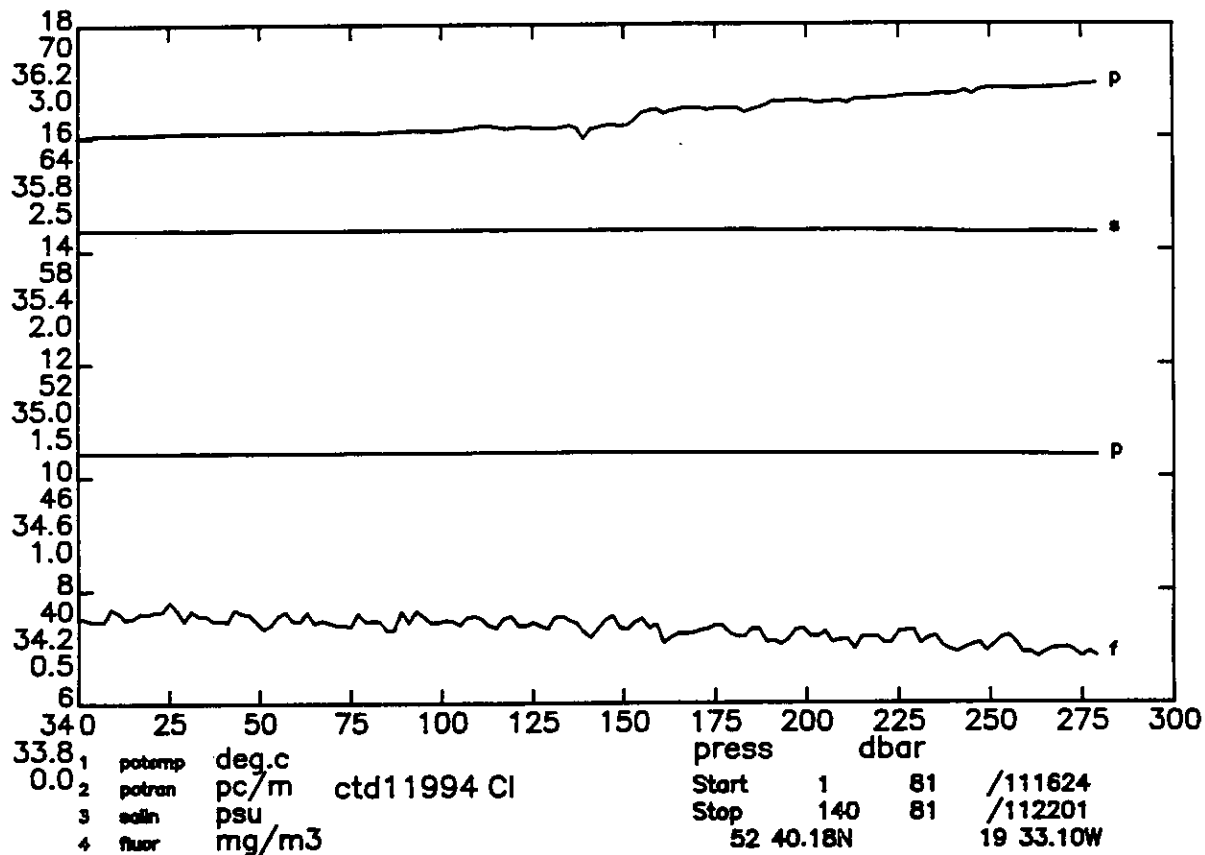




DISCOVERY CRUISE 189 STATION 11994



pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	andv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	10.428	35.473	6.25	10.427	64.15	0.41	27.247	36.033	44.434	0.008	1492.1	10.	81.58	-9.999
20.	10.427	35.473	6.25	10.425	64.17	0.40	27.247	36.033	44.434	0.016	1492.3	20.	81.83	0.124
30.	10.430	35.472	6.28	10.427	64.22	0.39	27.246	36.032	44.433	0.025	1492.4	30.	82.18	-0.600
40.	10.432	35.472	6.30	10.428	64.20	0.36	27.246	36.032	44.433	0.033	1492.6	40.	82.45	-0.264
50.	10.433	35.472	6.30	10.427	64.21	0.35	27.246	36.032	44.433	0.041	1492.8	50.	82.68	0.243
60.	10.433	35.472	6.31	10.426	64.26	0.36	27.246	36.032	44.433	0.049	1492.9	59.	82.93	0.111
70.	10.435	35.471	6.29	10.427	64.24	0.35	27.246	36.032	44.433	0.058	1493.1	69.	83.23	-0.415
80.	10.438	35.471	6.24	10.429	64.22	0.36	27.245	36.031	44.432	0.066	1493.3	79.	83.51	-0.317
90.	10.441	35.472	6.28	10.430	64.32	0.38	27.245	36.031	44.432	0.074	1493.5	89.	83.75	0.108
100.	10.442	35.471	6.29	10.430	64.32	0.36	27.245	36.031	44.432	0.083	1493.6	99.	84.04	-0.354
120.	10.446	35.471	6.22	10.432	64.48	0.37	27.244	36.030	44.431	0.100	1494.0	119.	84.60	-0.317
140.	10.449	35.470	6.28	10.432	64.14	0.30	27.244	36.030	44.430	0.117	1494.3	139.	85.14	-0.267
160.	10.442	35.470	6.26	10.423	65.33	0.31	27.246	36.032	44.433	0.134	1494.6	159.	85.48	0.503
180.	10.443	35.470	6.25	10.421	65.51	0.30	27.246	36.032	44.433	0.151	1494.9	178.	85.97	0.086
200.	10.435	35.468	6.22	10.411	65.88	0.31	27.246	36.032	44.434	0.168	1495.2	198.	86.46	0.150
220.	10.432	35.466	6.14	10.405	66.02	0.28	27.246	36.033	44.434	0.185	1495.6	218.	86.96	-0.125
240.	10.422	35.463	6.11	10.393	66.23	0.23	27.245	36.033	44.435	0.203	1495.9	238.	87.47	-0.137
260.	10.414	35.463	6.13	10.383	66.54	0.23	27.247	36.035	44.437	0.220	1496.2	258.	87.82	0.479
280.	10.404	35.462	6.08	10.371	66.84	0.22	27.248	36.036	44.440	0.238	1496.4	277.	88.19	0.458
300.	10.407	35.464	6.08	10.371	67.48	0.21	27.250	36.038	44.441	0.256	1496.8	297.	88.50	0.551
350.	10.365	35.459	5.98	10.323	67.94	0.16	27.255	36.045	44.450	0.300	1497.5	347.	89.24	0.570
400.	10.367	35.461	6.07	10.319	67.98	0.15	27.256	36.047	44.452	0.345	1498.3	396.	90.30	0.334
450.	10.353	35.458	6.02	10.298	68.07	0.15	27.258	36.050	44.455	0.390	1499.1	446.	91.36	0.328
500.	10.304	35.448	6.00	10.244	68.17	0.15	27.260	36.054	44.462	0.436	1499.7	495.	92.36	0.378
550.	10.182	35.423	5.93	10.116	68.23	0.16	27.263	36.062	44.476	0.483	1500.1	544.	93.13	0.539
600.	9.720	35.337	5.80	9.650	68.28	0.15	27.275	36.095	44.529	0.529	1499.1	594.	92.57	1.075
650.	9.297	35.287	5.67	9.223	68.52	0.15	27.307	36.147	44.598	0.575	1498.4	643.	90.08	1.557
700.	8.922	35.265	5.27	8.844	68.67	0.18	27.351	36.208	44.674	0.619	1497.8	693.	86.48	1.772
750.	8.573	35.254	5.03	8.491	68.63	0.19	27.398	36.271	44.752	0.661	1497.3	742.	82.52	1.832
800.	8.227	35.260	4.93	8.141	68.72	0.17	27.457	36.345	44.841	0.701	1496.8	791.	77.45	2.020
850.	7.848	35.256	4.97	7.759	68.71	0.16	27.511	36.416	44.928	0.738	1496.2	841.	72.65	1.969
900.	7.478	35.253	5.03	7.386	68.69	0.17	27.563	36.485	45.013	0.774	1495.6	890.	67.98	1.940
950.	6.878	35.189	5.14	6.785	68.69	0.18	27.598	36.549	45.104	0.807	1494.1	939.	64.31	1.750
1000.	6.507	35.179	5.24	6.412	68.66	0.12	27.641	36.609	45.181	0.838	1493.5	989.	60.28	1.806
1200.	5.125	35.041	5.72	5.021	68.70	0.14	27.706	36.744	45.381	0.951	1491.1	1186.	53.45	1.280
1300.	4.572	34.981	5.99	4.464	68.68	0.17	27.721	36.789	45.453	1.004	1490.4	1285.	51.48	1.037
1400.	4.334	34.958	6.13	4.219	68.68	0.15	27.730	36.810	45.486	1.055	1491.1	1383.	50.99	0.740
1500.	3.989	34.920	6.31	3.869	68.64	0.16	27.736	36.835	45.529	1.106	1491.2	1481.	50.15	0.798
1600.	3.929	34.926	6.36	3.801	68.58	0.14	27.748	36.850	45.547	1.155	1492.7	1580.	49.82	0.673
1700.	3.707	34.903	6.47	3.572	68.57	0.17	27.753	36.867	45.576	1.205	1493.4	1678.	49.38	0.690
1800.	3.632	34.899	6.52	3.489	68.57	0.14	27.758	36.877	45.590	1.255	1494.7	1776.	49.48	0.533
1900.	3.559	34.900	6.54	3.407	68.66	0.16	27.766	36.890	45.606	1.304	1496.1	1875.	49.24	0.623
2000.	3.520	34.907	6.51	3.359	68.69	0.15	27.776	36.902	45.621	1.353	1497.6	1973.	48.99	0.625
2100.	3.523	34.912	6.47	3.354	68.70	0.14	27.782	36.907	45.627	1.402	1499.3	2071.	49.38	0.416
2200.	3.507	34.929	6.40	3.328	68.68	0.13	27.798	36.924	45.644	1.451	1501.0	2169.	48.70	0.732
2300.	3.472	34.938	6.37	3.283	68.66	0.15	27.809	36.938	45.660	1.500	1502.5	2267.	48.34	0.653
2400.	3.392	34.946	6.32	3.195	68.66	0.13	27.824	36.957	45.684	1.548	1503.9	2365.	47.33	0.802
2500.	3.306	34.949	6.31	3.100	68.65	0.14	27.835	36.974	45.705	1.595	1505.2	2463.	46.55	0.748
2600.	3.162	34.952	6.16	2.949	68.06	0.13	27.851	36.998	45.737	1.641	1506.3	2561.	44.95	0.911



Sample data

2642.	3.076	34.951	6.11	2.860
2398.	3.394	34.945	6.37	3.197
2196.	3.510	34.928	6.46	3.331
1998.	3.519	34.904	6.43	3.359
1791.	3.633	34.898	6.57	3.490
1603.	3.925	34.924	6.36	3.796
1290.	4.613	34.986	5.95	4.506
967.	6.690	35.200	5.11	6.597
805.	8.202	35.263	4.84	8.115
486.	10.326	35.452	6.14	10.268
85.	10.440	35.471	6.33	10.430

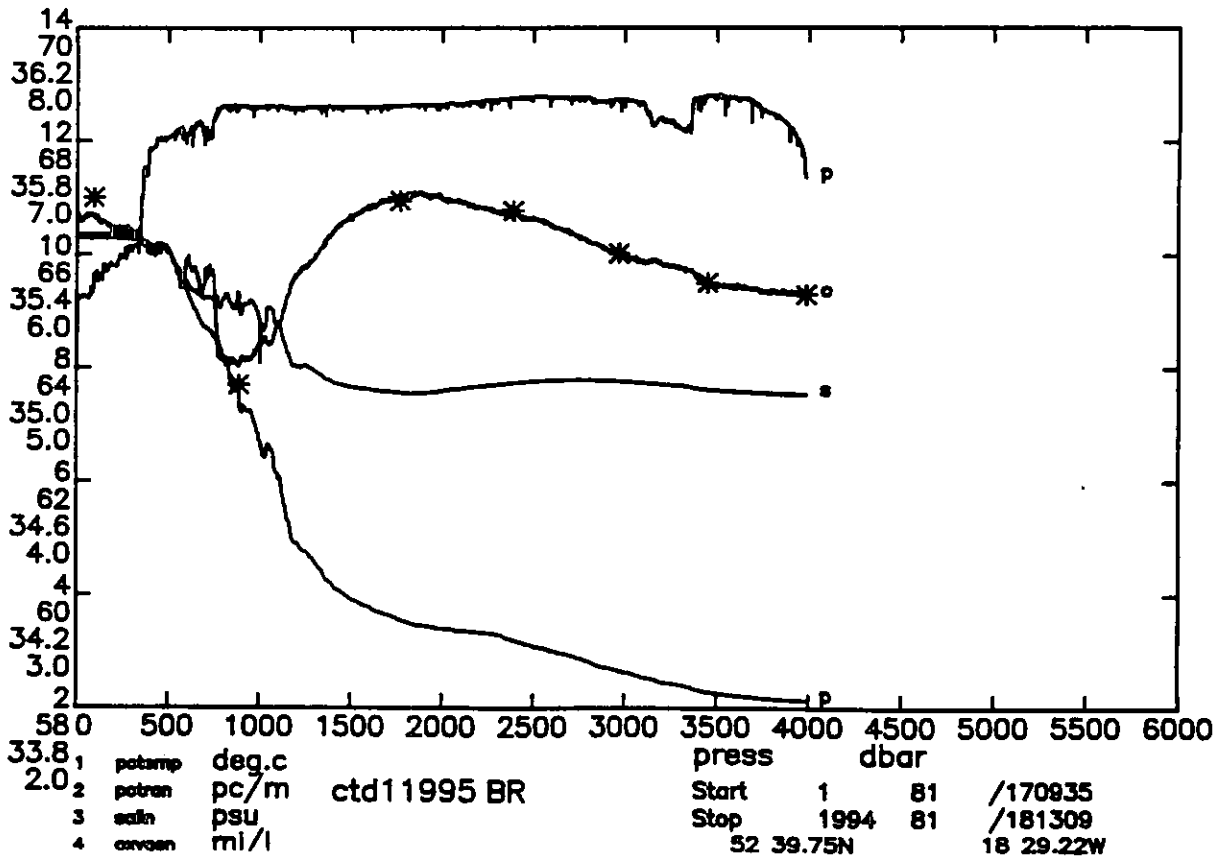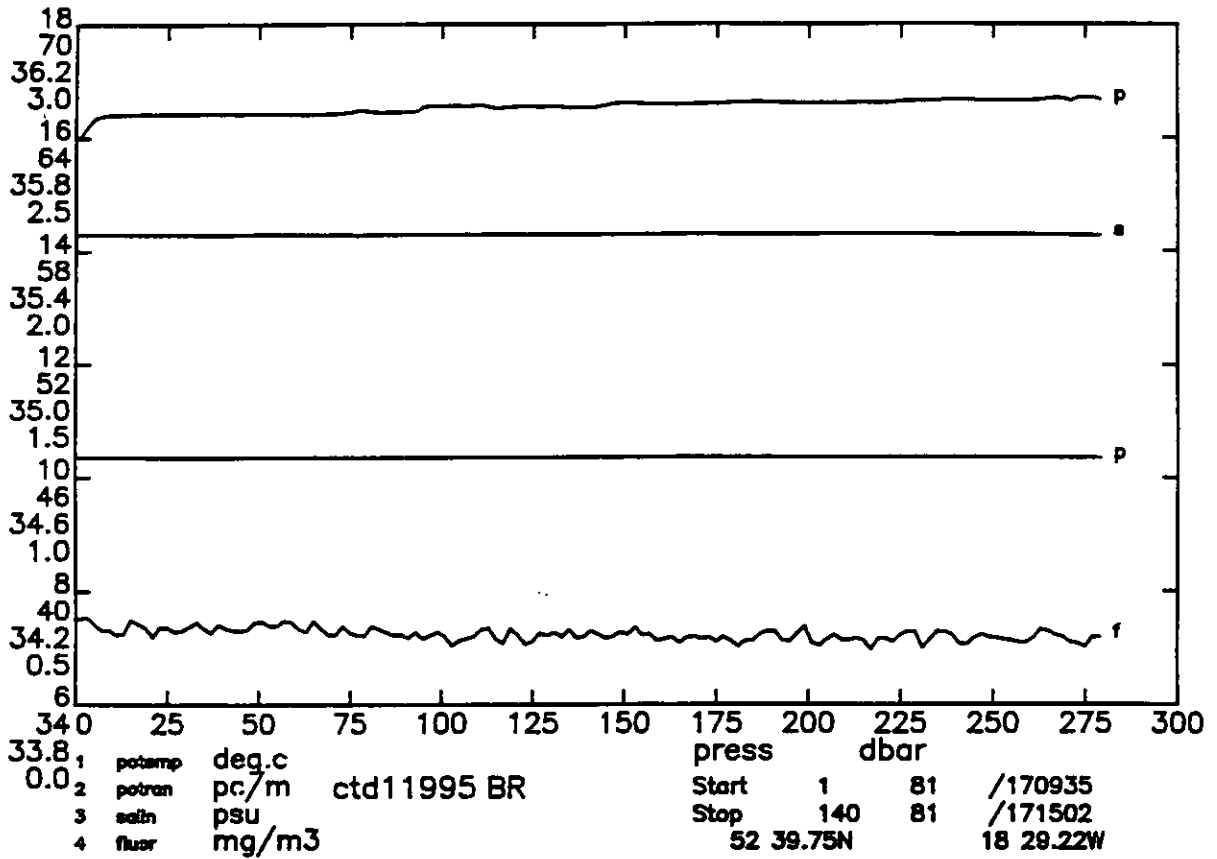

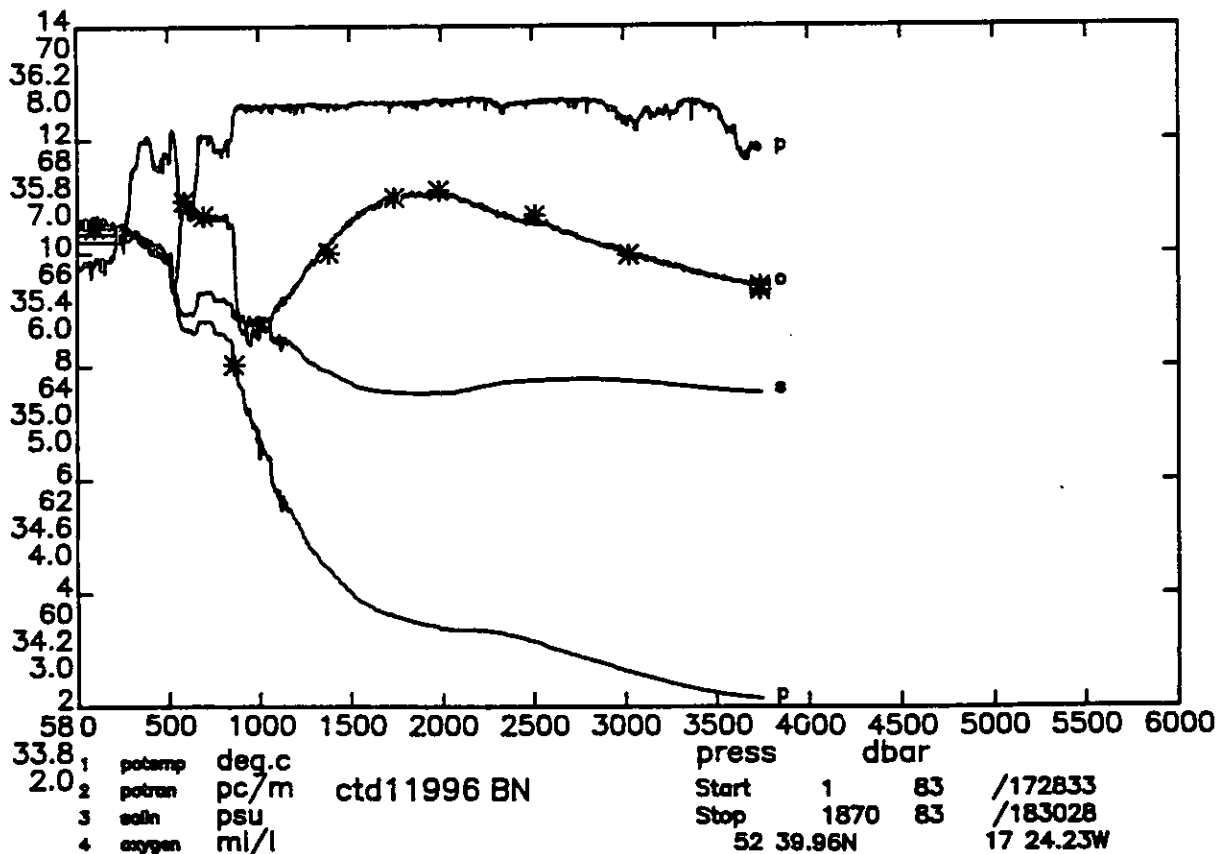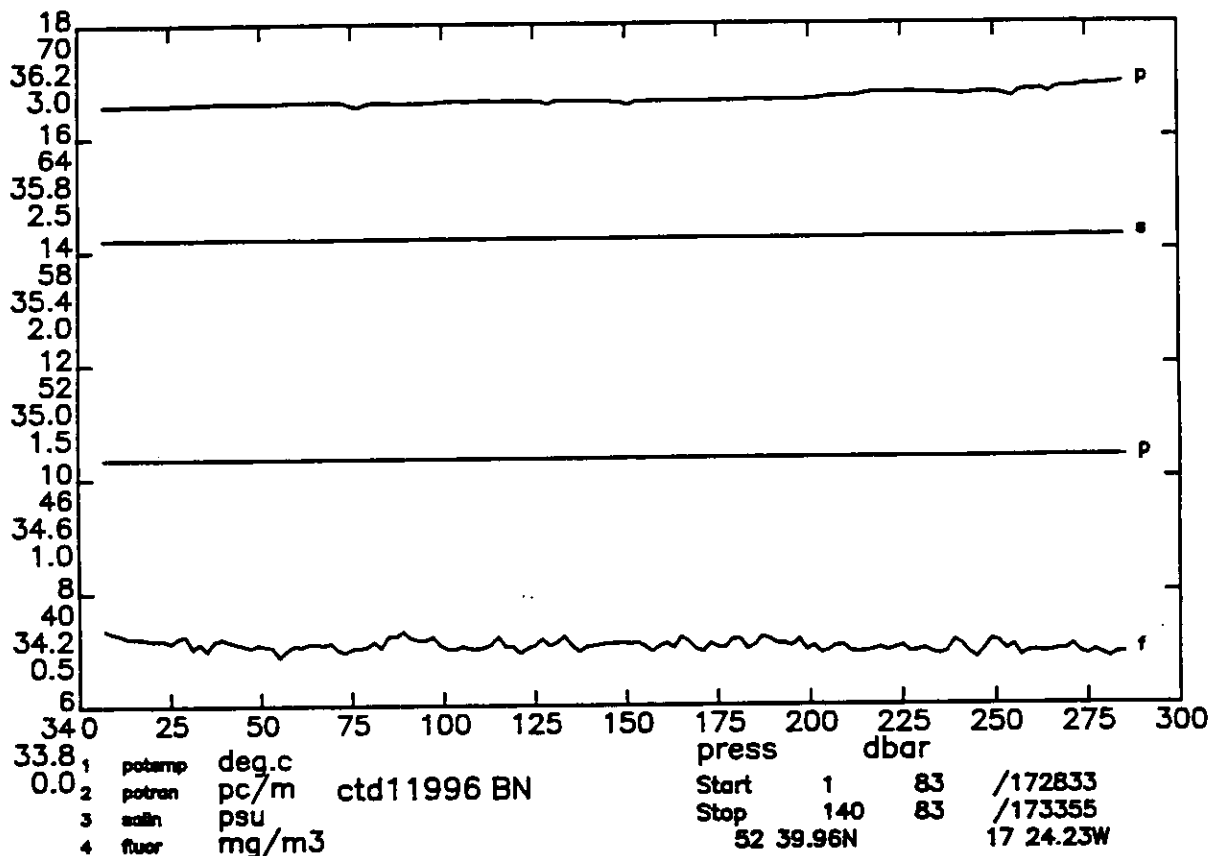

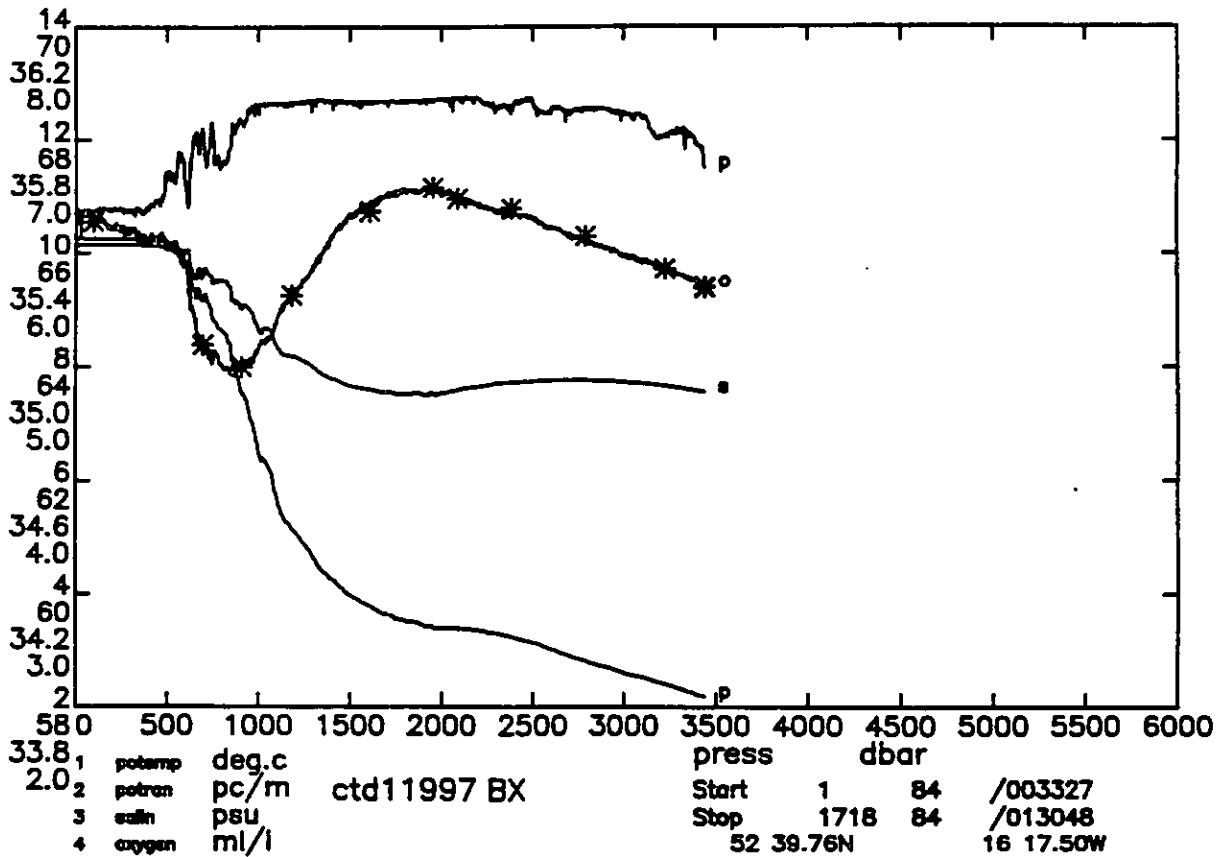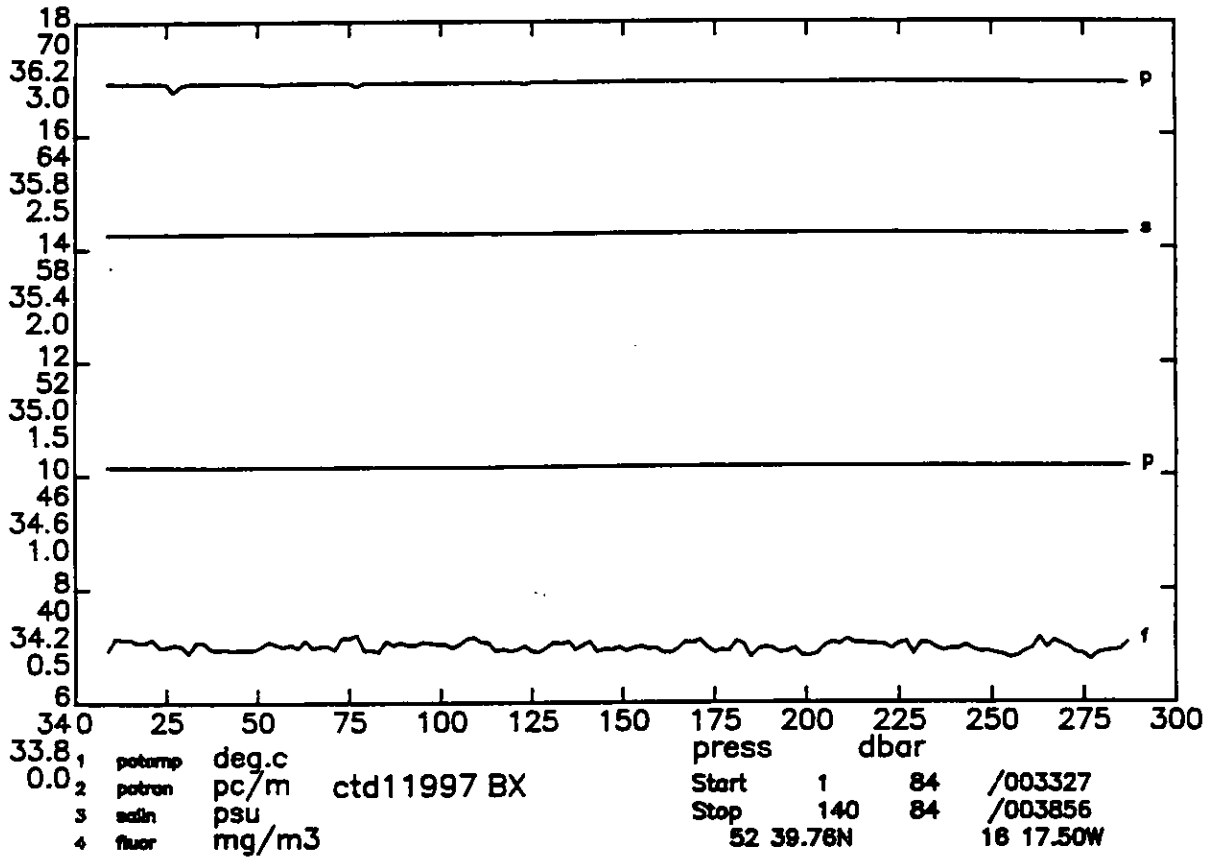

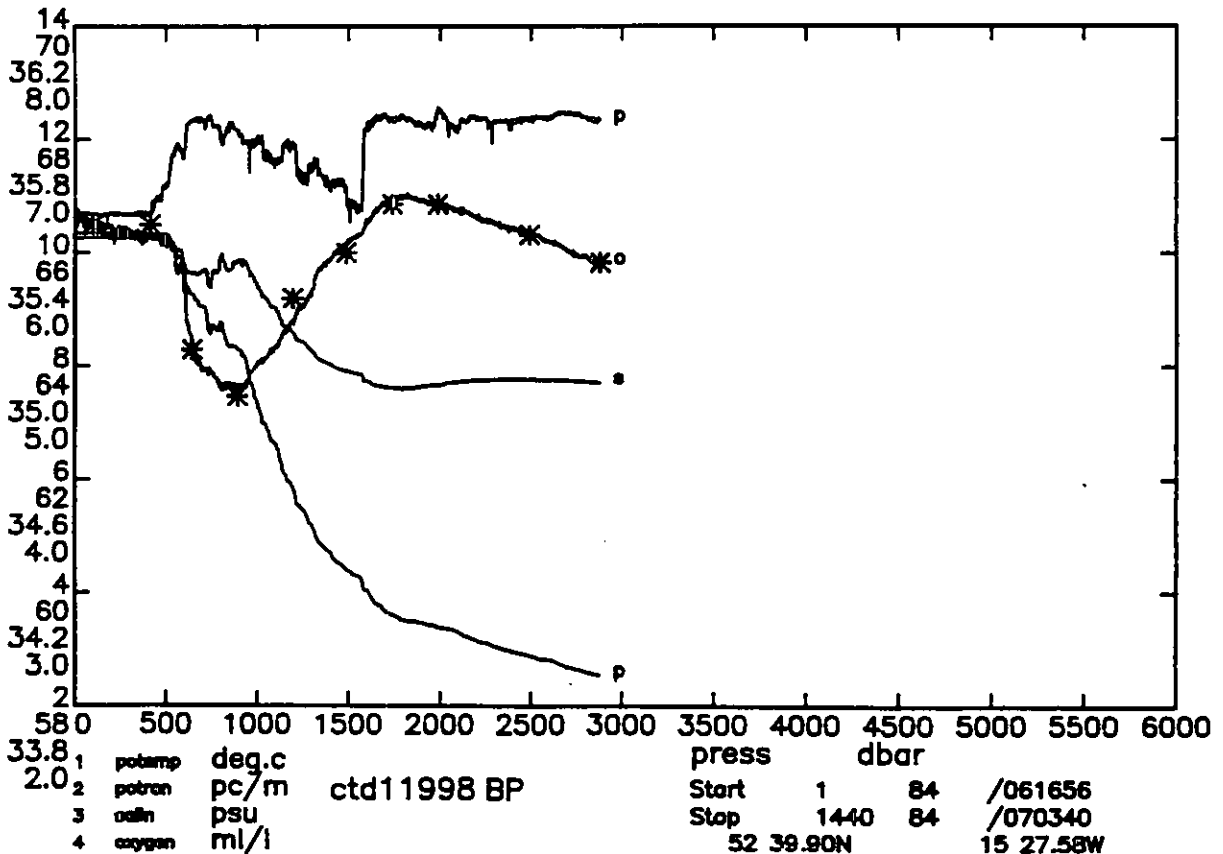
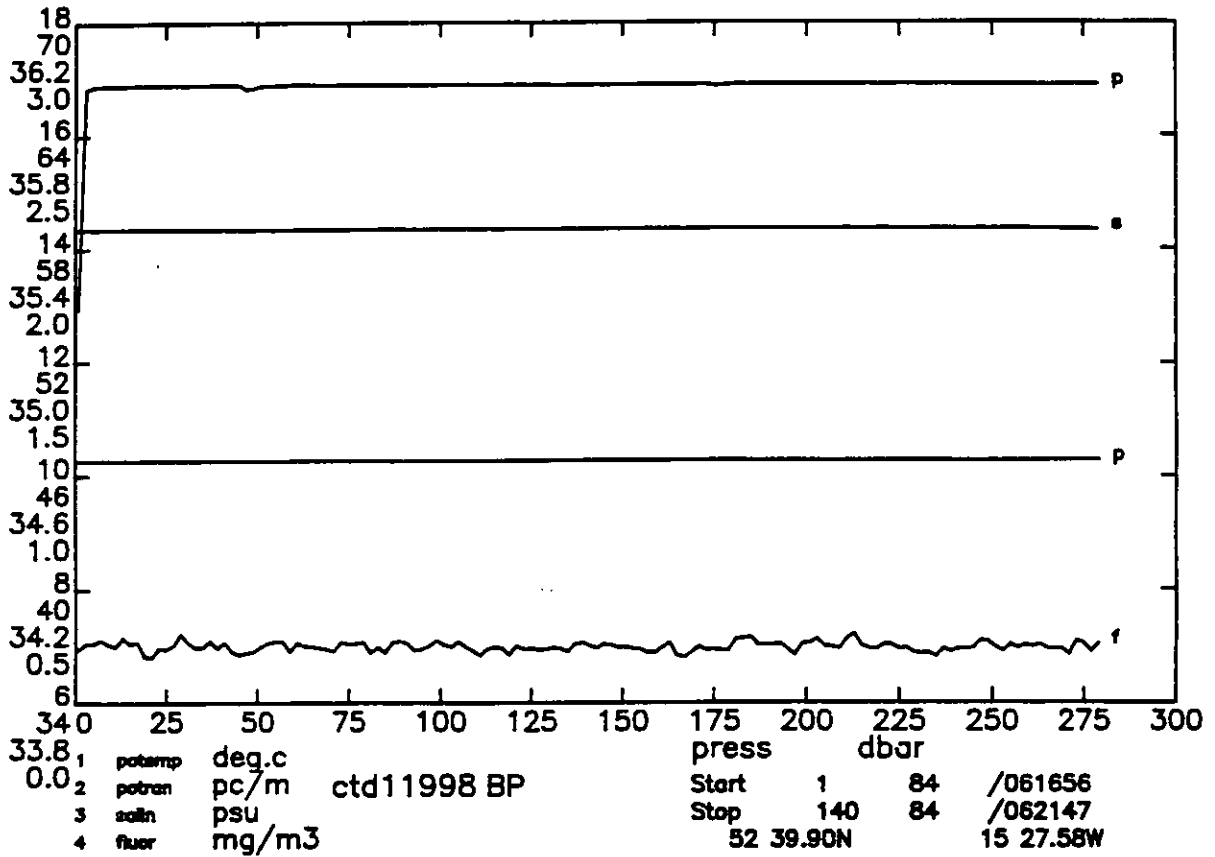


DISCOVERY CRUISE 189 STATION 11998

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	10.262	35.470	6.28	10.261	66.69	0.25	27.274	36.067	44.474	0.008	1491.5	10.	79.08	-9.999
20.	10.266	35.469	6.33	10.264	66.72	0.20	27.273	36.065	44.473	0.016	1491.7	20.	79.43	-0.578
30.	10.273	35.469	6.32	10.269	66.69	0.29	27.272	36.064	44.471	0.024	1491.9	30.	79.75	-0.509
40.	10.275	35.469	6.34	10.270	66.69	0.25	27.271	36.064	44.471	0.032	1492.0	40.	80.04	-0.359
50.	10.277	35.468	6.31	10.271	66.59	0.24	27.271	36.063	44.470	0.040	1492.2	50.	80.35	-0.462
60.	10.278	35.468	6.32	10.271	66.71	0.24	27.271	36.063	44.470	0.048	1492.4	59.	80.61	-0.217
70.	10.280	35.469	6.28	10.272	66.70	0.23	27.271	36.064	44.470	0.056	1492.6	69.	80.81	0.399
80.	10.282	35.469	6.26	10.273	66.69	0.24	27.271	36.063	44.470	0.064	1492.7	79.	81.06	-0.176
90.	10.284	35.468	6.22	10.274	66.69	0.27	27.270	36.063	44.469	0.072	1492.9	89.	81.38	-0.488
100.	10.285	35.469	6.23	10.273	66.69	0.27	27.271	36.064	44.470	0.080	1493.1	99.	81.54	0.517
120.	10.287	35.469	6.25	10.273	66.68	0.23	27.271	36.063	44.470	0.097	1493.4	119.	82.06	-0.220
140.	10.290	35.468	6.25	10.274	66.67	0.26	27.270	36.063	44.469	0.113	1493.7	139.	82.61	-0.305
160.	10.291	35.469	6.22	10.272	66.67	0.23	27.271	36.063	44.470	0.130	1494.1	159.	83.04	0.311
180.	10.293	35.468	6.24	10.272	66.67	0.25	27.271	36.063	44.470	0.146	1494.4	178.	83.55	-0.140
200.	10.290	35.469	6.23	10.267	66.69	0.26	27.272	36.065	44.472	0.163	1494.7	198.	83.92	0.447
220.	10.293	35.469	6.19	10.267	66.67	0.25	27.272	36.065	44.472	0.180	1495.1	218.	84.39	0.149
240.	10.298	35.468	6.23	10.270	66.71	0.23	27.271	36.064	44.471	0.197	1495.4	238.	84.98	-0.411
260.	10.301	35.468	6.19	10.270	66.69	0.25	27.270	36.063	44.470	0.214	1495.8	258.	85.53	-0.305
280.	10.303	35.469	6.22	10.270	66.69	0.26	27.271	36.064	44.471	0.231	1496.1	277.	85.92	0.391
300.	10.308	35.469	6.17	10.273	66.70	0.23	27.271	36.063	44.470	0.248	1496.4	297.	86.48	-0.340
350.	10.310	35.467	6.15	10.268	66.71	0.29	27.270	36.063	44.470	0.292	1497.3	347.	87.78	-0.223
400.	10.319	35.467	6.15	10.271	66.69	0.24	27.270	36.062	44.469	0.336	1498.1	396.	89.03	-0.142
450.	10.288	35.459	6.16	10.234	66.94	0.23	27.270	36.064	44.473	0.381	1498.8	446.	90.18	0.202
500.	10.227	35.447	6.06	10.167	67.22	0.22	27.272	36.069	44.480	0.426	1499.4	495.	91.13	0.416
550.	10.068	35.420	5.97	10.003	67.84	0.15	27.280	36.084	44.503	0.472	1499.7	544.	91.37	0.798
600.	9.677	35.363	5.67	9.607	67.82	0.16	27.302	36.124	44.559	0.517	1499.0	594.	89.97	1.312
650.	9.324	35.331	5.08	9.250	68.34	0.13	27.337	36.175	44.624	0.562	1498.5	643.	87.31	1.591
700.	9.133	35.338	4.99	9.054	68.35	0.14	27.374	36.220	44.677	0.605	1498.6	693.	84.67	1.584
750.	8.764	35.314	4.95	8.681	68.33	0.15	27.415	36.278	44.751	0.646	1498.1	742.	81.27	1.730
800.	8.843	35.388	4.83	8.754	67.98	0.14	27.462	36.325	44.789	0.686	1499.3	791.	78.12	1.680
850.	8.441	35.340	4.82	8.348	68.27	0.14	27.488	36.365	44.851	0.724	1498.6	841.	75.98	1.462
900.	8.390	35.375	4.81	8.291	68.07	0.12	27.524	36.403	44.891	0.762	1499.2	890.	73.49	1.534
950.	7.971	35.340	4.90	7.870	67.96	0.14	27.560	36.459	44.966	0.798	1498.5	939.	70.18	1.700
1000.	7.405	35.278	5.02	7.303	68.05	0.16	27.595	36.521	45.052	0.832	1497.1	989.	66.60	1.743
1200.	5.897	35.112	5.38	5.787	67.88	0.15	27.668	36.668	45.269	0.957	1494.3	1186.	59.14	1.344
1400.	4.822	35.007	5.93	4.702	67.09	0.11	27.715	36.770	45.423	1.069	1493.1	1383.	54.01	1.147
1500.	4.502	34.981	6.10	4.376	66.77	0.13	27.731	36.802	45.471	1.122	1493.4	1481.	52.59	0.935
1600.	4.165	34.947	6.26	4.034	68.17	0.11	27.740	36.830	45.515	1.174	1493.7	1580.	51.48	0.864
1700.	3.822	34.924	6.43	3.686	68.44	0.14	27.758	36.866	45.569	1.224	1493.9	1678.	49.39	1.025
1800.	3.658	34.920	6.49	3.514	68.41	0.14	27.772	36.889	45.600	1.273	1494.9	1776.	48.33	0.825
1900.	3.620	34.926	6.46	3.467	68.24	0.13	27.782	36.901	45.614	1.322	1496.4	1875.	48.14	0.614
2000.	3.542	34.933	6.43	3.381	68.52	0.11	27.795	36.919	45.636	1.369	1497.8	1973.	47.40	0.749
2100.	3.478	34.944	6.37	3.309	68.20	0.11	27.811	36.938	45.659	1.416	1499.2	2071.	46.49	0.785
2200.	3.326	34.950	6.31	3.149	68.34	0.15	27.831	36.967	45.696	1.462	1500.2	2169.	44.65	0.961
2300.	3.228	34.951	6.26	3.044	68.29	0.11	27.842	36.984	45.718	1.506	1501.5	2267.	43.88	0.740
2400.	3.150	34.953	6.23	2.957	68.35	0.10	27.851	36.997	45.735	1.550	1502.9	2365.	43.38	0.672
2500.	3.081	34.953	6.16	2.879	68.39	0.14	27.859	37.009	45.751	1.593	1504.3	2463.	43.04	0.628
2600.	3.027	34.952	6.10	2.816	68.37	0.08	27.864	37.017	45.762	1.636	1505.7	2561.	42.98	0.539
2700.	2.906	34.949	6.02	2.688	68.47	0.16	27.873	37.033	45.785	1.678	1506.9	2659.	42.07	0.760
2800.	2.828	34.945	5.98	2.601	68.39	0.16	27.877	37.042	45.798	1.720	1508.3	2757.	41.83	0.582

Sample data

2879.	2.780	34.942	5.92	2.546
2490.	3.092	34.952	6.16	2.891
1984.	3.549	34.928	6.43	3.390
1737.	3.759	34.920	6.43	3.620
1485.	4.527	34.985	6.00	4.402
1193.	5.934	35.115	5.60	5.823
891.	8.409	35.350	4.74	8.312
643.	9.347	35.325	5.15	9.273
411.	10.320	35.460	6.25	10.271
96.	10.284	35.468	6.25	10.273

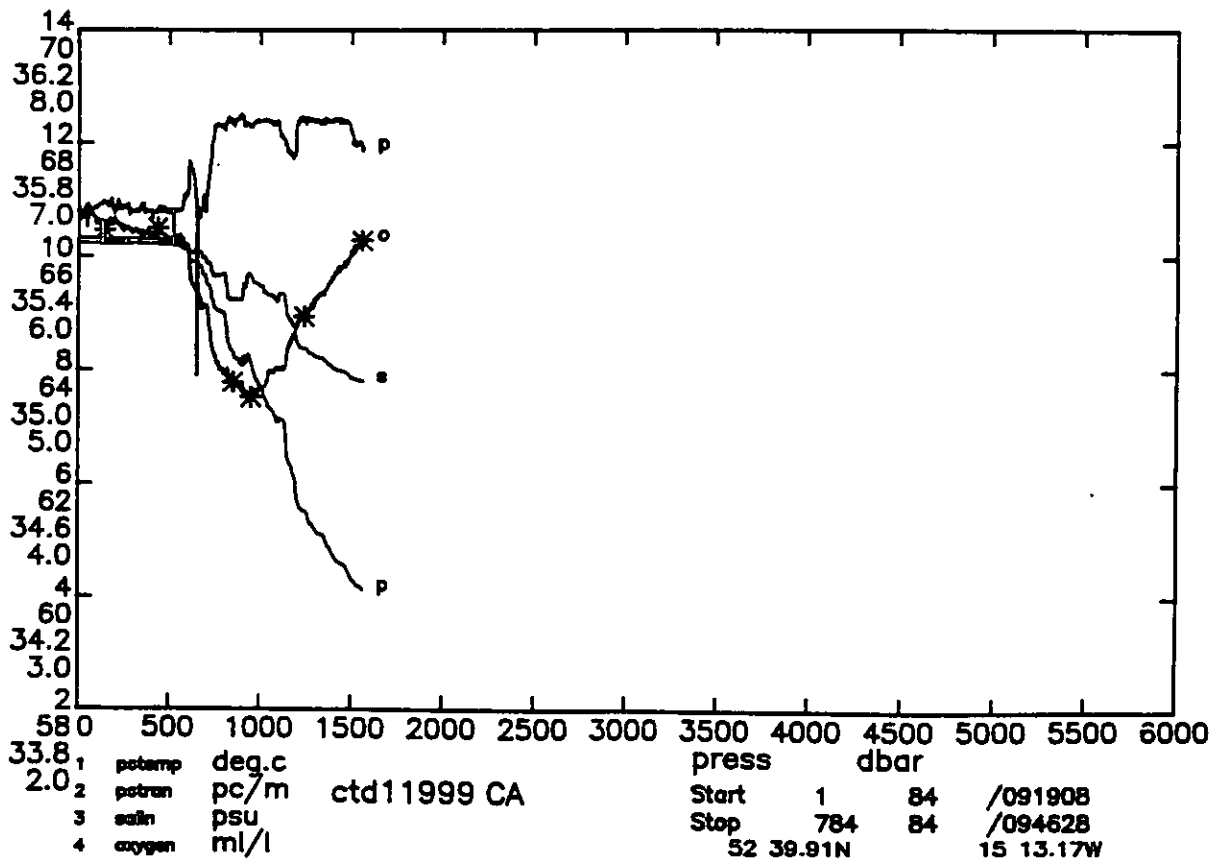
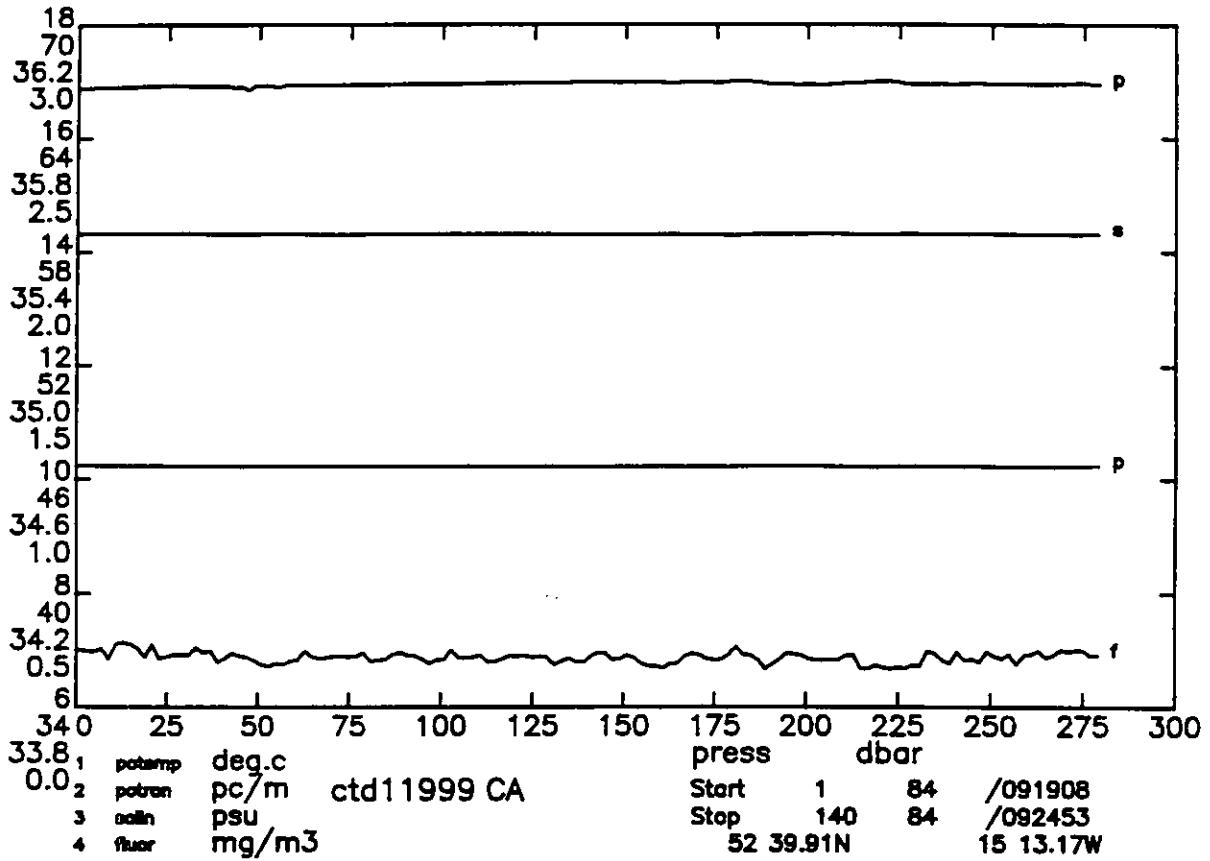


DISCOVERY CRUISE 189 STATION 11999

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	10.234	35.465	6.37	10.233	66.69	0.25	27.275	36.069	44.477	0.008	1491.4	10.	78.98	-9.999
20.	10.237	35.465	6.37	10.234	66.76	0.25	27.274	36.068	44.477	0.016	1491.6	20.	79.28	-0.409
30.	10.237	35.464	6.37	10.233	66.77	0.23	27.274	36.068	44.477	0.024	1491.7	30.	79.53	-0.141
40.	10.240	35.463	6.42	10.236	66.77	0.21	27.272	36.067	44.475	0.032	1491.9	40.	79.93	-0.733
50.	10.240	35.463	6.46	10.234	66.79	0.20	27.273	36.067	44.476	0.040	1492.1	50.	80.13	0.388
60.	10.240	35.463	6.42	10.233	66.83	0.21	27.273	36.067	44.476	0.048	1492.2	59.	80.38	0.068
70.	10.242	35.463	6.39	10.233	66.83	0.22	27.273	36.067	44.476	0.056	1492.4	69.	80.62	-0.082
80.	10.242	35.463	6.35	10.233	66.83	0.22	27.273	36.067	44.476	0.064	1492.6	79.	80.86	0.213
90.	10.240	35.463	6.35	10.230	66.87	0.24	27.273	36.068	44.476	0.072	1492.7	89.	81.07	0.314
100.	10.243	35.461	6.34	10.231	66.86	0.21	27.272	36.067	44.475	0.080	1492.9	99.	81.41	-0.563
120.	10.239	35.461	6.31	10.225	66.92	0.23	27.273	36.068	44.476	0.096	1493.2	119.	81.85	0.299
140.	10.236	35.459	6.28	10.220	66.98	0.21	27.272	36.067	44.476	0.113	1493.5	139.	82.39	-0.296
160.	10.242	35.460	6.28	10.223	66.91	0.18	27.273	36.067	44.476	0.129	1493.9	159.	82.85	0.220
180.	10.232	35.455	6.31	10.211	67.01	0.25	27.271	36.066	44.476	0.146	1494.2	178.	83.47	-0.476
200.	10.254	35.461	6.33	10.230	66.83	0.22	27.272	36.067	44.475	0.163	1494.6	198.	83.87	0.392
220.	10.236	35.458	6.29	10.210	67.00	0.18	27.273	36.068	44.478	0.180	1494.9	218.	84.25	0.413
240.	10.253	35.461	6.27	10.225	66.84	0.22	27.273	36.068	44.476	0.196	1495.3	238.	84.78	-0.250
260.	10.259	35.461	6.26	10.228	66.86	0.23	27.273	36.067	44.476	0.213	1495.6	258.	85.27	-0.134
280.	10.269	35.463	6.23	10.235	66.84	0.23	27.273	36.067	44.475	0.231	1496.0	277.	85.76	0.033
300.	10.276	35.463	6.21	10.240	66.78	0.20	27.272	36.066	44.474	0.248	1496.3	297.	86.32	-0.352
350.	10.264	35.460	6.21	10.222	66.90	0.21	27.273	36.068	44.477	0.291	1497.1	347.	87.44	0.262
400.	10.271	35.461	6.17	10.223	66.79	0.22	27.273	36.068	44.477	0.335	1498.0	396.	88.63	0.107
450.	10.268	35.459	6.20	10.214	66.86	0.22	27.273	36.068	44.478	0.380	1498.8	446.	89.84	0.066
500.	10.269	35.458	6.16	10.208	66.77	0.21	27.273	36.069	44.478	0.425	1499.6	495.	91.03	0.106
550.	10.263	35.455	6.18	10.196	66.82	0.20	27.273	36.069	44.479	0.471	1500.4	544.	92.22	0.119
600.	10.195	35.441	6.06	10.123	67.12	0.15	27.276	36.075	44.488	0.517	1501.0	594.	93.13	0.438
650.	9.992	35.425	5.70	9.915	66.87	0.16	27.298	36.106	44.528	0.563	1501.0	643.	91.90	1.274
700.	9.727	35.394	5.57	9.644	66.80	0.16	27.320	36.141	44.573	0.609	1500.9	693.	90.58	1.288
750.	9.188	35.328	5.13	9.102	68.30	0.13	27.359	36.203	44.659	0.654	1499.7	742.	87.25	1.729
800.	9.106	35.342	4.97	9.015	68.31	0.13	27.384	36.232	44.690	0.697	1500.2	791.	85.86	1.287
850.	8.412	35.252	4.92	8.320	68.33	0.12	27.423	36.303	44.792	0.739	1498.4	841.	81.90	1.833
900.	8.182	35.245	4.85	8.085	68.46	0.14	27.454	36.344	44.843	0.779	1498.3	890.	79.60	1.488
950.	8.229	35.330	4.79	8.126	68.29	0.14	27.514	36.402	44.897	0.818	1499.4	939.	75.03	1.933
1000.	7.783	35.295	4.83	7.677	68.39	0.13	27.554	36.462	44.977	0.854	1498.5	989.	71.29	1.780
1100.	7.195	35.241	5.02	7.083	68.36	0.11	27.597	36.533	45.075	0.924	1497.9	1087.	67.68	1.351
1200.	5.929	35.110	5.38	5.817	68.26	0.13	27.663	36.661	45.261	0.988	1494.4	1186.	59.72	1.795
1300.	5.313	35.050	5.58	5.197	68.39	0.13	27.692	36.721	45.350	1.046	1493.5	1285.	56.56	1.239
1400.	4.859	35.010	5.79	4.738	68.39	0.14	27.713	36.766	45.417	1.101	1493.3	1383.	54.33	1.088
1500.	4.455	34.972	6.03	4.330	68.19	0.14	27.729	36.803	45.474	1.155	1493.2	1481.	52.57	0.995

Sample data

1560.	4.271	34.961	6.14	4.142
1243.	5.627	35.075	5.47	5.514
951.	8.223	35.325	4.76	8.120
853.	8.401	35.247	4.89	8.308
436.	10.273	35.463	6.25	10.221
143.	10.238	35.466	6.23	10.221

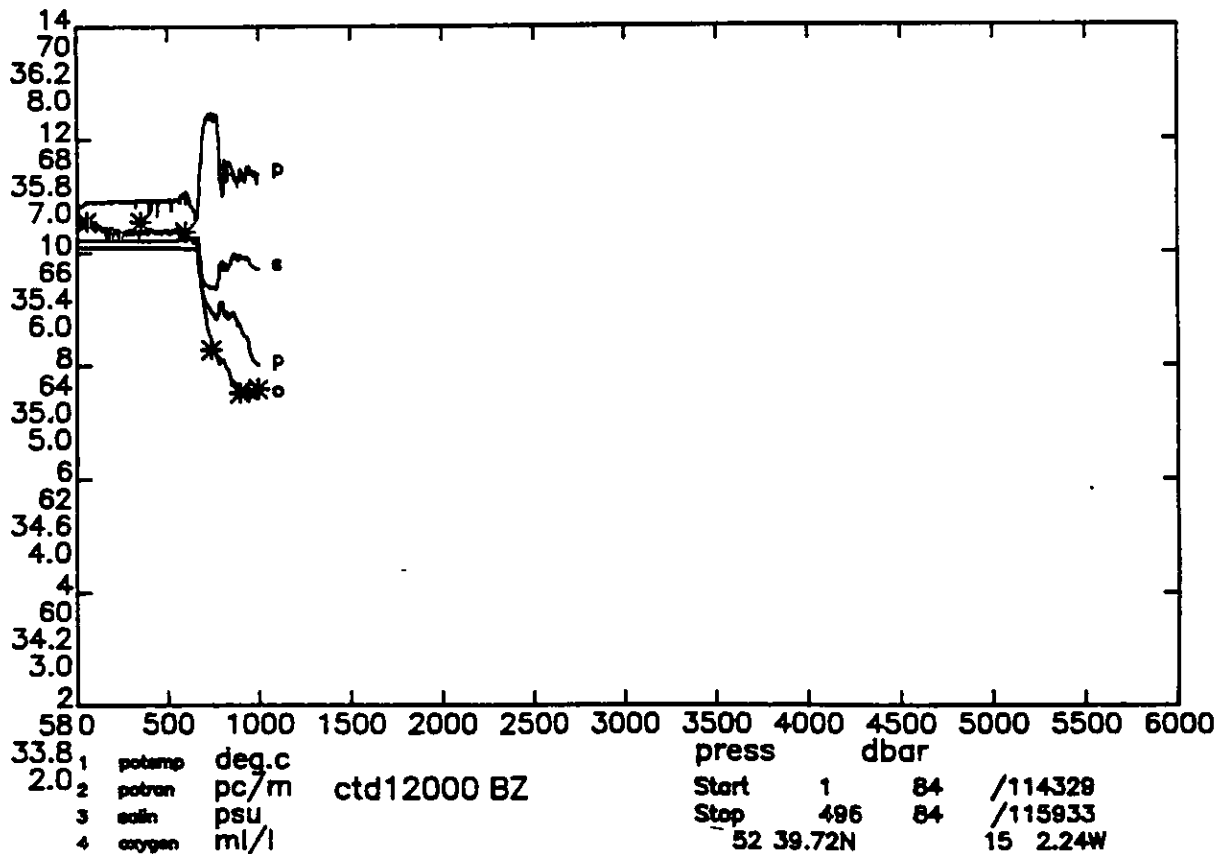
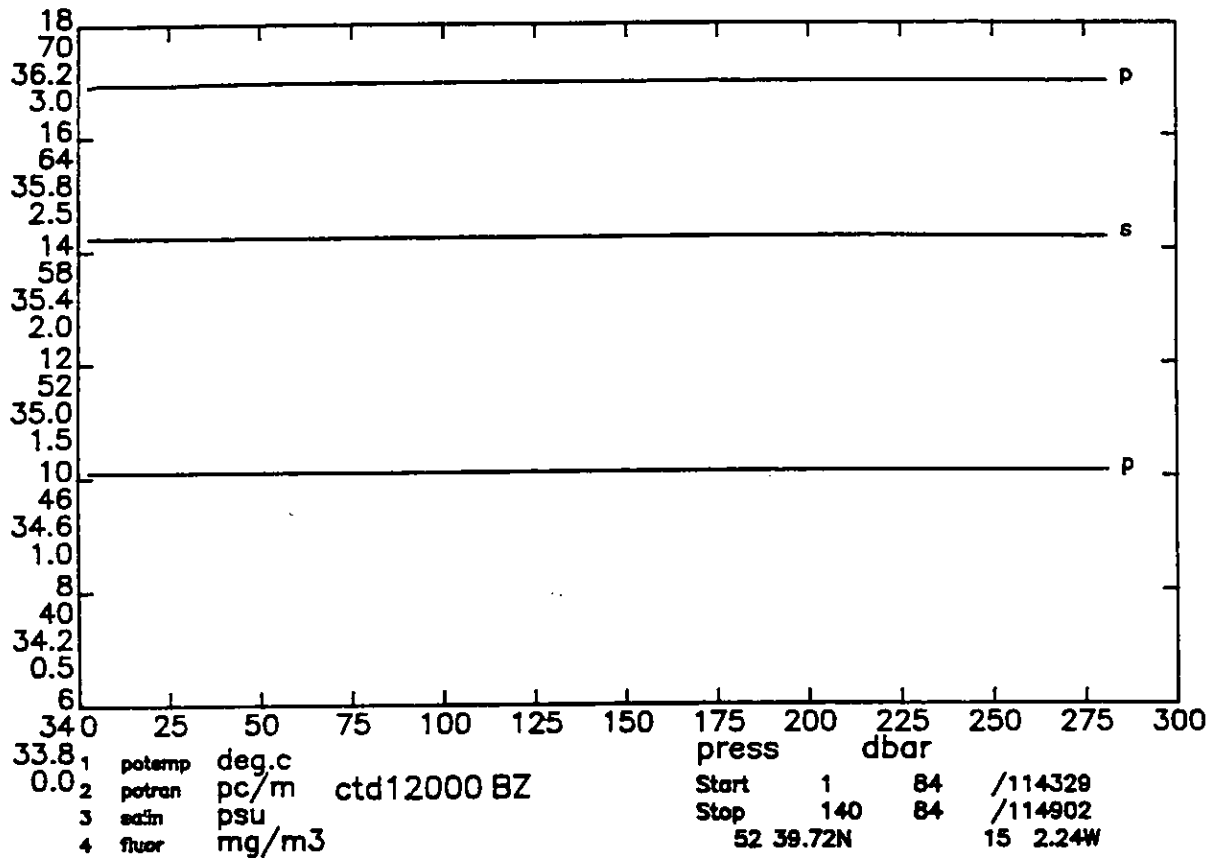




DISCOVERY CRUISE 189 STATION 12000

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sdv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	10.091	35.445	6.24	10.090	66.83	-9.99	27.284	36.084	44.499	0.008	1490.9	10.	78.12	-9.999
20.	10.092	35.445	6.24	10.090	66.82	-9.99	27.284	36.084	44.499	0.016	1491.0	20.	78.37	-0.162
30.	10.093	35.444	6.26	10.090	66.84	-9.99	27.284	36.084	44.498	0.023	1491.2	30.	78.62	-0.189
40.	10.095	35.444	6.26	10.090	66.87	-9.99	27.283	36.083	44.498	0.031	1491.4	40.	78.93	-0.473
50.	10.095	35.444	6.30	10.090	66.90	-9.99	27.283	36.084	44.498	0.039	1491.5	50.	79.14	0.297
60.	10.097	35.444	6.27	10.090	66.89	-9.99	27.283	36.084	44.498	0.047	1491.7	59.	79.38	0.124
70.	10.098	35.444	6.27	10.090	66.89	-9.99	27.283	36.084	44.498	0.055	1491.9	69.	79.63	-0.088
80.	10.099	35.444	6.26	10.089	66.89	-9.99	27.283	36.084	44.498	0.063	1492.0	79.	79.87	-0.132
90.	10.100	35.444	6.22	10.090	66.88	-9.99	27.283	36.084	44.498	0.071	1492.2	89.	80.12	-0.180
100.	10.101	35.444	6.23	10.089	66.90	-9.99	27.283	36.084	44.498	0.079	1492.4	99.	80.36	0.115
120.	10.104	35.443	6.23	10.090	66.90	-9.99	27.283	36.083	44.498	0.095	1492.7	119.	80.89	-0.256
140.	10.106	35.443	6.20	10.089	66.88	-9.99	27.283	36.083	44.498	0.111	1493.1	139.	81.35	0.154
160.	10.108	35.443	6.21	10.090	66.90	-9.99	27.282	36.083	44.497	0.128	1493.4	159.	81.88	-0.251
180.	10.110	35.443	6.21	10.089	66.91	-9.99	27.283	36.083	44.497	0.144	1493.7	178.	82.36	0.068
200.	10.113	35.443	6.18	10.089	66.92	-9.99	27.282	36.083	44.497	0.161	1494.1	198.	82.85	-0.153
220.	10.114	35.443	6.20	10.089	66.92	-9.99	27.283	36.083	44.498	0.177	1494.4	218.	83.29	0.283
240.	10.117	35.443	6.13	10.089	66.91	-9.99	27.282	36.083	44.497	0.194	1494.7	238.	83.81	-0.266
260.	10.120	35.443	6.19	10.089	66.91	-9.99	27.282	36.083	44.497	0.211	1495.1	258.	84.29	0.097
280.	10.123	35.443	6.19	10.090	66.90	-9.99	27.282	36.083	44.497	0.228	1495.4	277.	84.80	-0.235
300.	10.125	35.443	6.18	10.090	66.90	-9.99	27.282	36.083	44.497	0.245	1495.8	297.	85.25	0.224
350.	10.130	35.442	6.18	10.088	66.92	-9.99	27.282	36.082	44.497	0.288	1496.6	347.	86.50	-0.178
400.	10.137	35.441	6.21	10.090	66.92	-9.99	27.281	36.081	44.496	0.331	1497.5	396.	87.80	-0.261
450.	10.139	35.441	6.19	10.085	66.91	-9.99	27.282	36.083	44.497	0.375	1498.3	446.	88.90	0.266
500.	10.146	35.441	6.18	10.086	66.94	-9.99	27.282	36.082	44.497	0.420	1499.1	495.	90.11	-0.101
550.	10.153	35.441	6.18	10.087	66.93	-9.99	27.282	36.082	44.497	0.466	1500.0	544.	91.31	-0.077
600.	10.131	35.446	6.13	10.059	67.07	-9.99	27.290	36.092	44.507	0.511	1500.7	594.	91.68	0.741
650.	10.130	35.452	6.09	10.052	66.57	-9.99	27.296	36.098	44.514	0.557	1501.6	643.	92.30	0.618
700.	9.266	35.294	5.49	9.186	68.27	-9.99	27.318	36.159	44.612	0.603	1499.1	693.	90.11	1.495
750.	8.999	35.277	5.15	8.915	68.45	-9.99	27.349	36.202	44.666	0.647	1498.9	742.	87.86	1.496
800.	9.176	35.363	5.04	9.085	67.01	-9.99	27.389	36.233	44.689	0.691	1500.5	791.	85.52	1.515
850.	9.030	35.381	4.87	8.933	67.43	-9.99	27.428	36.278	44.740	0.732	1500.8	841.	82.69	1.621
900.	8.751	35.386	4.79	8.650	67.39	-9.99	27.476	36.340	44.813	0.773	1500.6	890.	78.64	1.852
950.	8.306	35.358	4.73	8.203	67.46	-9.99	27.525	36.408	44.900	0.811	1499.7	939.	74.24	1.910

Sample data

991.	8.120	35.345	4.79	8.013
892.	8.831	35.394	4.76	8.731
736.	9.044	35.280	5.14	8.961
593.	10.136	35.447	6.18	10.064
346.	10.130	35.444	6.27	10.089
48.	10.095	35.444	6.27	10.090

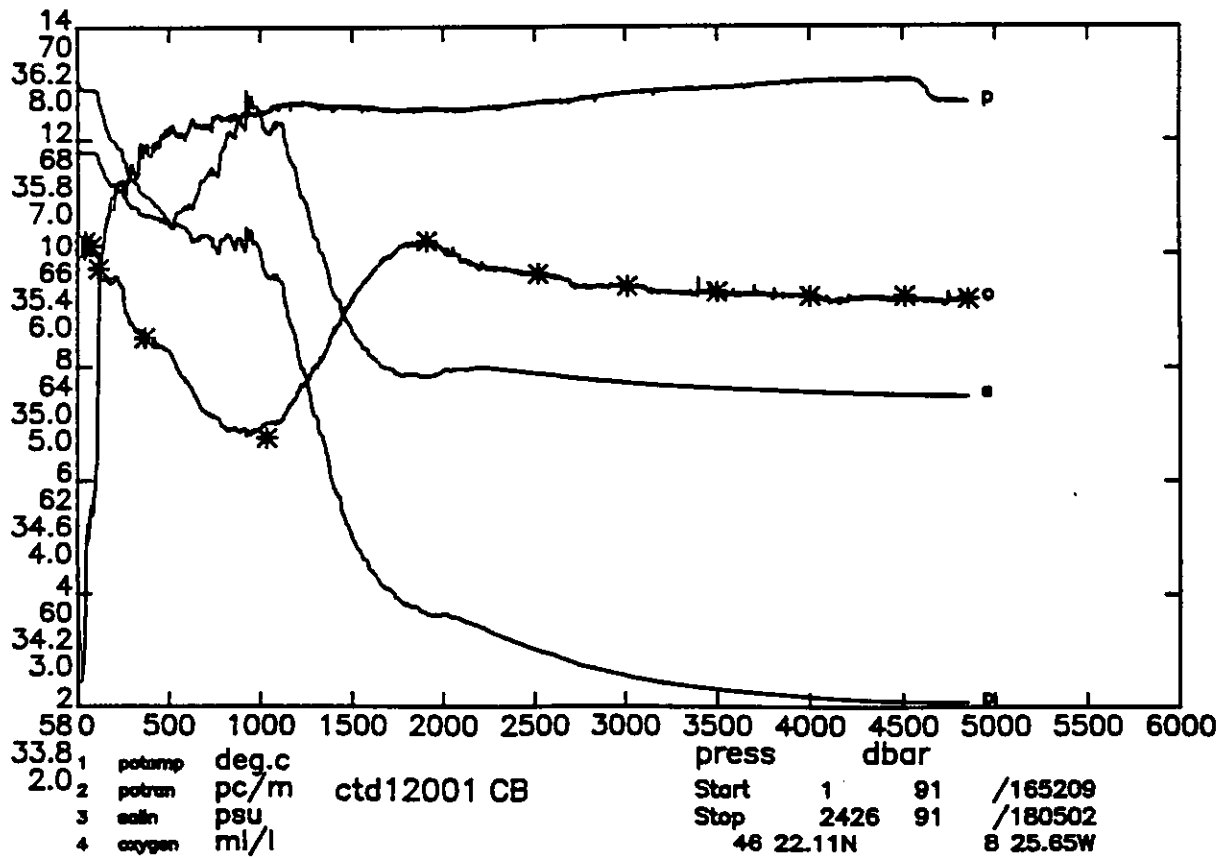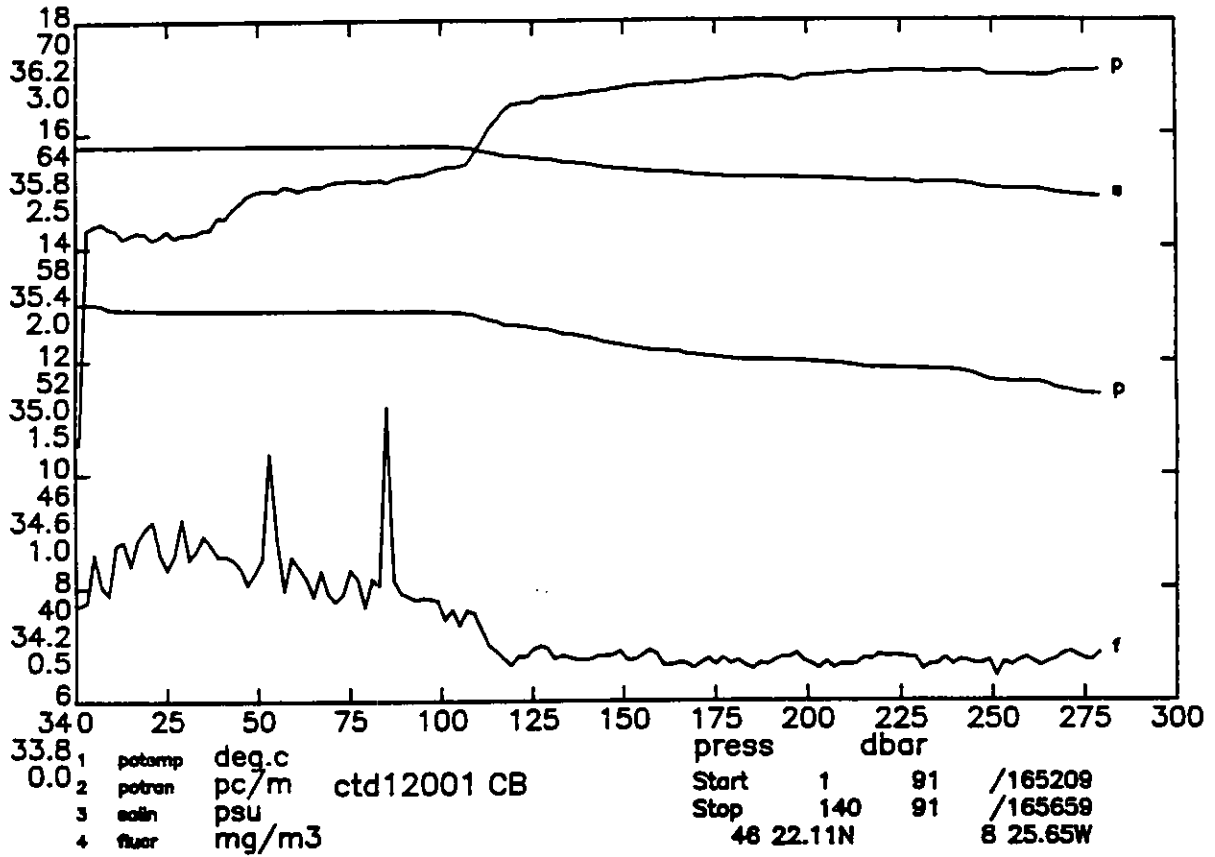

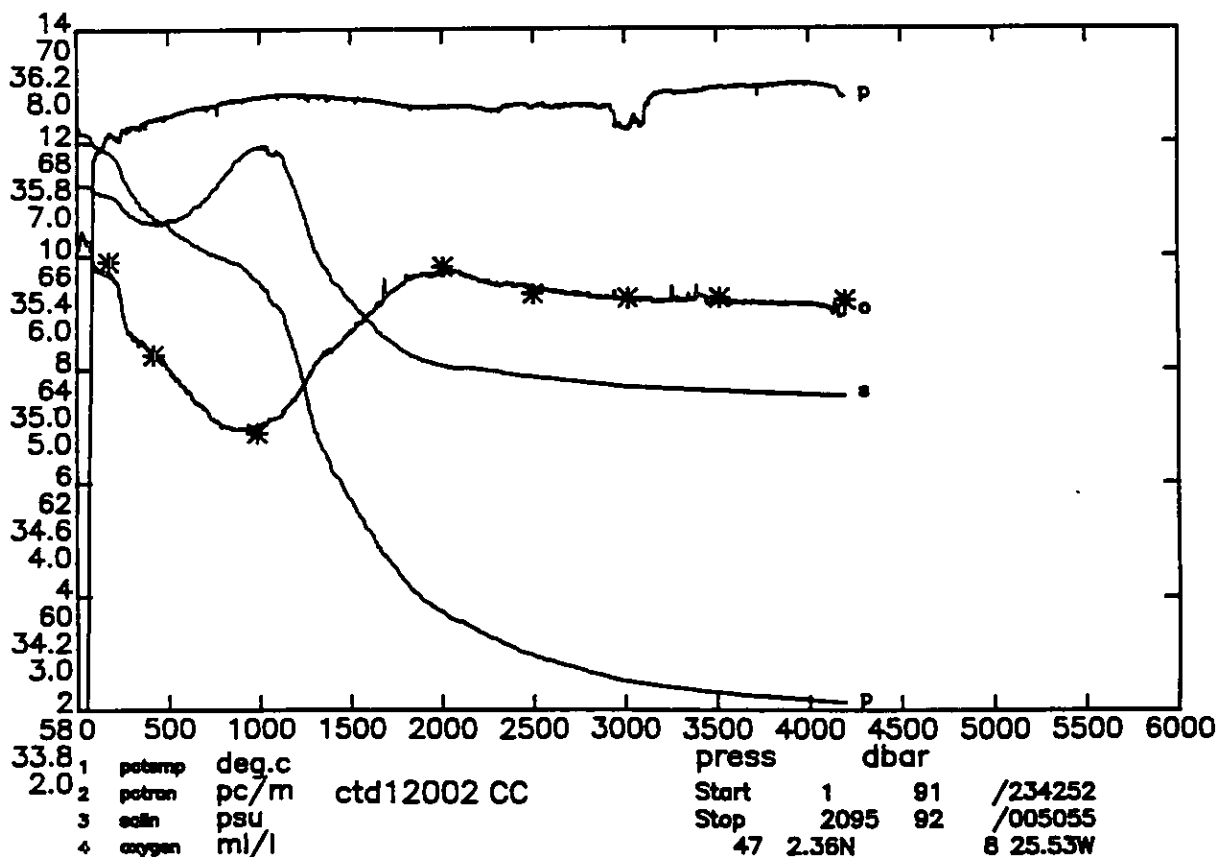
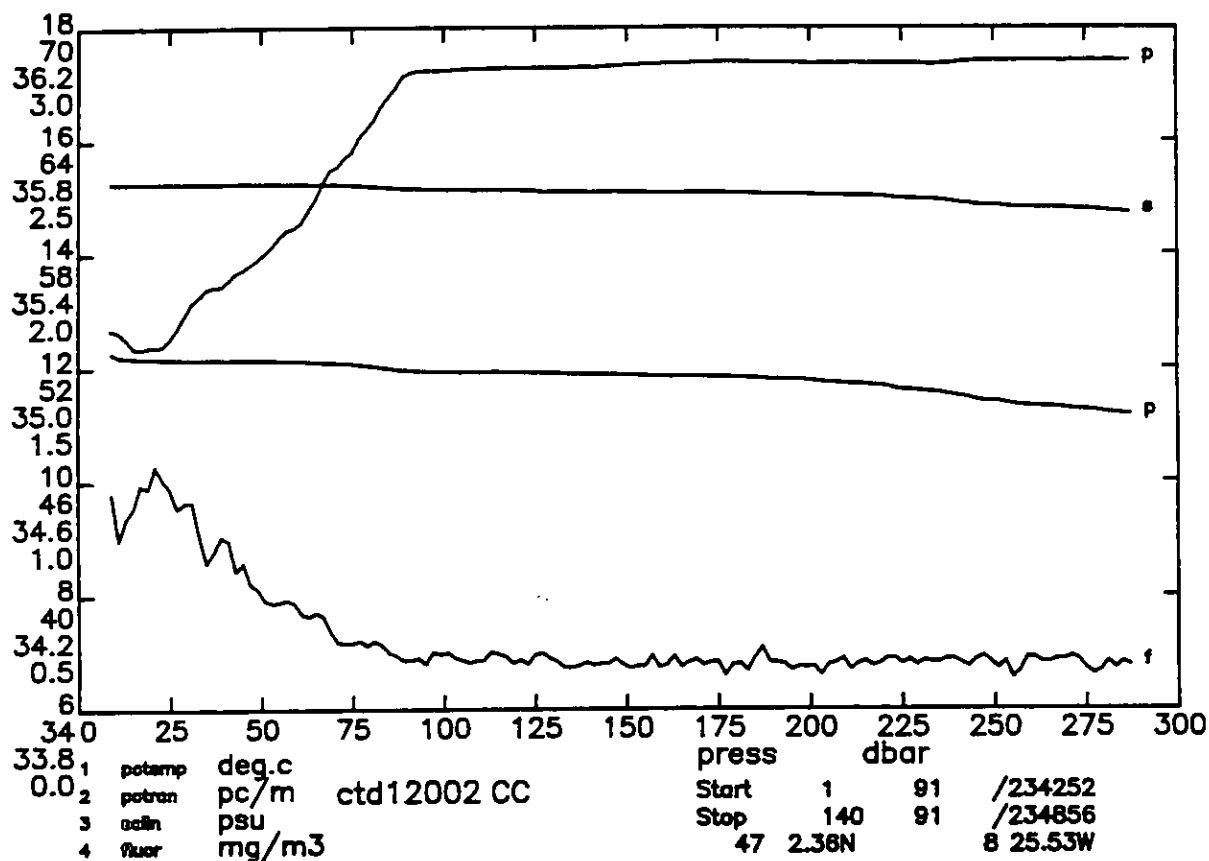




DISCOVERY CRUISE 189 STATION 12002



pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sdv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	12.242	35.650	6.08	12.240	53.95	0.84	27.048	35.758	44.088	0.010	1498.6	10.	100.56	-9.999
20.	12.181	35.650	6.17	12.178	53.13	1.02	27.060	35.772	44.105	0.020	1498.5	20.	99.70	1.947
30.	12.166	35.650	6.21	12.162	55.13	0.91	27.062	35.776	44.109	0.030	1498.7	30.	99.71	0.960
40.	12.165	35.650	6.15	12.160	56.47	0.75	27.063	35.777	44.109	0.040	1498.8	40.	99.94	0.425
50.	12.163	35.649	6.13	12.157	57.89	0.51	27.063	35.777	44.110	0.050	1499.0	50.	100.22	0.092
60.	12.152	35.649	6.12	12.145	59.56	0.45	27.065	35.779	44.113	0.060	1499.1	59.	100.29	0.844
70.	12.119	35.647	6.11	12.110	62.56	0.32	27.070	35.786	44.121	0.070	1499.2	69.	100.09	1.270
80.	12.064	35.640	6.02	12.054	64.86	0.29	27.076	35.793	44.130	0.080	1499.1	79.	99.85	1.311
90.	11.988	35.631	5.94	11.976	67.52	0.22	27.084	35.805	44.145	0.090	1499.0	89.	99.30	1.664
100.	11.963	35.627	5.91	11.950	67.74	0.25	27.086	35.808	44.149	0.100	1499.1	99.	99.40	0.771
120.	11.947	35.625	5.88	11.931	67.87	0.21	27.088	35.811	44.153	0.120	1499.4	119.	99.77	0.561
140.	11.909	35.618	5.87	11.891	67.91	0.20	27.090	35.815	44.158	0.140	1499.6	139.	100.11	0.599
160.	11.870	35.615	5.85	11.849	68.10	0.19	27.096	35.822	44.167	0.160	1499.8	159.	100.14	0.930
180.	11.844	35.612	5.83	11.820	68.19	0.20	27.099	35.827	44.173	0.180	1500.0	178.	100.34	0.770
200.	11.789	35.607	5.80	11.763	68.10	0.19	27.106	35.836	44.184	0.200	1500.1	198.	100.20	1.069
220.	11.697	35.598	5.76	11.669	68.09	0.21	27.117	35.851	44.202	0.220	1500.1	218.	99.69	1.330
240.	11.531	35.579	5.60	11.500	68.14	0.21	27.134	35.874	44.233	0.240	1499.9	238.	98.57	1.666
260.	11.353	35.560	5.42	11.319	68.24	0.23	27.153	35.901	44.267	0.259	1499.6	258.	97.18	1.792
280.	11.246	35.551	5.33	11.211	68.24	0.19	27.166	35.919	44.288	0.279	1499.5	277.	96.44	1.454
300.	11.138	35.542	5.31	11.101	68.30	0.21	27.179	35.937	44.310	0.298	1499.5	297.	95.64	1.490
350.	10.901	35.520	5.25	10.857	68.32	0.20	27.207	35.974	44.358	0.345	1499.4	347.	94.15	1.362
400.	10.782	35.517	5.18	10.733	68.39	0.15	27.227	35.999	44.388	0.392	1499.8	396.	93.45	1.149
450.	10.673	35.513	5.12	10.617	68.45	0.21	27.244	36.022	44.415	0.439	1500.3	446.	92.94	1.085
500.	10.600	35.530	5.00	10.538	68.47	0.23	27.272	36.053	44.448	0.485	1500.9	495.	91.52	1.338
550.	10.466	35.532	4.92	10.398	68.52	0.22	27.298	36.084	44.485	0.531	1501.2	545.	90.16	1.318
600.	10.370	35.549	4.81	10.297	68.58	0.17	27.329	36.119	44.524	0.575	1501.7	594.	88.36	1.424
650.	10.261	35.576	4.71	10.182	68.63	0.20	27.371	36.165	44.574	0.618	1502.2	644.	85.50	1.651
700.	10.186	35.601	4.66	10.102	68.63	0.22	27.404	36.202	44.613	0.661	1502.8	693.	83.47	1.474
750.	10.124	35.638	4.56	10.033	68.65	0.25	27.445	36.245	44.659	0.702	1503.4	742.	80.74	1.623
800.	10.066	35.678	4.51	9.969	68.71	0.18	27.487	36.289	44.705	0.742	1504.1	792.	77.90	1.647
850.	10.000	35.717	4.48	9.897	68.75	0.20	27.530	36.334	44.753	0.780	1504.7	841.	74.96	1.666
900.	9.937	35.753	4.48	9.828	68.76	0.22	27.570	36.377	44.798	0.817	1505.4	891.	72.24	1.620
950.	9.770	35.776	4.49	9.656	68.79	0.19	27.617	36.431	44.858	0.852	1505.6	940.	68.72	1.775
1000.	9.646	35.784	4.50	9.527	68.79	0.17	27.645	36.464	44.896	0.886	1506.0	989.	66.99	1.395
1200.	8.339	35.620	4.77	8.206	68.84	0.20	27.730	36.609	45.097	1.012	1504.3	1187.	60.23	1.366
1400.	6.324	35.308	5.17	6.188	68.80	0.21	27.772	36.749	45.329	1.125	1499.5	1384.	53.83	1.298
1600.	5.311	35.169	5.48	5.165	68.75	0.20	27.790	36.819	45.448	1.231	1498.7	1581.	51.38	0.950
1800.	4.408	35.060	5.77	4.255	68.65	0.17	27.807	36.884	45.557	1.331	1498.2	1777.	48.47	0.953
2000.	3.883	35.012	5.85	3.717	68.62	0.29	27.825	36.930	45.630	1.425	1499.3	1974.	46.35	0.847
2200.	3.546	34.998	5.78	3.366	68.59	0.21	27.848	36.972	45.689	1.515	1501.2	2170.	44.28	0.821
2400.	3.275	34.979	5.73	3.079	68.65	0.20	27.861	37.000	45.732	1.603	1503.4	2367.	43.26	0.689
2600.	3.069	34.965	5.69	2.858	68.61	0.23	27.870	37.021	45.764	1.688	1505.9	2563.	42.66	0.619
2700.	2.984	34.958	5.66	2.764	68.64	0.26	27.873	37.029	45.777	1.731	1507.2	2660.	42.56	0.554
2800.	2.889	34.950	5.66	2.661	68.63	0.20	27.876	37.038	45.791	1.773	1508.5	2758.	42.37	0.572
2900.	2.823	34.944	5.63	2.586	68.64	0.26	27.878	37.044	45.801	1.816	1509.9	2856.	42.40	0.498
3000.	2.748	34.937	5.62	2.503	68.23	0.25	27.880	37.050	45.812	1.858	1511.3	2954.	42.35	0.517
3100.	2.714	34.934	5.61	2.459	68.35	0.20	27.881	37.054	45.817	1.901	1512.9	3052.	42.63	0.388
3200.	2.676	34.931	5.59	2.411	68.87	0.22	27.882	37.058	45.824	1.943	1514.4	3150.	42.84	0.419
3300.	2.653	34.928	5.61	2.378	68.85	0.19	27.883	37.060	45.828	1.986	1516.0	3247.	43.24	0.326
3400.	2.620	34.924	5.64	2.335	68.90	0.22	27.884	37.063	45.833	2.030	1517.6	3345.	43.50	0.391
3500.	2.601	34.922	5.58	2.306	68.95	0.18	27.885	37.066	45.838	2.074	1519.2	3442.	43.85	0.345
3600.	2.574	34.919	5.58	2.269	68.98	0.24	27.885	37.069	45.842	2.118	1520.8	3540.	44.19	0.352
3700.	2.551	34.916	5.58	2.236	68.98	0.20	27.885	37.071	45.846	2.162	1522.4	3637.	44.56	0.330
3800.	2.545	34.914	5.57	2.218	69.00	0.19	27.885	37.071	45.847	2.207	1524.1	3735.	45.10	0.223
3900.	2.534	34.912	5.57	2.196	69.05	0.22	27.885	37.073	45.850	2.252	1525.8	3832.	45.52	0.304
4000.	2.517	34.909	5.56	2.168	69.03	0.21	27.885	37.075	45.853	2.298	1527.4	3930.	45.94	0.303
4100.	2.505	34.907	5.54	2.145	68.99	0.24	27.885	37.076	45.856	2.344	1529.1	4027.	46.40	0.278



Sample data

4197.	2.497	34.905	5.59	2.125
3515.	2.597	34.921	5.65	2.300
3017.	2.748	34.937	5.64	2.500
2498.	3.155	34.970	5.76	2.952
2004.	3.877	35.012	5.90	3.710
986.	9.682	35.791	4.44	9.564
418.	10.724	35.513	5.13	10.672
173.	11.860	35.612	5.95	11.837

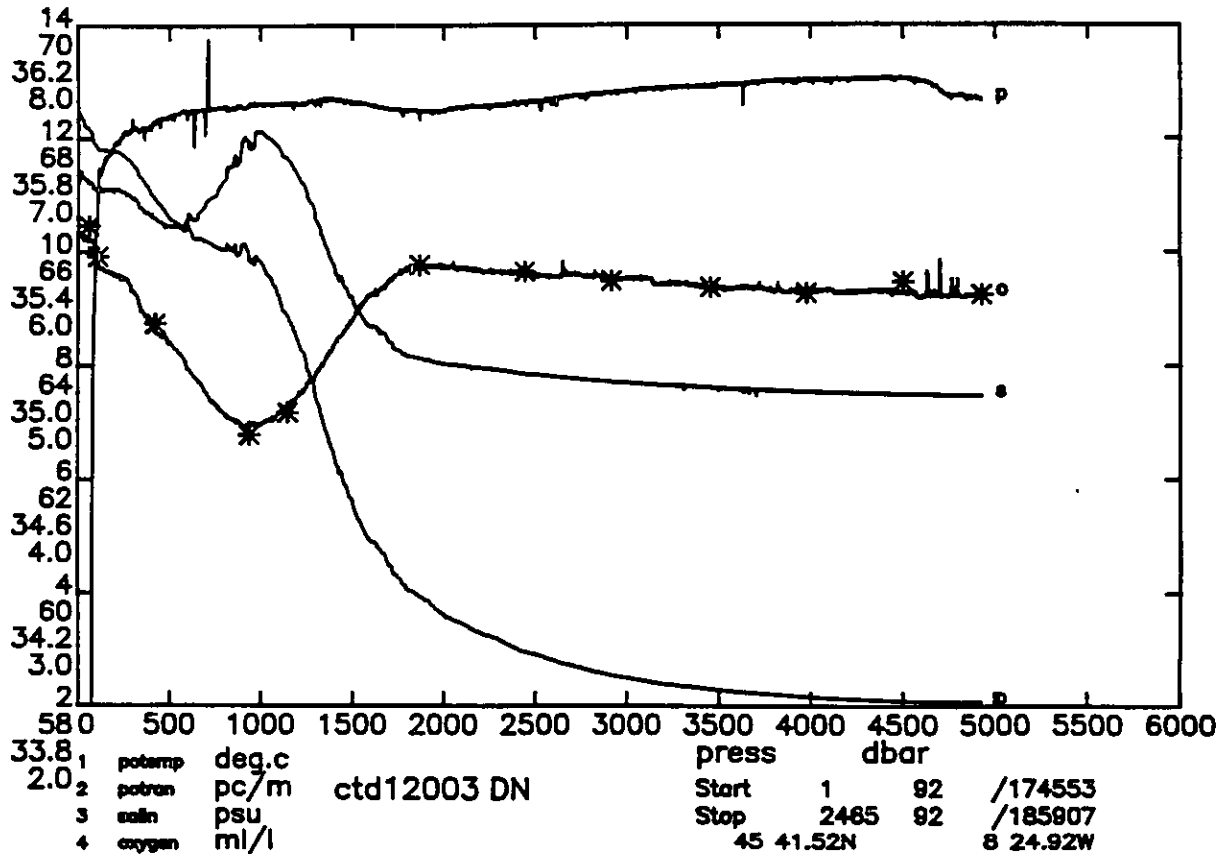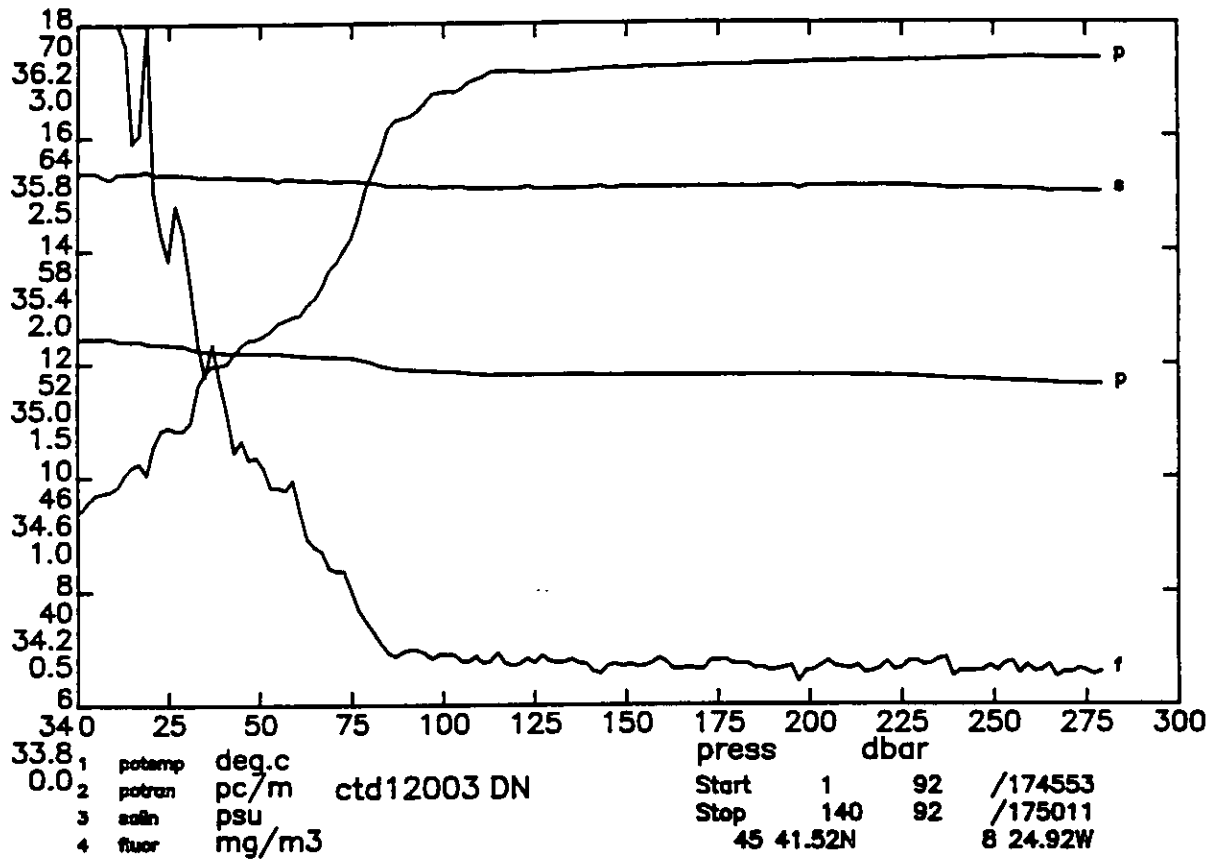

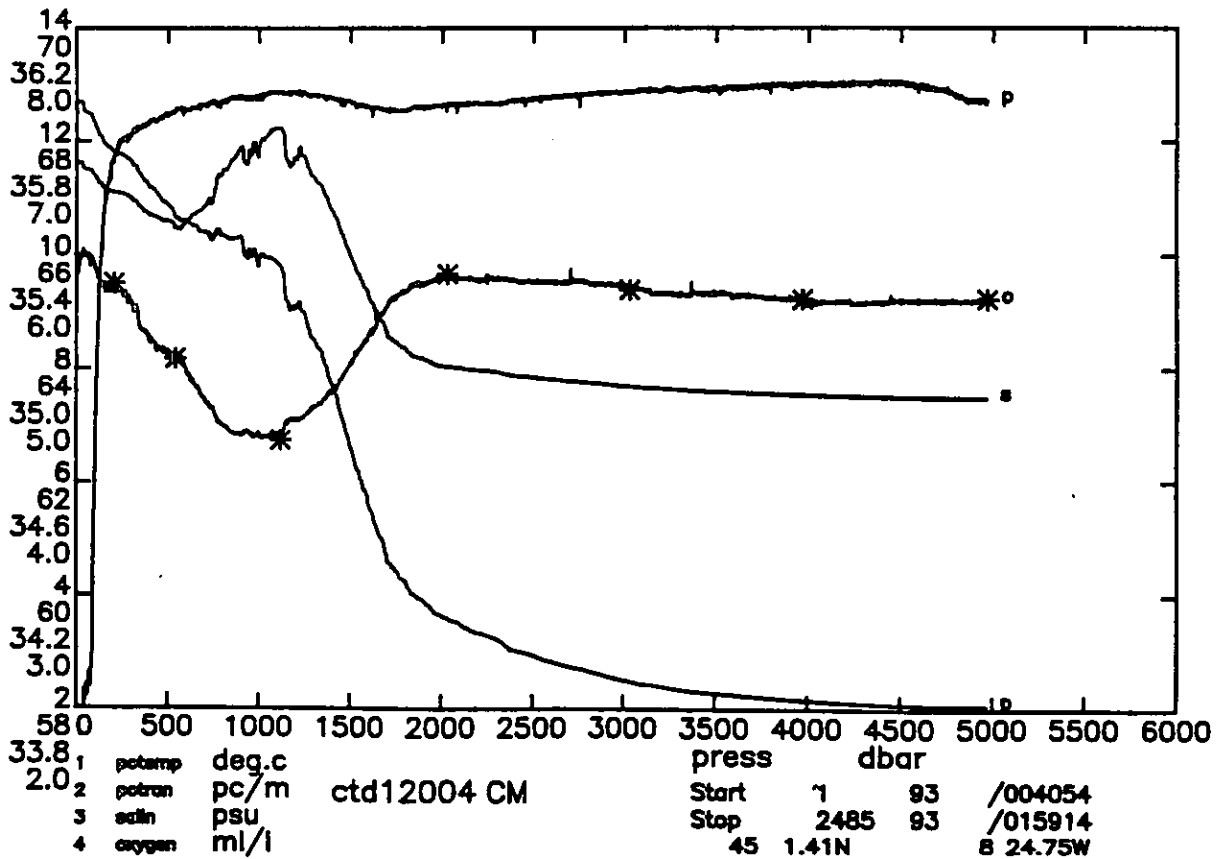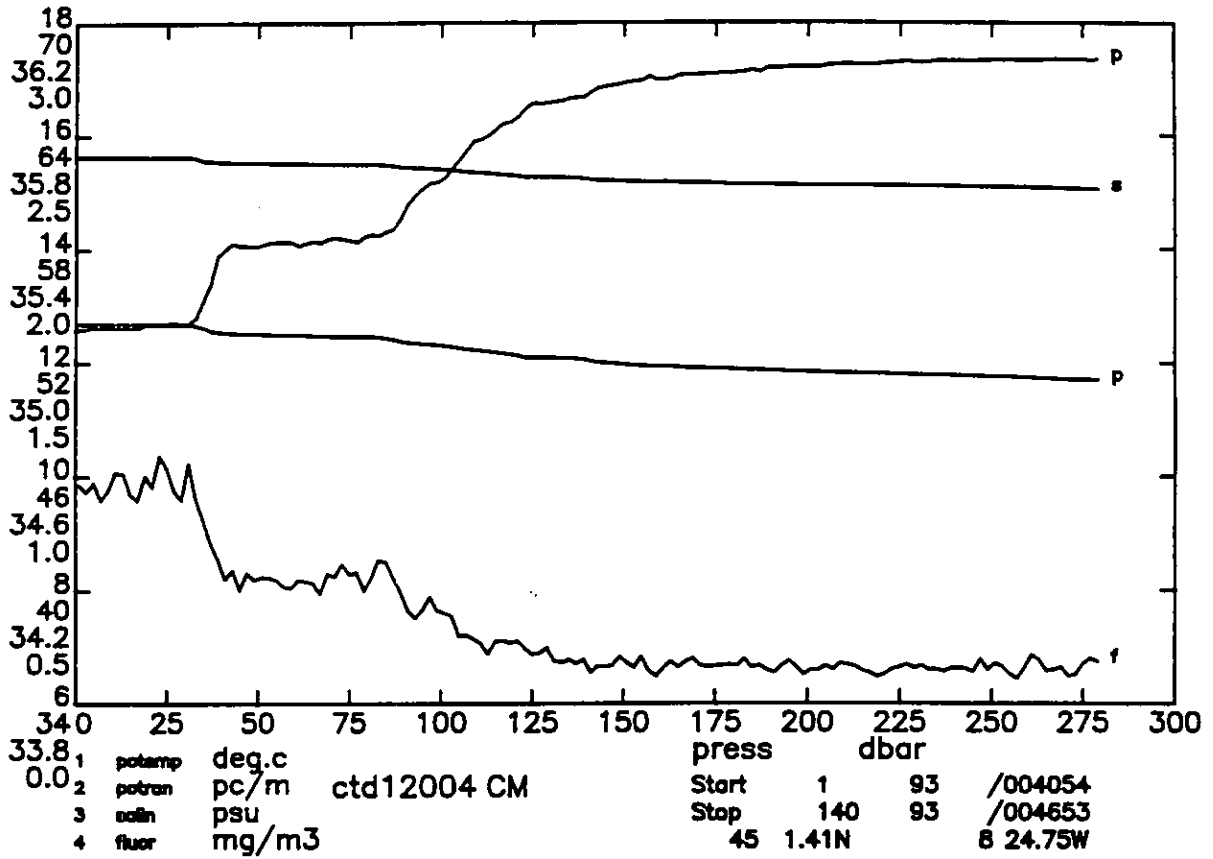

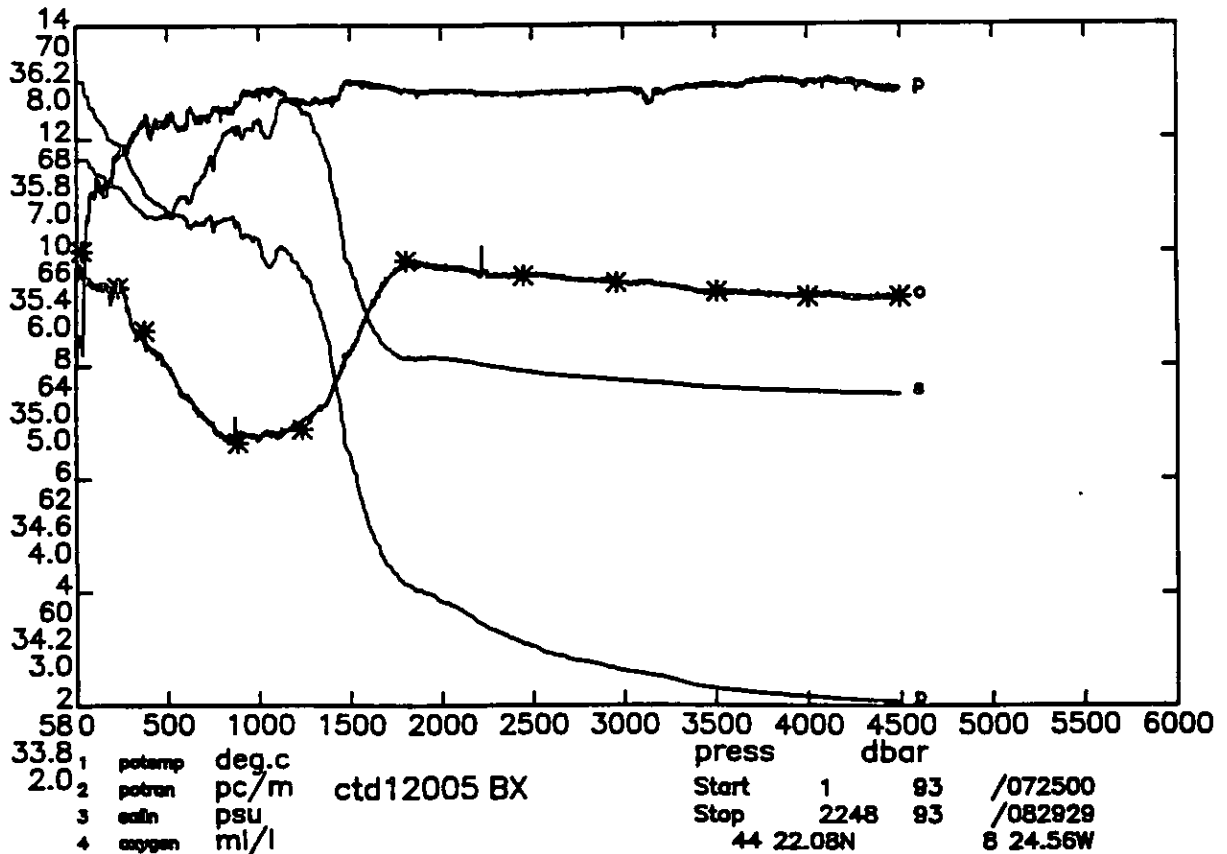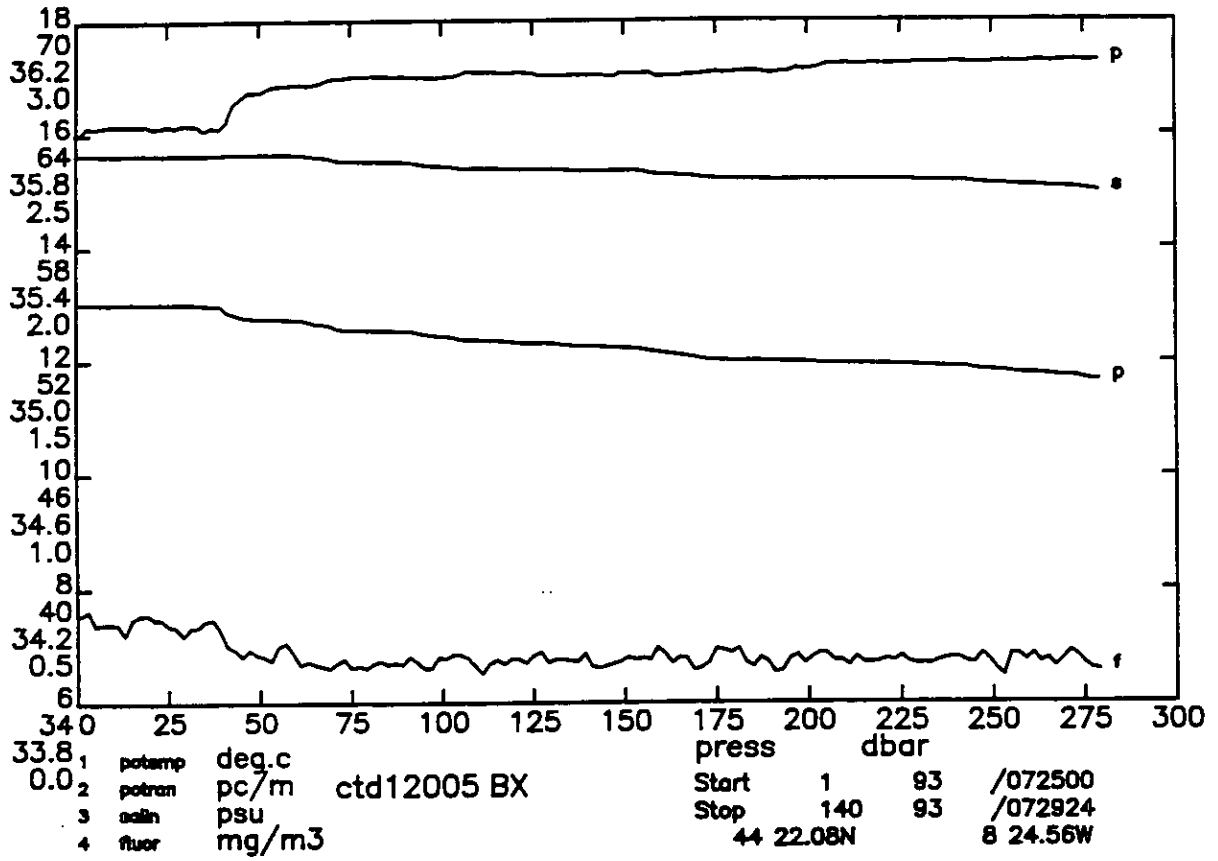

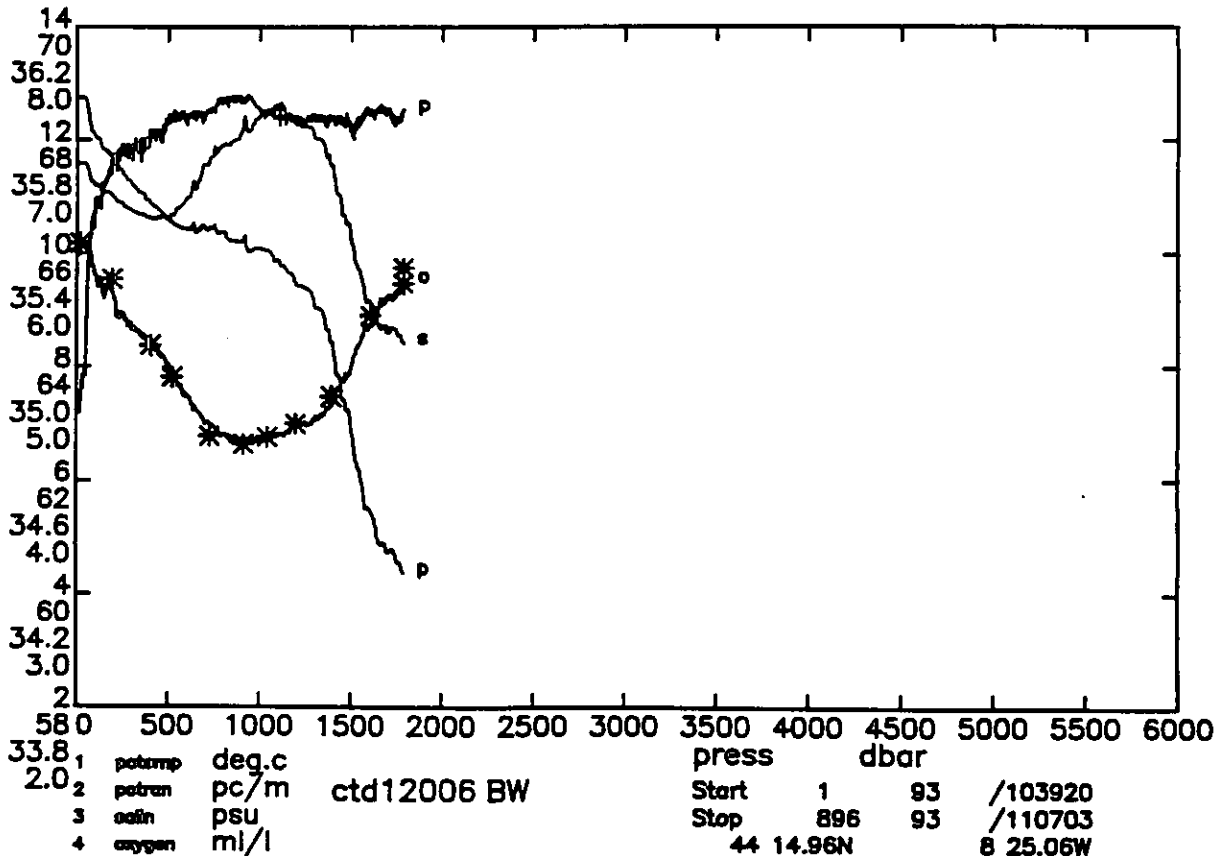
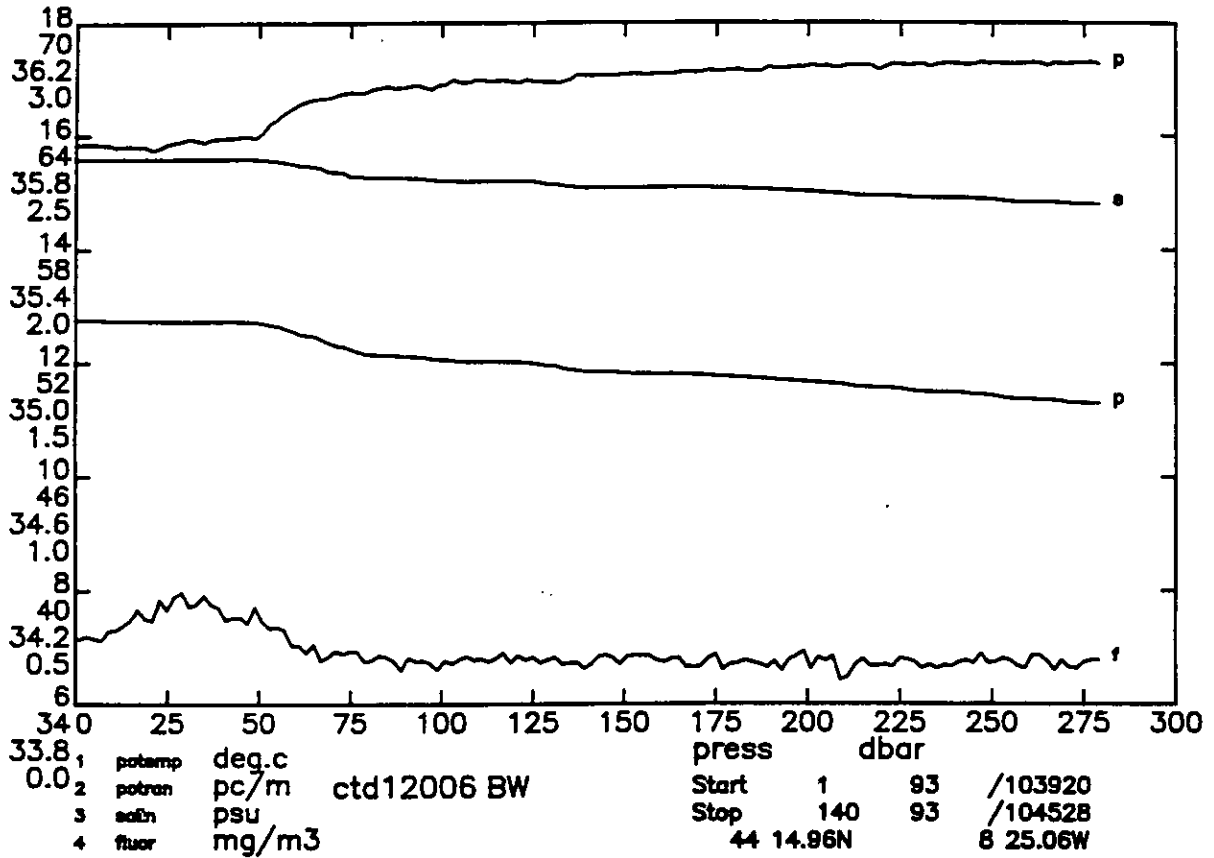


DISCOVERY CRUISE 189 STATION 12006

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	%/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	12.752	35.717	6.03	12.751	63.44	0.32	26.999	35.688	43.999	0.011	1500.4	10.	105.19	-9.999
20.	12.754	35.717	6.05	12.751	63.31	0.37	26.999	35.689	43.999	0.021	1500.6	20.	105.47	0.232
30.	12.750	35.717	6.09	12.746	63.78	0.46	27.000	35.690	44.000	0.032	1500.7	30.	105.68	0.529
40.	12.750	35.717	6.05	12.744	63.86	0.40	27.000	35.690	44.001	0.042	1500.9	40.	105.96	0.242
50.	12.737	35.715	6.08	12.730	64.00	0.40	27.002	35.692	44.004	0.053	1501.0	50.	106.08	0.744
60.	12.573	35.698	6.08	12.565	65.58	0.26	27.021	35.718	44.036	0.063	1500.6	60.	104.49	2.508
70.	12.367	35.673	6.06	12.358	66.09	0.22	27.042	35.748	44.073	0.074	1500.0	69.	102.77	2.587
80.	12.181	35.653	6.00	12.170	66.40	0.19	27.063	35.776	44.109	0.084	1499.5	79.	101.03	2.600
90.	12.147	35.650	5.88	12.135	66.58	0.18	27.068	35.782	44.116	0.094	1499.6	89.	100.87	1.205
100.	12.092	35.641	5.83	12.078	66.70	0.17	27.072	35.789	44.125	0.104	1499.6	99.	100.79	1.108
120.	12.040	35.640	5.74	12.024	66.82	0.20	27.082	35.801	44.139	0.124	1499.7	119.	100.39	1.267
140.	11.874	35.615	5.66	11.856	67.16	0.17	27.094	35.820	44.165	0.144	1499.4	139.	99.71	1.432
160.	11.830	35.616	5.66	11.809	67.27	0.19	27.104	35.832	44.178	0.164	1499.6	159.	99.30	1.269
180.	11.773	35.612	5.72	11.749	67.49	0.18	27.113	35.843	44.191	0.184	1499.8	178.	99.06	1.149
200.	11.682	35.600	5.63	11.656	67.69	0.19	27.121	35.855	44.208	0.204	1499.8	198.	98.74	1.203
220.	11.583	35.584	5.46	11.554	67.55	0.17	27.128	35.866	44.222	0.223	1499.7	218.	98.62	1.048
240.	11.516	35.579	5.43	11.485	67.83	0.18	27.137	35.878	44.237	0.243	1499.8	238.	98.27	1.221
260.	11.409	35.566	5.44	11.375	67.88	0.19	27.148	35.893	44.257	0.263	1499.8	258.	97.73	1.337
280.	11.333	35.557	5.37	11.298	67.75	0.16	27.155	35.904	44.270	0.282	1499.8	278.	97.52	1.109
300.	11.268	35.550	5.34	11.230	67.85	0.21	27.161	35.913	44.282	0.302	1499.9	297.	97.40	1.045
350.	11.117	35.537	5.28	11.073	67.76	0.18	27.180	35.939	44.314	0.350	1500.2	347.	96.80	1.129
400.	10.936	35.523	5.23	10.886	68.07	0.16	27.204	35.970	44.353	0.398	1500.4	396.	95.71	1.260
450.	10.821	35.527	5.10	10.765	68.15	0.17	27.229	36.000	44.387	0.446	1500.8	446.	94.56	1.274
500.	10.644	35.524	5.03	10.582	68.42	0.19	27.259	36.038	44.432	0.493	1501.0	495.	92.75	1.432
550.	10.542	35.559	4.86	10.474	68.42	0.18	27.306	36.088	44.486	0.538	1501.5	545.	89.53	1.729
600.	10.506	35.597	4.75	10.432	68.33	0.18	27.343	36.127	44.525	0.583	1502.3	594.	87.25	1.534
650.	10.442	35.627	4.63	10.362	68.41	0.16	27.378	36.165	44.566	0.626	1502.9	644.	85.03	1.521
700.	10.532	35.715	4.51	10.446	68.39	0.16	27.432	36.214	44.611	0.668	1504.2	693.	81.35	1.816
750.	10.563	35.760	4.47	10.470	68.54	0.18	27.463	36.243	44.638	0.708	1505.1	743.	79.75	1.382
800.	10.471	35.781	4.41	10.372	68.72	0.17	27.497	36.281	44.680	0.747	1505.7	792.	77.64	1.500
850.	10.332	35.793	4.36	10.227	68.70	0.19	27.532	36.322	44.726	0.785	1506.0	841.	75.34	1.539
900.	10.317	35.830	4.35	10.206	68.70	0.16	27.564	36.354	44.759	0.822	1506.8	891.	73.52	1.430
950.	10.154	35.836	4.34	10.037	68.75	0.18	27.599	36.396	44.807	0.858	1507.1	940.	71.16	1.548
1000.	10.214	35.886	4.36	10.090	68.53	0.14	27.628	36.423	44.831	0.894	1508.2	990.	69.74	1.331
1100.	10.013	35.886	4.40	9.878	68.61	0.16	27.666	36.469	44.885	0.963	1509.1	1088.	68.21	1.150
1200.	9.606	35.859	4.50	9.461	68.38	0.14	27.715	36.536	44.970	1.029	1509.3	1187.	64.94	1.373
1300.	9.219	35.810	4.54	9.065	68.37	0.15	27.742	36.581	45.032	1.094	1509.5	1286.	63.55	1.108
1400.	8.521	35.704	4.69	8.362	68.43	0.14	27.771	36.642	45.123	1.157	1508.4	1384.	60.91	1.268
1500.	7.055	35.450	4.99	6.900	68.15	0.17	27.787	36.729	45.275	1.216	1504.2	1483.	56.48	1.461
1600.	5.657	35.232	5.35	5.507	68.46	0.20	27.798	36.809	45.421	1.269	1500.1	1581.	51.98	1.433
1700.	4.893	35.122	5.61	4.743	68.56	0.13	27.802	36.853	45.502	1.320	1498.6	1679.	49.88	1.076

Sample data

1788.	4.524	35.088	5.87	4.369
1607.	5.603	35.224	5.45	5.453
1393.	8.577	35.705	4.74	8.418
1199.	9.615	35.860	4.50	9.471
1042.	10.179	35.893	4.38	10.050
913.	10.409	35.803	4.32	10.295
728.	10.544	35.740	4.39	10.454
523.	10.595	35.530	4.91	10.531
405.	10.926	35.522	5.19	10.876
195.	11.700	35.612	5.77	11.675
20.	12.753	35.718	6.09	12.750

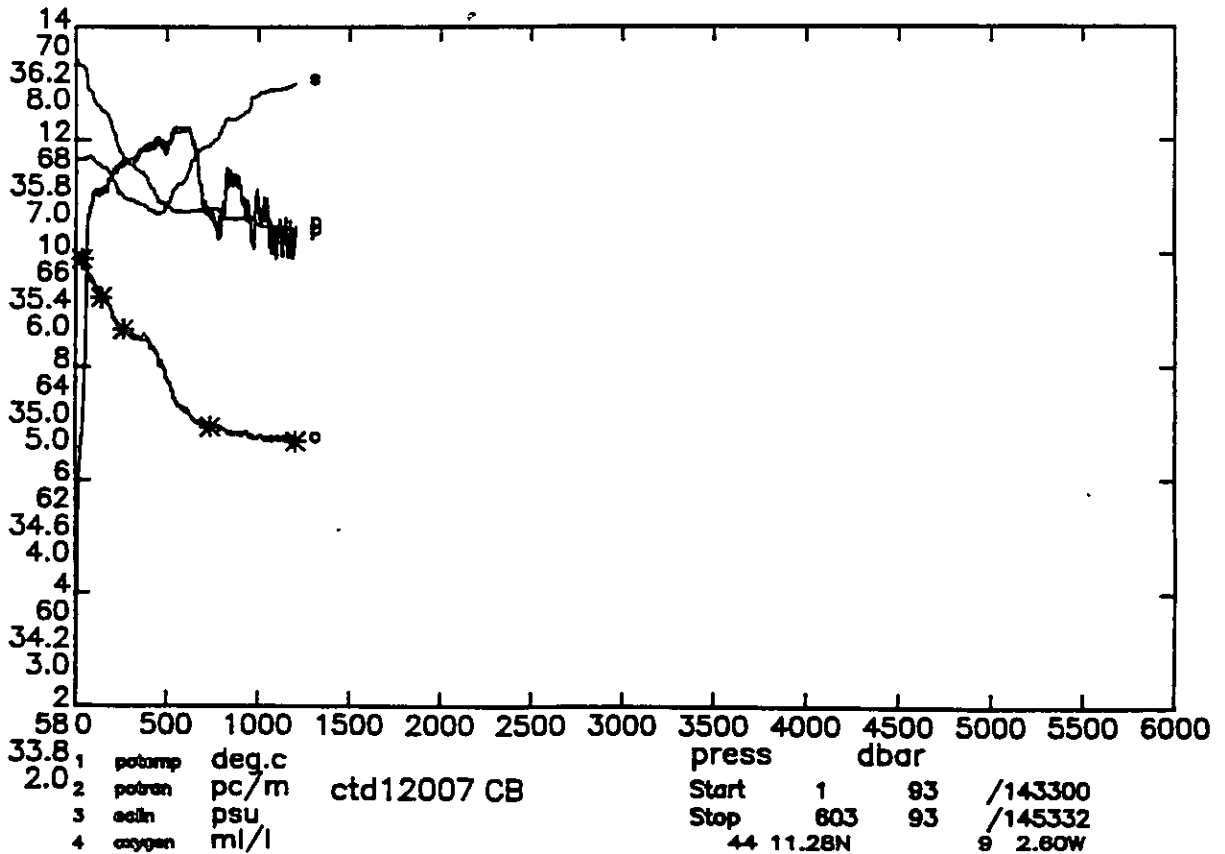
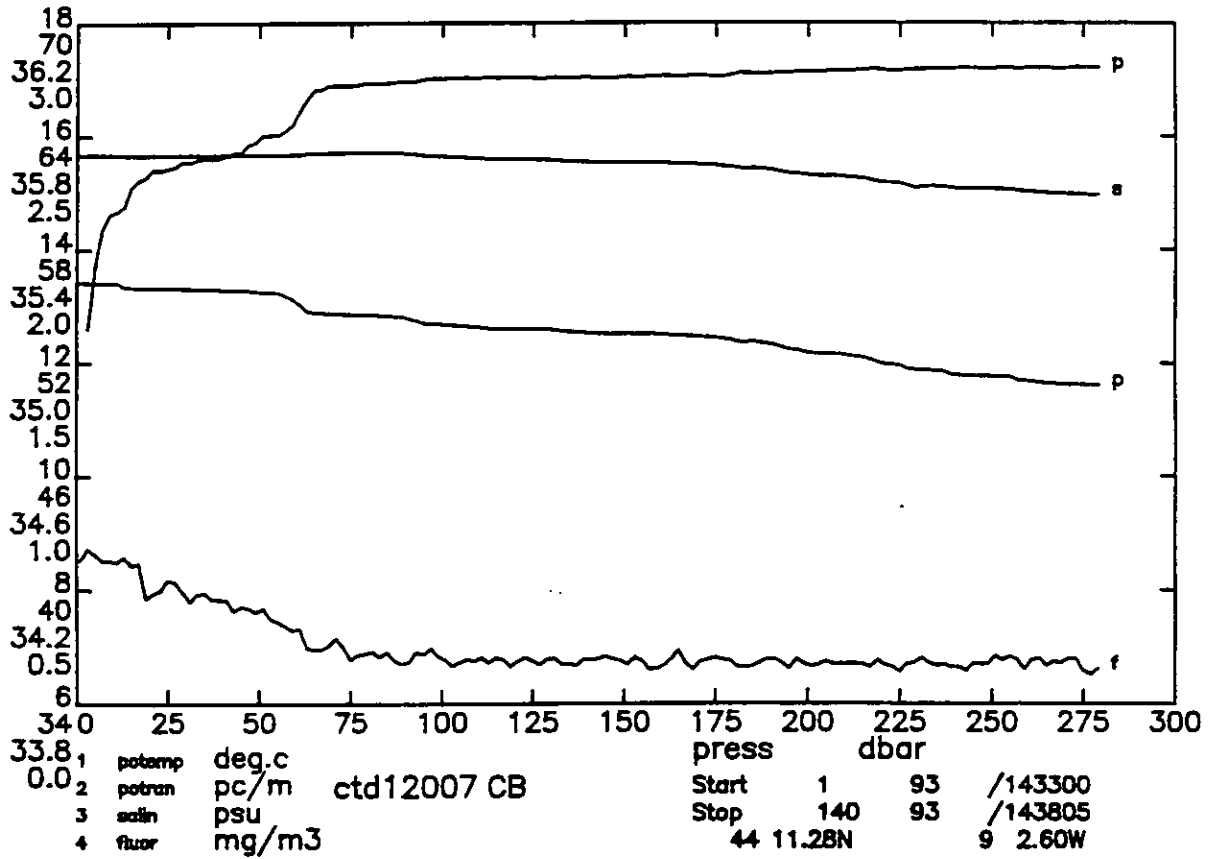


DISCOVERY CRUISE 189 STATION 12007

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	13.424	35.732	5.97	13.423	59.94	0.62	26.874	35.538	43.824	0.012	1502.6	10.	117.02	-9.999
20.	13.337	35.731	5.95	13.334	62.03	0.47	26.891	35.559	43.848	0.023	1502.5	20.	115.69	2.334
30.	13.327	35.731	5.92	13.323	62.58	0.47	26.894	35.561	43.851	0.035	1502.6	30.	115.77	0.858
40.	13.312	35.732	5.93	13.306	62.87	0.46	26.898	35.566	43.857	0.046	1502.8	40.	115.68	1.153
50.	13.275	35.733	5.93	13.268	63.85	0.41	26.907	35.576	43.868	0.058	1502.8	50.	115.15	1.661
60.	13.102	35.735	5.87	13.094	64.95	0.33	26.943	35.620	43.918	0.069	1502.4	60.	111.95	3.415
70.	12.897	35.742	5.78	12.887	66.67	0.27	26.991	35.675	43.980	0.080	1501.9	70.	107.75	3.873
80.	12.876	35.741	5.77	12.865	66.80	0.23	26.995	35.680	43.986	0.091	1502.0	79.	107.66	1.145
90.	12.821	35.737	5.76	12.808	66.87	0.18	27.003	35.690	43.998	0.102	1502.0	89.	107.19	1.590
100.	12.705	35.726	5.74	12.691	67.03	0.20	27.018	35.710	44.022	0.112	1501.7	99.	106.02	2.211
120.	12.625	35.716	5.69	12.609	67.08	0.18	27.026	35.721	44.037	0.134	1501.8	119.	105.79	1.167
140.	12.547	35.705	5.65	12.528	67.09	0.19	27.034	35.732	44.051	0.155	1501.8	139.	105.64	1.101
160.	12.520	35.701	5.61	12.499	67.16	0.16	27.037	35.736	44.056	0.176	1502.1	159.	105.93	0.687
180.	12.401	35.685	5.56	12.377	67.25	0.17	27.048	35.753	44.077	0.197	1502.0	178.	105.36	1.383
200.	12.199	35.659	5.49	12.173	67.38	0.17	27.068	35.781	44.113	0.218	1501.6	198.	104.00	1.795
220.	12.011	35.635	5.41	11.982	67.47	0.18	27.086	35.807	44.146	0.239	1501.3	218.	102.78	1.726
240.	11.816	35.612	5.36	11.784	67.57	0.16	27.106	35.835	44.182	0.259	1500.9	238.	101.33	1.825
260.	11.718	35.601	5.35	11.684	67.62	0.17	27.117	35.850	44.201	0.279	1500.9	258.	100.81	1.340
280.	11.646	35.594	5.31	11.610	67.63	0.16	27.125	35.861	44.215	0.300	1500.9	278.	100.50	1.188
300.	11.627	35.591	5.29	11.588	67.64	0.18	27.127	35.864	44.219	0.320	1501.2	297.	100.88	0.515
350.	11.496	35.577	5.24	11.451	67.77	0.18	27.142	35.884	44.244	0.370	1501.6	347.	100.75	0.994
400.	11.282	35.555	5.22	11.231	67.84	0.15	27.165	35.917	44.286	0.420	1501.6	396.	99.67	1.268
450.	10.980	35.541	5.11	10.923	68.01	0.17	27.211	35.976	44.356	0.470	1501.4	446.	96.37	1.753
500.	10.903	35.581	4.90	10.840	67.80	0.17	27.257	36.024	44.408	0.517	1502.0	495.	93.25	1.715
550.	10.816	35.635	4.68	10.748	68.21	0.18	27.316	36.086	44.473	0.563	1502.6	545.	88.88	1.945
600.	10.809	35.661	4.62	10.734	68.16	0.12	27.339	36.109	44.496	0.607	1503.4	594.	87.99	1.202
650.	10.831	35.744	4.54	10.749	67.86	0.14	27.401	36.170	44.554	0.650	1504.4	644.	83.47	1.969
700.	10.864	35.772	4.49	10.776	66.80	0.15	27.418	36.185	44.568	0.691	1505.4	693.	83.18	1.024
750.	10.870	35.790	4.48	10.775	66.63	0.15	27.432	36.199	44.582	0.733	1506.3	743.	83.11	0.950
800.	10.726	35.846	4.47	10.626	66.77	0.16	27.502	36.275	44.663	0.774	1506.7	792.	77.59	2.135
850.	10.724	35.873	4.42	10.617	67.29	0.17	27.525	36.298	44.686	0.812	1507.5	841.	76.70	1.203
900.	10.728	35.884	4.42	10.614	67.18	0.18	27.534	36.307	44.695	0.851	1508.4	891.	77.08	0.766
950.	10.749	35.911	4.38	10.628	66.54	0.17	27.553	36.324	44.711	0.889	1509.3	940.	76.68	1.058
1000.	10.634	35.958	4.38	10.507	66.78	0.17	27.611	36.387	44.778	0.926	1509.8	990.	72.26	1.954
1100.	10.597	35.976	4.39	10.458	66.46	0.14	27.634	36.412	44.805	0.998	1511.3	1088.	72.47	0.876
1200.	10.488	35.999	4.32	10.336	66.17	0.15	27.673	36.456	44.853	1.071	1512.6	1187.	71.02	1.151

Sample data

1205.	10.492	36.001	4.34	10.339
738.	10.865	35.784	4.47	10.772
262.	11.697	35.602	5.33	11.663
141.	12.542	35.707	5.61	12.523
36.	13.320	35.732	5.95	13.315

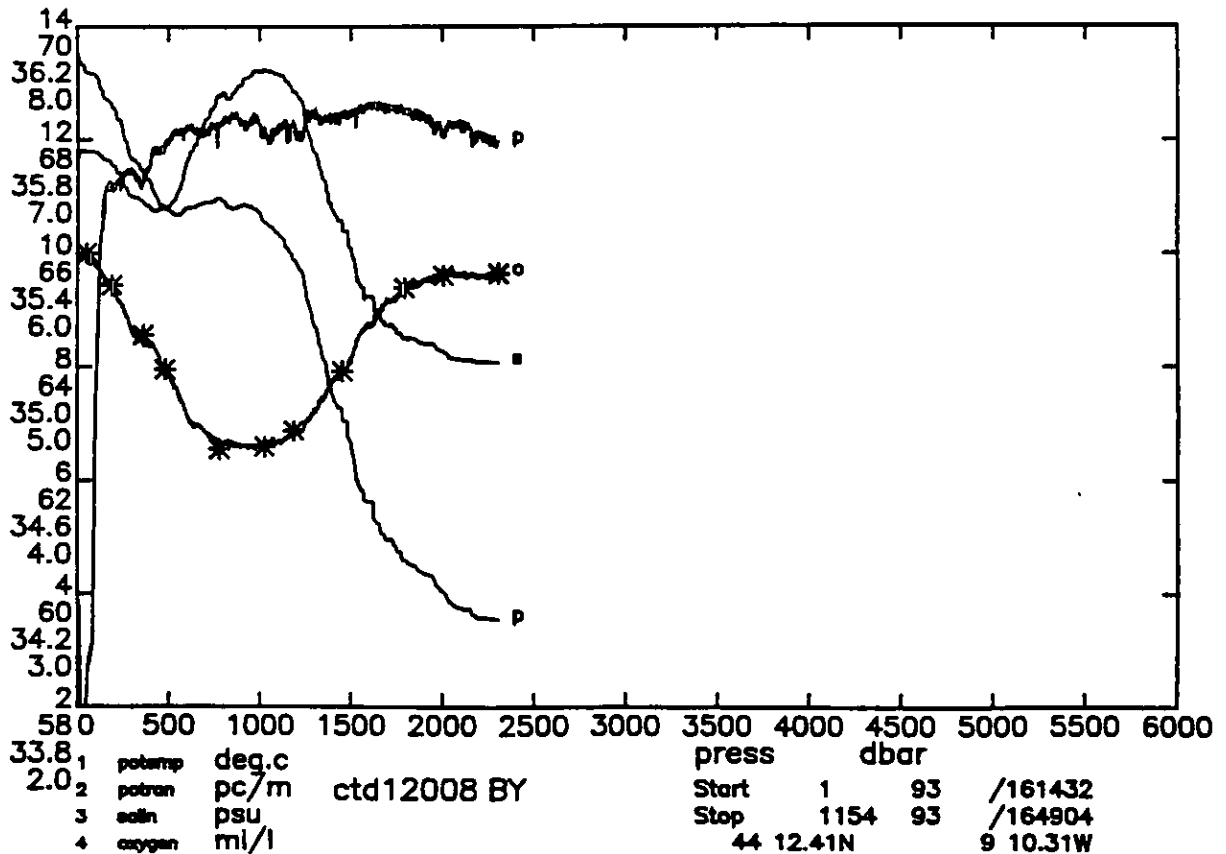
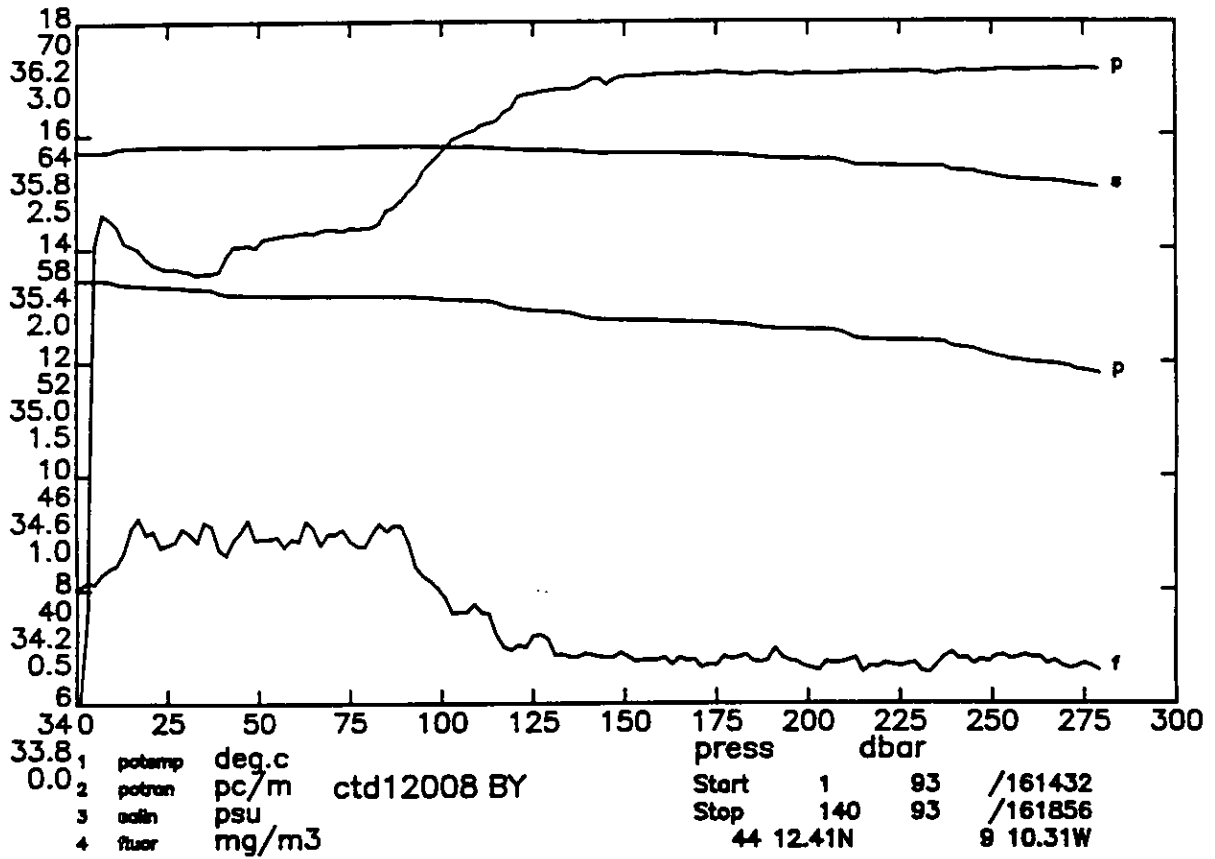




DISCOVERY CRUISE 189 STATION 12008



pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	%/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
10.	13.431	35.747	5.94	13.429	59.41	0.60	26.884	35.548	43.834	0.012	1502.7	10.	116.07	-9.999
20.	13.362	35.760	5.94	13.359	57.37	0.75	26.909	35.575	43.863	0.023	1502.6	20.	114.05	2.787
30.	13.326	35.762	6.00	13.322	56.87	0.76	26.918	35.585	43.875	0.035	1502.7	30.	113.47	1.714
40.	13.234	35.763	6.03	13.228	57.21	0.67	26.937	35.608	43.901	0.046	1502.5	40.	111.92	2.483
50.	13.204	35.761	6.01	13.197	58.29	0.72	26.942	35.614	43.908	0.057	1502.6	50.	111.75	1.257
60.	13.194	35.760	6.00	13.185	58.79	0.72	26.944	35.617	43.911	0.068	1502.7	60.	111.86	0.795
70.	13.189	35.760	5.91	13.179	59.02	0.74	26.946	35.618	43.913	0.079	1502.9	69.	112.05	0.611
80.	13.185	35.760	5.97	13.174	59.11	0.71	26.947	35.620	43.914	0.091	1503.0	79.	112.24	0.614
90.	13.177	35.760	5.93	13.165	60.76	0.74	26.948	35.621	43.917	0.102	1503.2	89.	112.41	0.666
100.	13.138	35.757	5.91	13.124	63.12	0.49	26.954	35.629	43.926	0.113	1503.2	99.	112.10	1.423
120.	12.973	35.748	5.85	12.956	65.70	0.25	26.981	35.663	43.965	0.135	1503.0	119.	110.13	2.068
140.	12.802	35.736	5.80	12.783	66.83	0.22	27.007	35.695	44.004	0.157	1502.7	139.	108.26	2.029
160.	12.740	35.732	5.76	12.718	67.16	0.20	27.017	35.707	44.019	0.179	1502.8	159.	107.89	1.262
180.	12.678	35.724	5.74	12.654	67.18	0.20	27.023	35.717	44.031	0.200	1503.0	178.	107.81	1.047
200.	12.576	35.709	5.66	12.549	67.19	0.16	27.033	35.731	44.049	0.222	1502.9	198.	107.44	1.262
220.	12.395	35.685	5.59	12.366	67.26	0.17	27.050	35.755	44.080	0.243	1502.6	218.	106.33	1.678
240.	12.297	35.669	5.56	12.265	67.33	0.21	27.058	35.767	44.096	0.265	1502.6	238.	106.11	1.141
260.	12.031	35.635	5.49	11.997	67.40	0.21	27.083	35.803	44.142	0.286	1502.0	258.	104.16	2.048
280.	11.812	35.612	5.42	11.775	67.44	0.15	27.108	35.837	44.185	0.306	1501.5	278.	102.25	2.027
300.	11.707	35.602	5.33	11.668	67.41	0.17	27.120	35.854	44.205	0.327	1501.5	297.	101.57	1.435
350.	11.529	35.587	5.24	11.484	67.17	0.16	27.143	35.884	44.243	0.377	1501.7	347.	100.61	1.242
400.	11.294	35.561	5.21	11.243	67.59	0.19	27.168	35.919	44.287	0.427	1501.7	396.	99.43	1.293
450.	10.931	35.557	5.08	10.875	67.77	0.19	27.232	35.998	44.381	0.476	1501.2	446.	94.35	2.065
500.	10.835	35.566	4.93	10.773	67.96	0.19	27.257	36.028	44.414	0.523	1501.7	495.	93.13	1.292
550.	10.748	35.615	4.79	10.680	68.15	0.19	27.313	36.086	44.475	0.568	1502.3	545.	89.09	1.885
600.	10.867	35.723	4.59	10.792	68.25	0.14	27.377	36.144	44.527	0.612	1503.7	594.	84.52	1.978
650.	10.892	35.782	4.50	10.810	68.18	0.14	27.419	36.185	44.567	0.653	1504.7	644.	81.82	1.633
700.	10.980	35.871	4.43	10.891	68.10	0.16	27.474	36.235	44.613	0.693	1505.9	693.	78.11	1.830
750.	11.017	35.917	4.37	10.922	68.22	0.14	27.504	36.264	44.640	0.732	1506.9	743.	76.59	1.314
800.	11.024	35.967	4.32	10.922	68.29	0.11	27.544	36.302	44.677	0.769	1507.8	792.	74.23	1.567
850.	10.892	35.963	4.32	10.783	68.42	0.11	27.565	36.329	44.710	0.807	1508.2	841.	73.27	1.229
900.	10.952	35.993	4.31	10.836	68.30	0.14	27.579	36.341	44.719	0.843	1509.3	891.	73.36	0.895
950.	10.947	36.026	4.31	10.825	68.30	0.11	27.607	36.368	44.746	0.879	1510.1	940.	72.04	1.325
1000.	10.829	36.044	4.31	10.701	68.27	0.13	27.643	36.410	44.792	0.915	1510.6	990.	69.66	1.568
1100.	10.488	36.032	4.34	10.350	68.14	0.12	27.697	36.478	44.875	0.982	1511.0	1088.	66.38	1.397
1200.	9.980	35.967	4.41	9.832	68.07	0.13	27.737	36.540	44.958	1.047	1510.8	1187.	63.87	1.289
1300.	8.873	35.757	4.62	8.723	68.46	0.15	27.756	36.611	45.076	1.110	1508.1	1286.	61.29	1.277
1400.	7.659	35.553	4.87	7.509	68.41	0.16	27.781	36.693	45.212	1.169	1505.0	1384.	57.27	1.425
1500.	6.839	35.415	5.05	6.687	68.44	0.18	27.790	36.742	45.298	1.226	1503.4	1483.	55.53	1.089
1600.	5.783	35.247	5.35	5.631	68.60	0.14	27.795	36.800	45.406	1.279	1500.6	1581.	52.73	1.215
1700.	5.103	35.144	5.57	4.950	68.56	0.18	27.796	36.836	45.475	1.331	1499.5	1679.	51.29	0.972
1800.	4.739	35.100	5.68	4.580	68.53	0.12	27.803	36.862	45.520	1.382	1499.6	1778.	50.28	0.873
1900.	4.518	35.082	5.76	4.352	68.46	0.15	27.814	36.885	45.553	1.432	1500.3	1876.	49.41	0.830
2000.	4.212	35.055	5.81	4.041	68.06	0.14	27.826	36.913	45.597	1.481	1500.7	1974.	47.92	0.939
2100.	3.921	35.025	5.80	3.745	68.23	0.14	27.832	36.936	45.634	1.528	1501.1	2073.	46.83	0.849
2200.	3.765	35.016	5.78	3.581	68.10	0.17	27.842	36.954	45.660	1.575	1502.2	2171.	46.08	0.767
2300.	3.734	35.012	5.82	3.541	67.91	0.15	27.843	36.957	45.666	1.621	1503.7	2269.	46.70	0.340



Sample data



2306.	3.735	35.012	5.81	3.541
2004.	4.202	35.052	5.80	4.030
1792.	4.758	35.107	5.69	4.600
1453.	7.419	35.520	4.96	7.265
1189.	10.015	35.961	4.44	9.869
1027.	10.682	36.041	4.30	10.551
780.	11.069	35.963	4.28	10.969
481.	10.859	35.562	4.98	10.799
362.	11.480	35.584	5.28	11.433
191.	12.591	35.705	5.72	12.565
50.	13.201	35.758	6.00	13.194

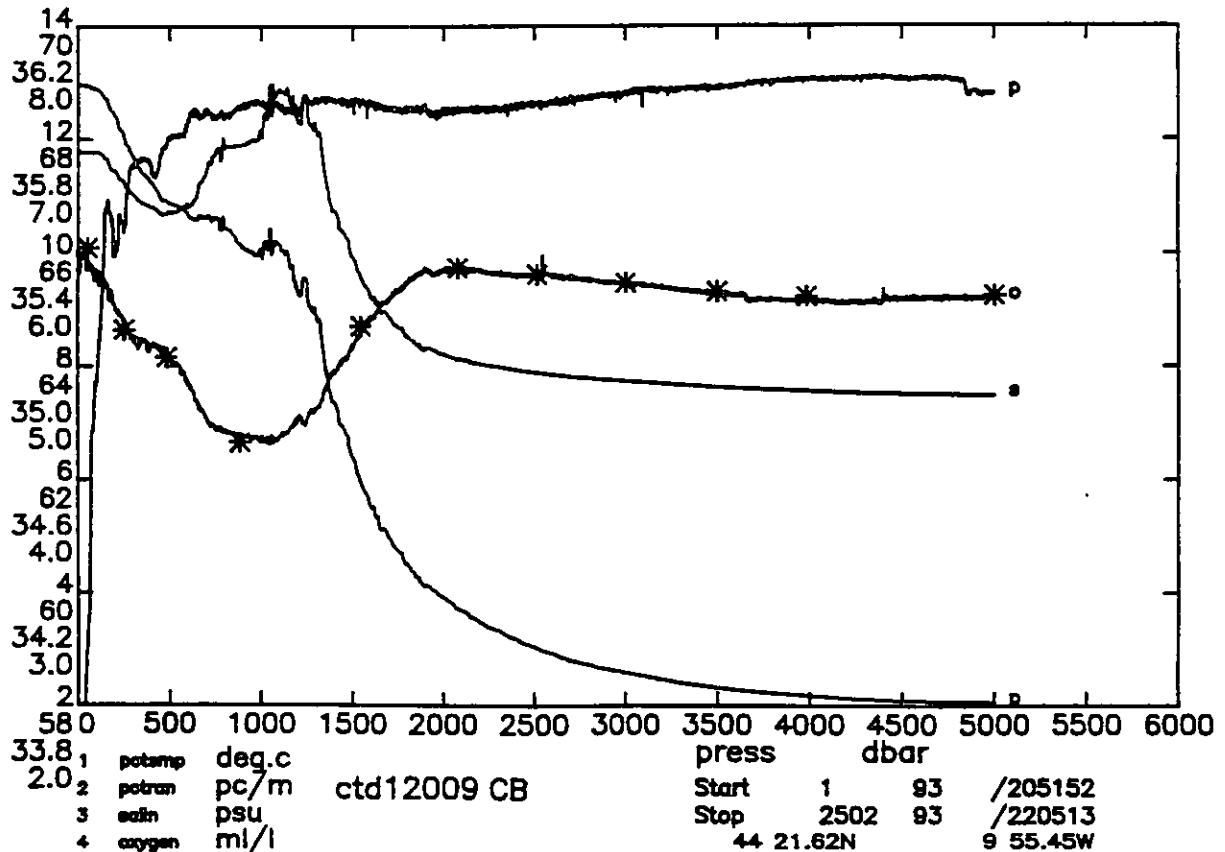
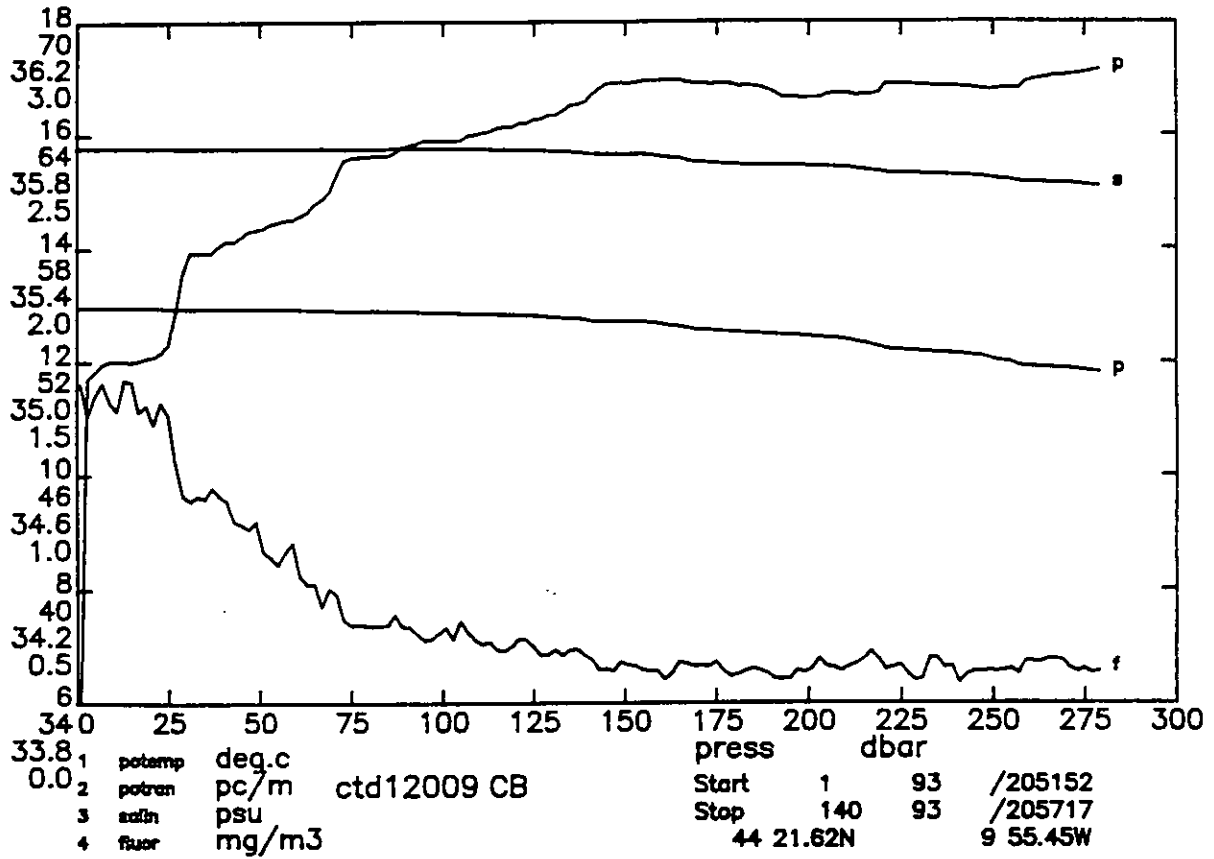


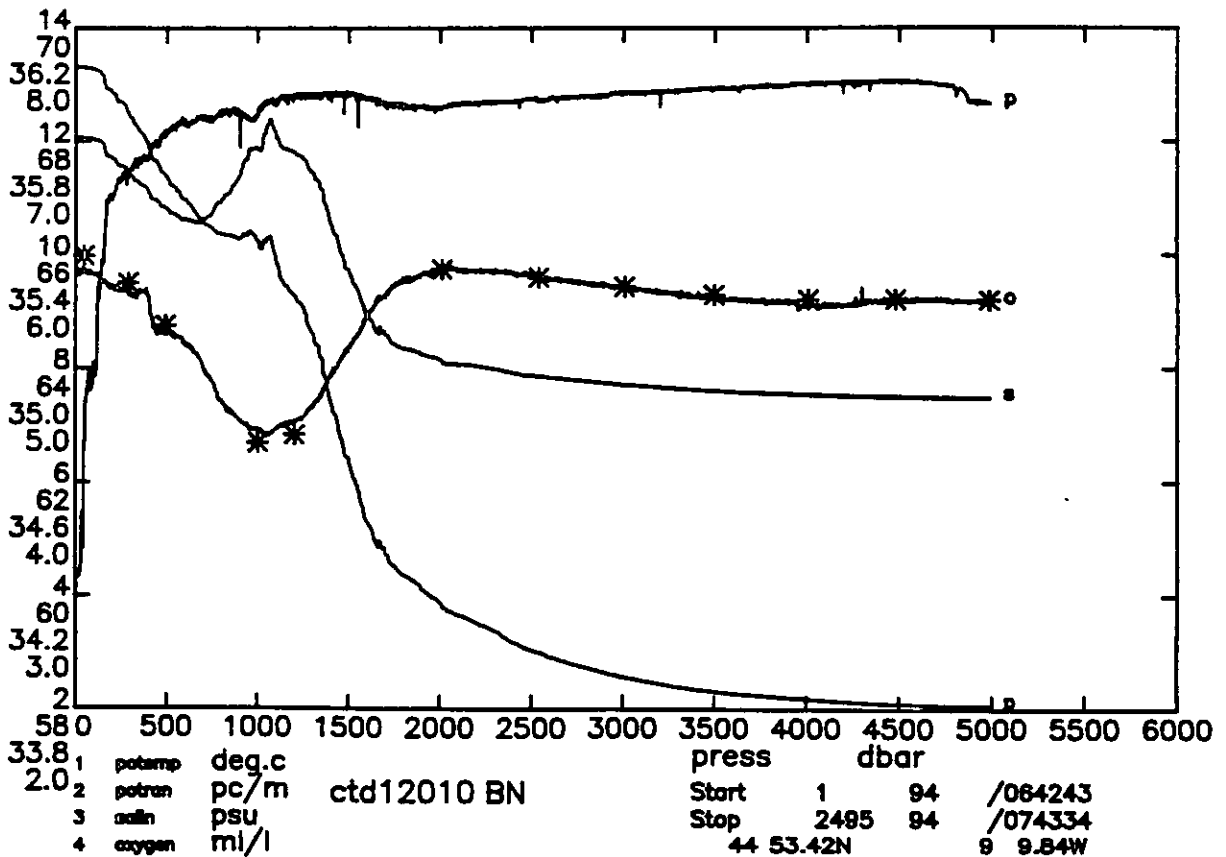
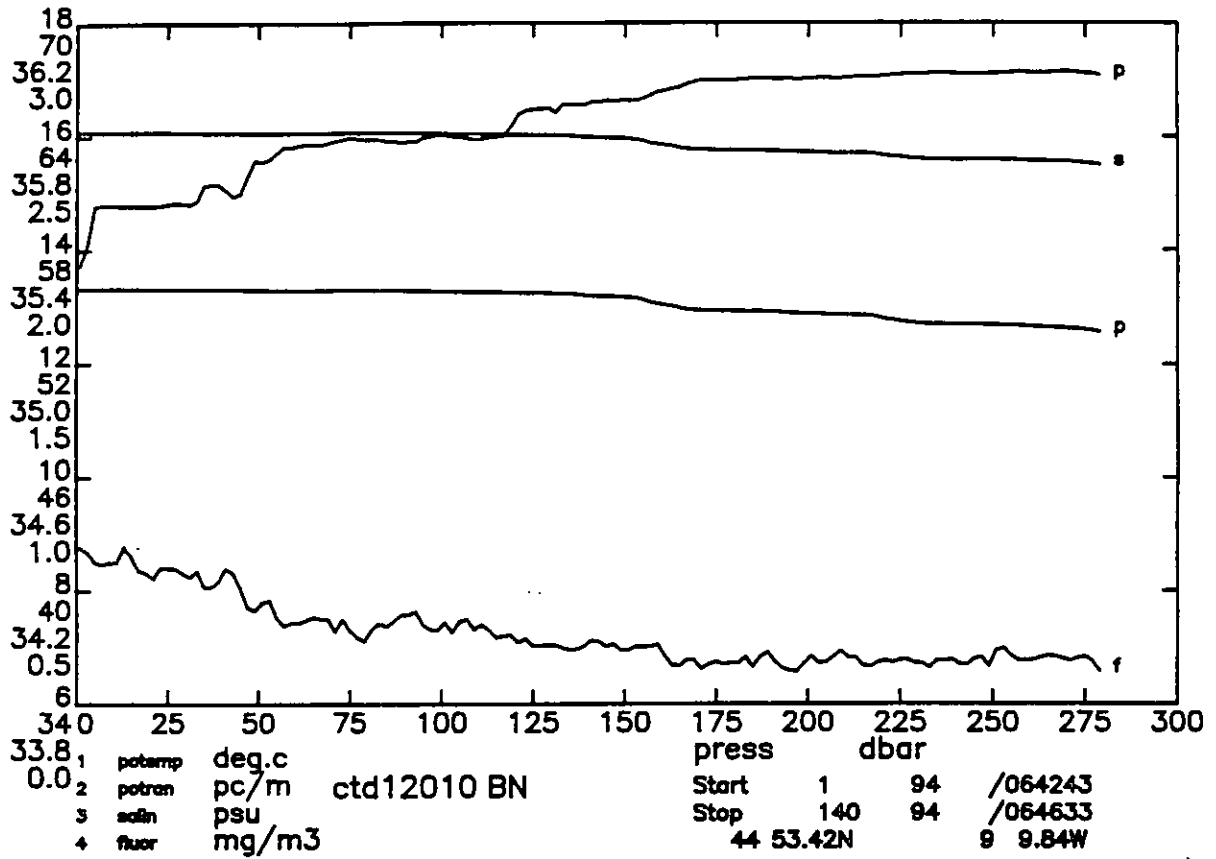


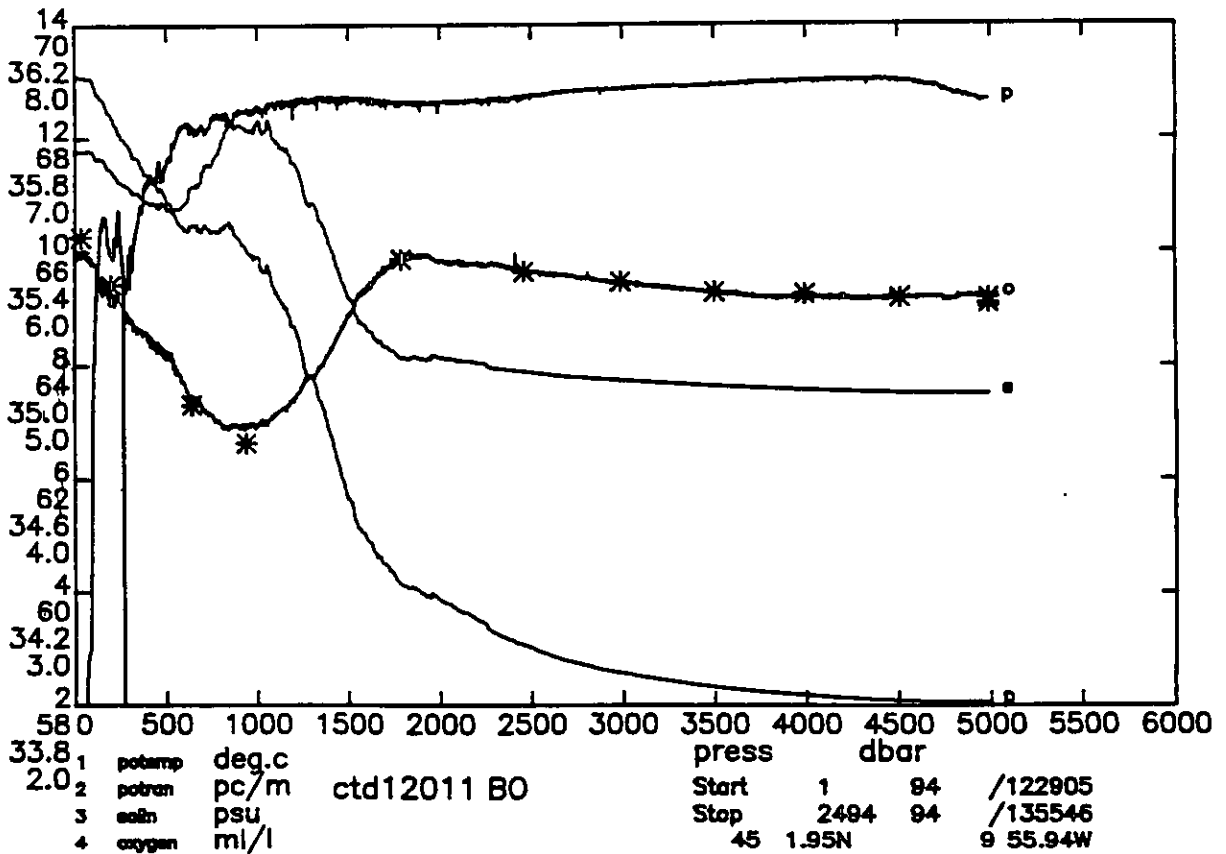
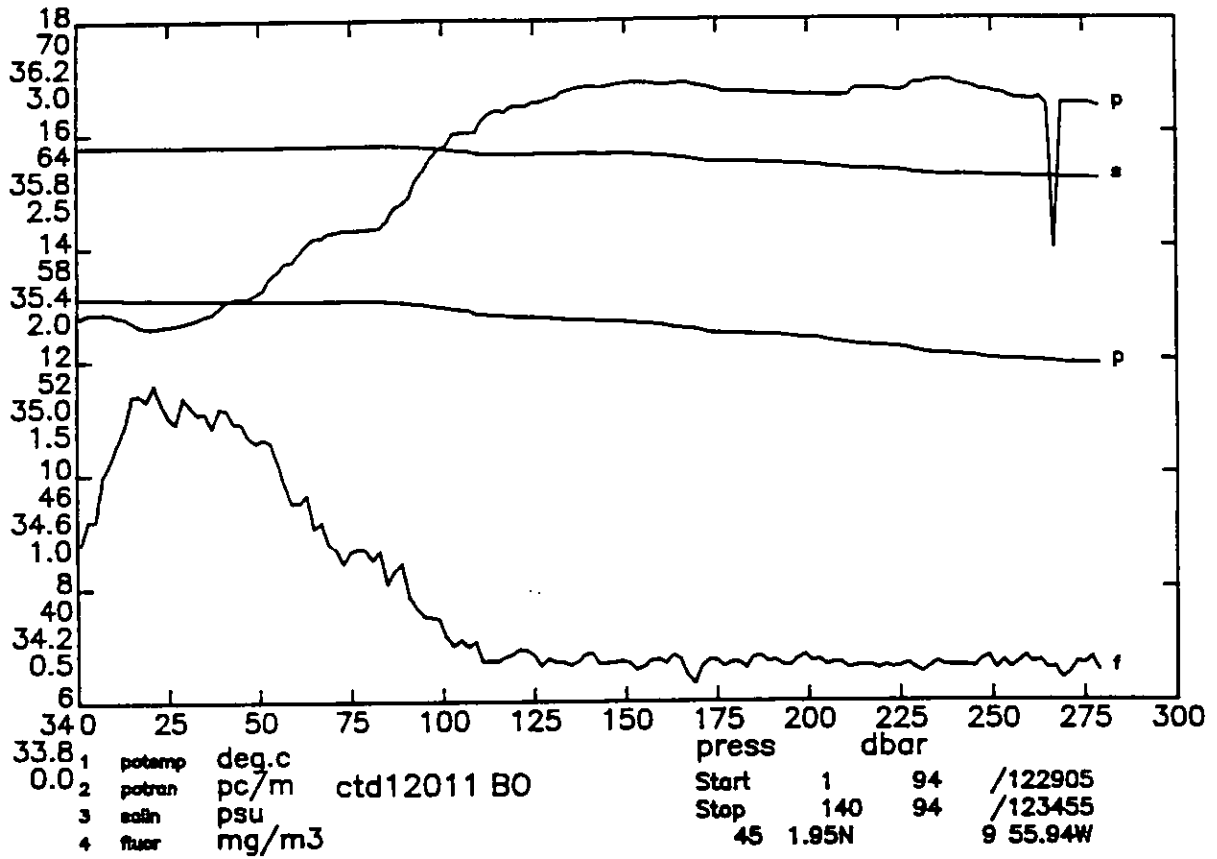


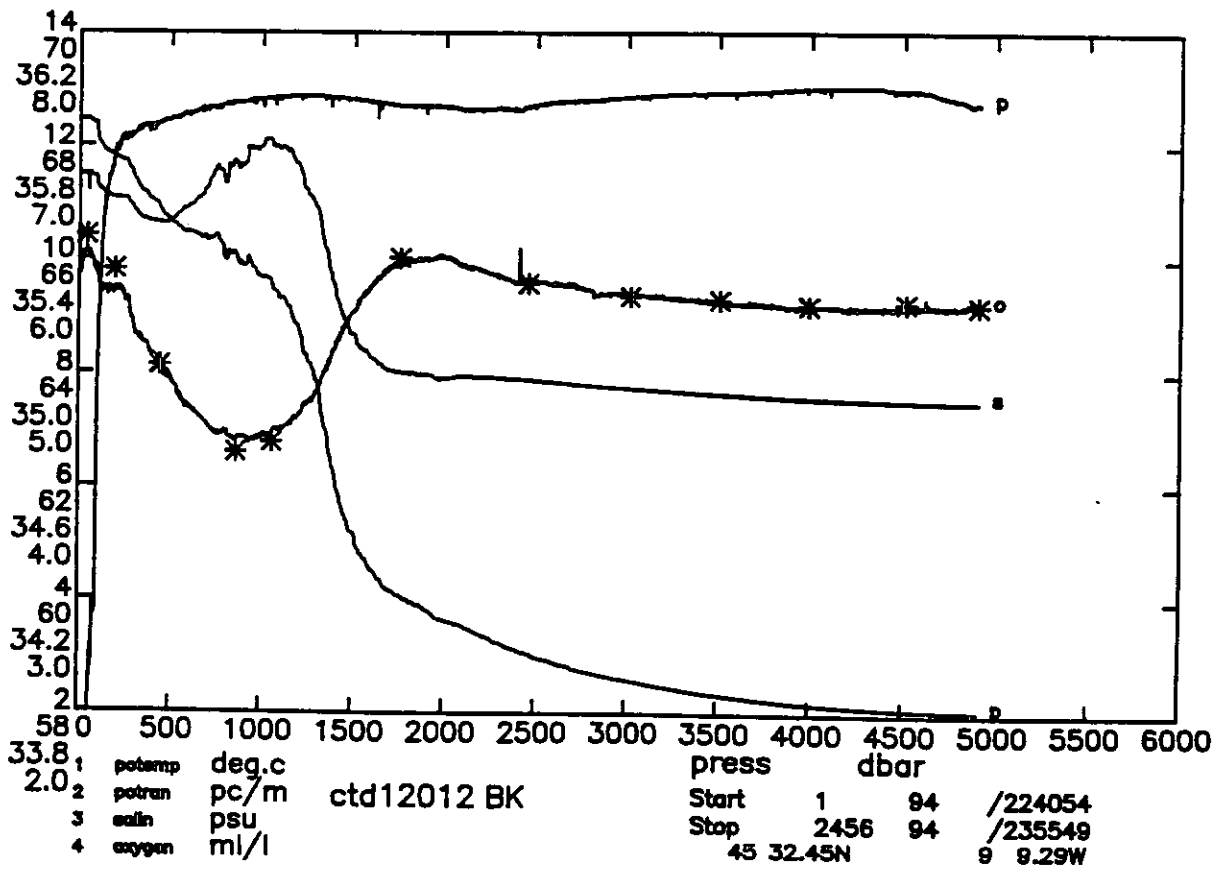
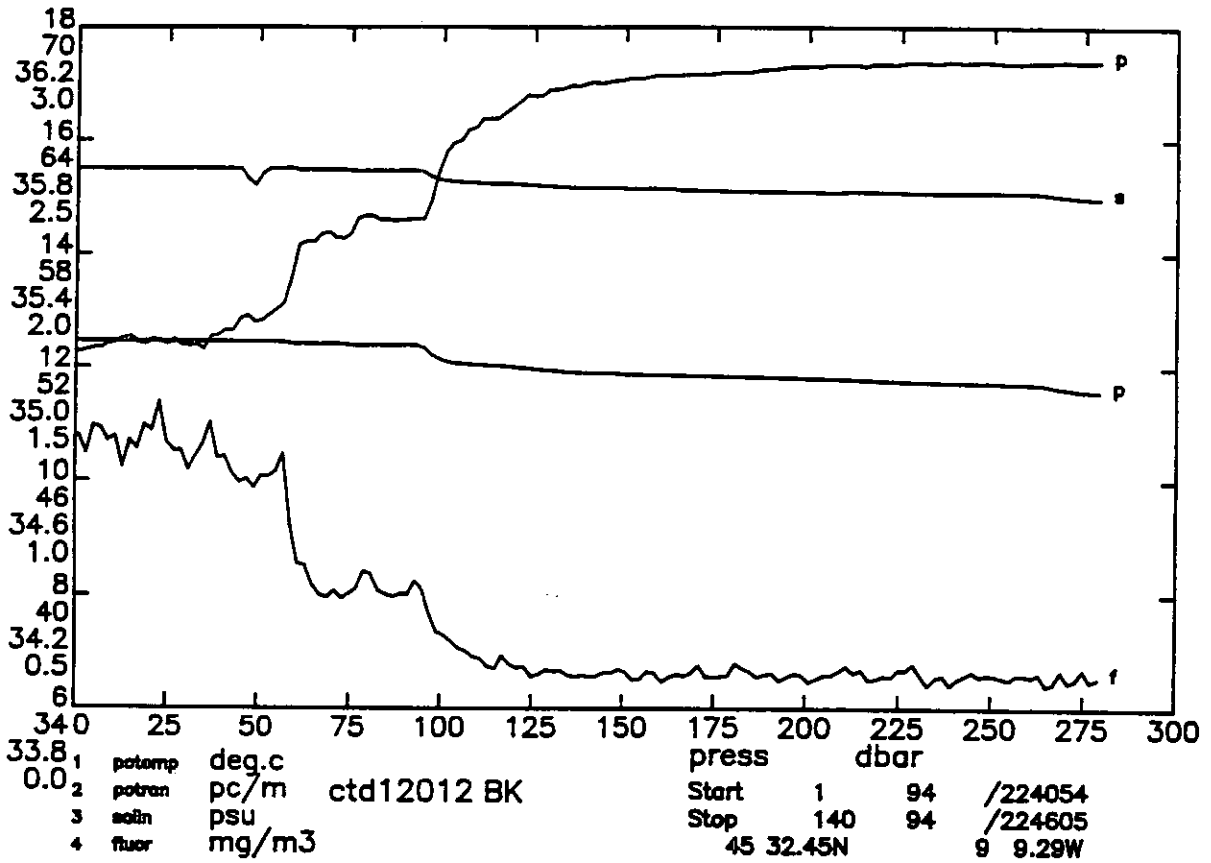


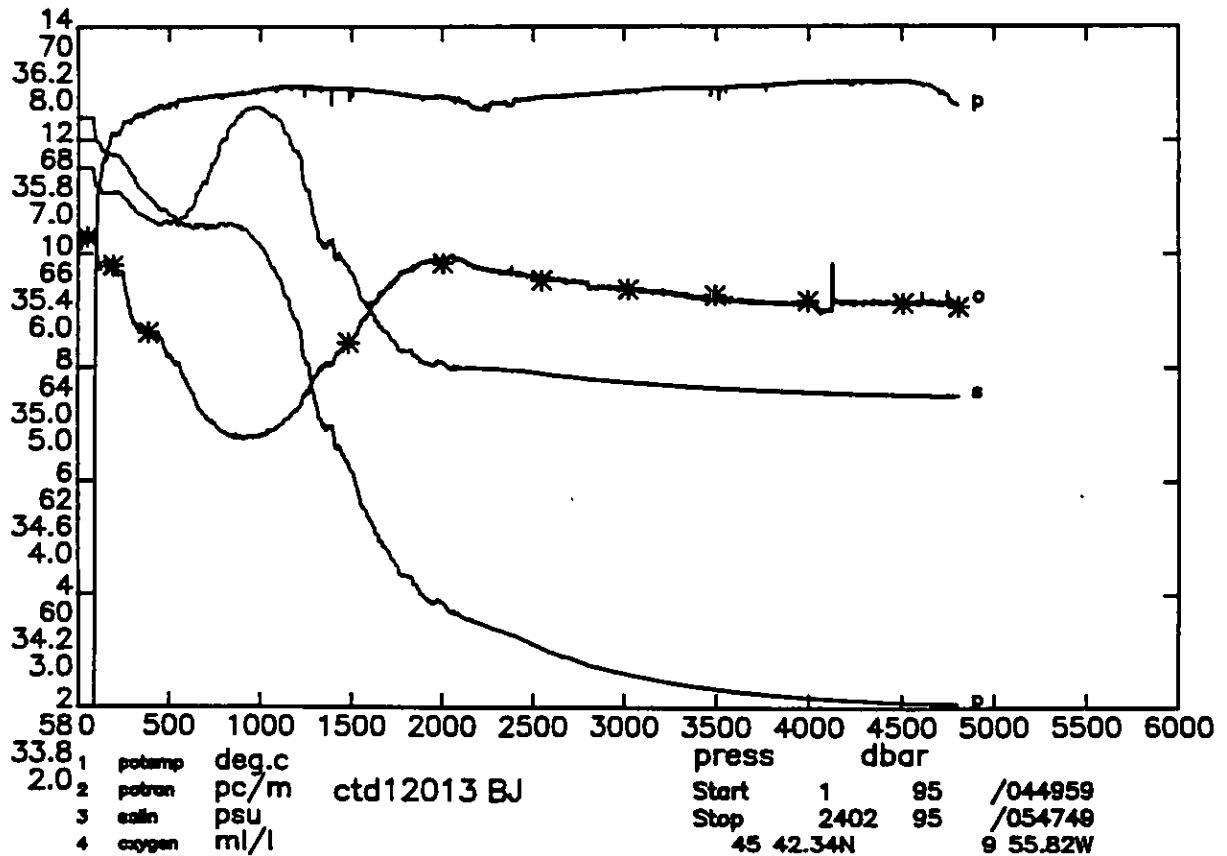
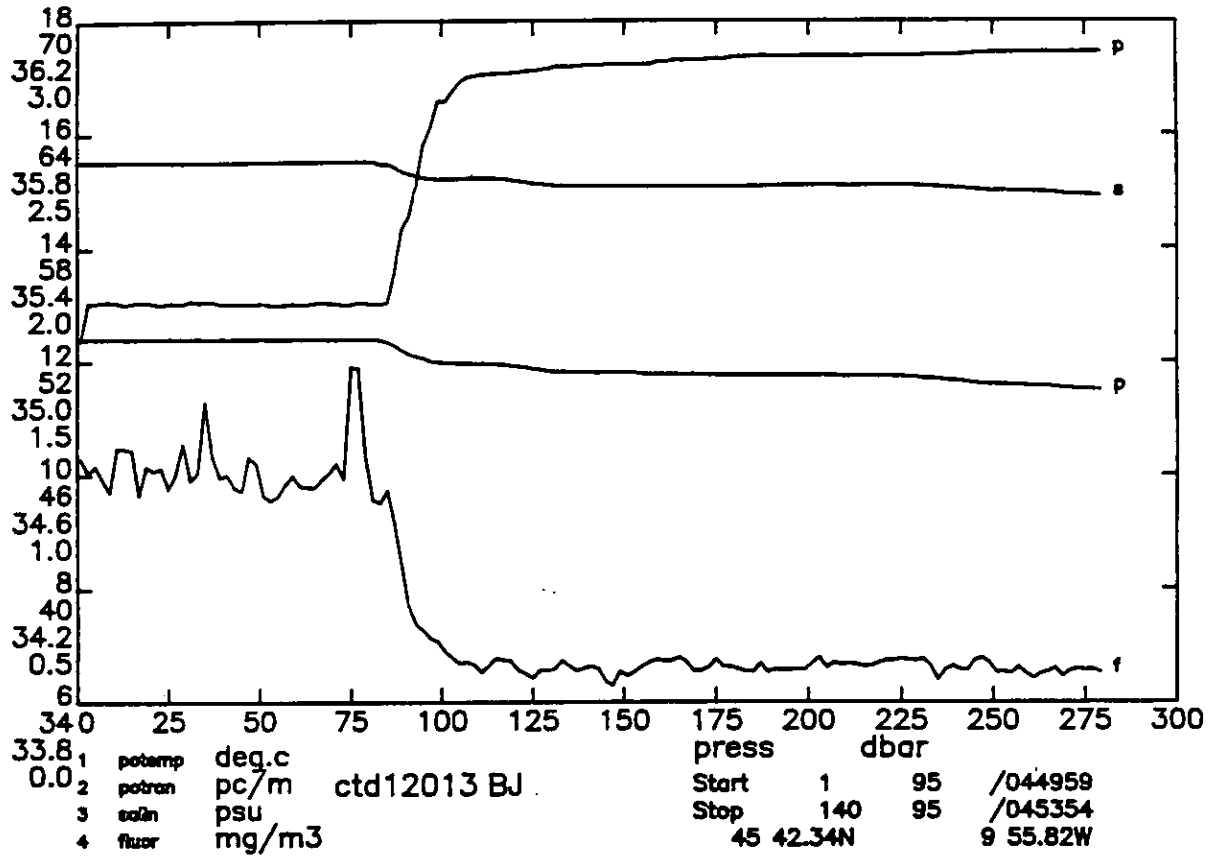


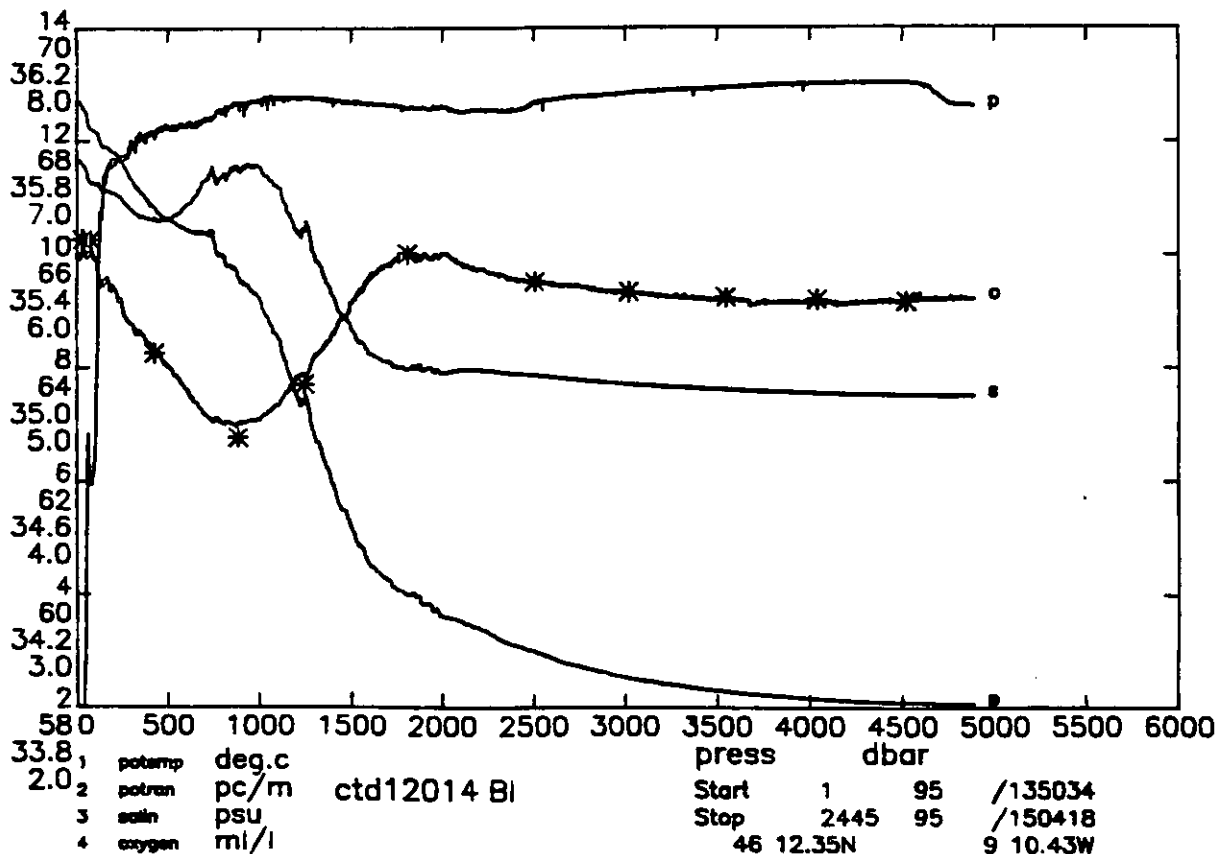
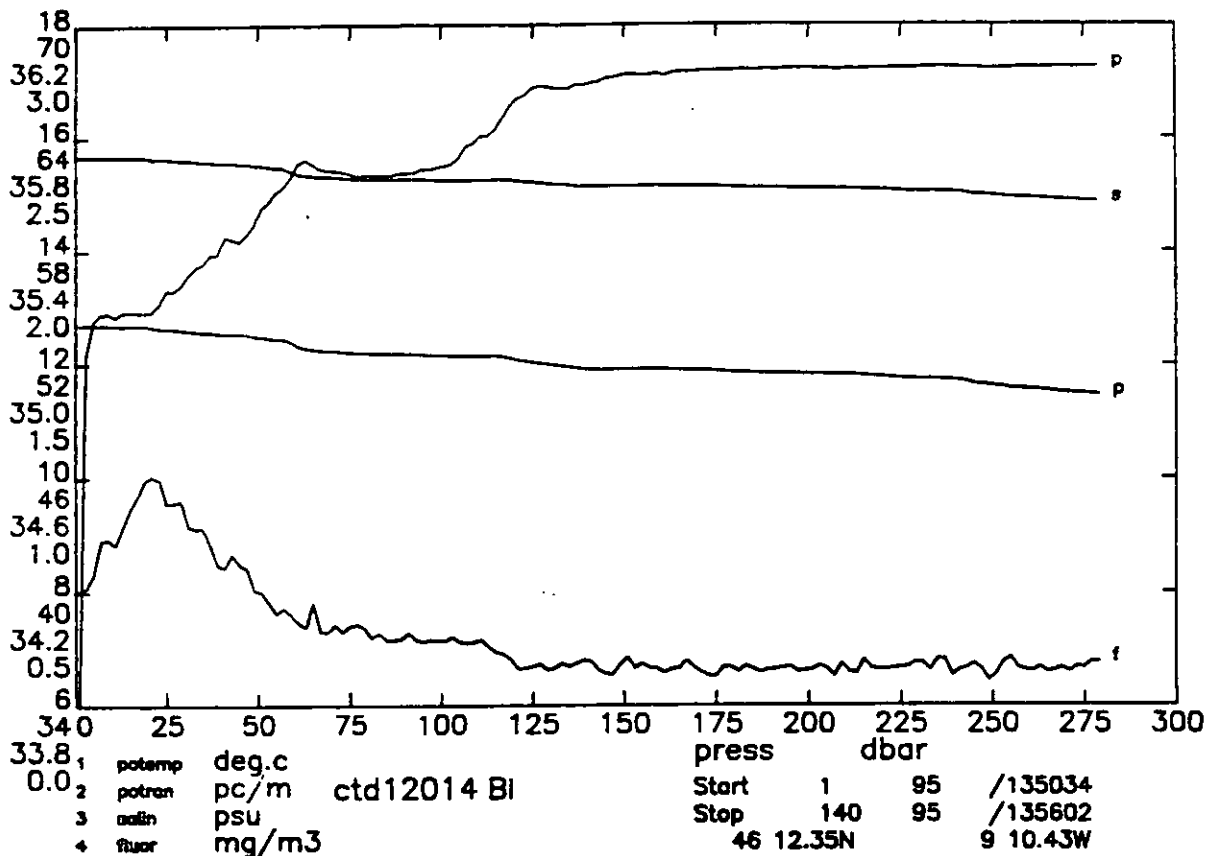


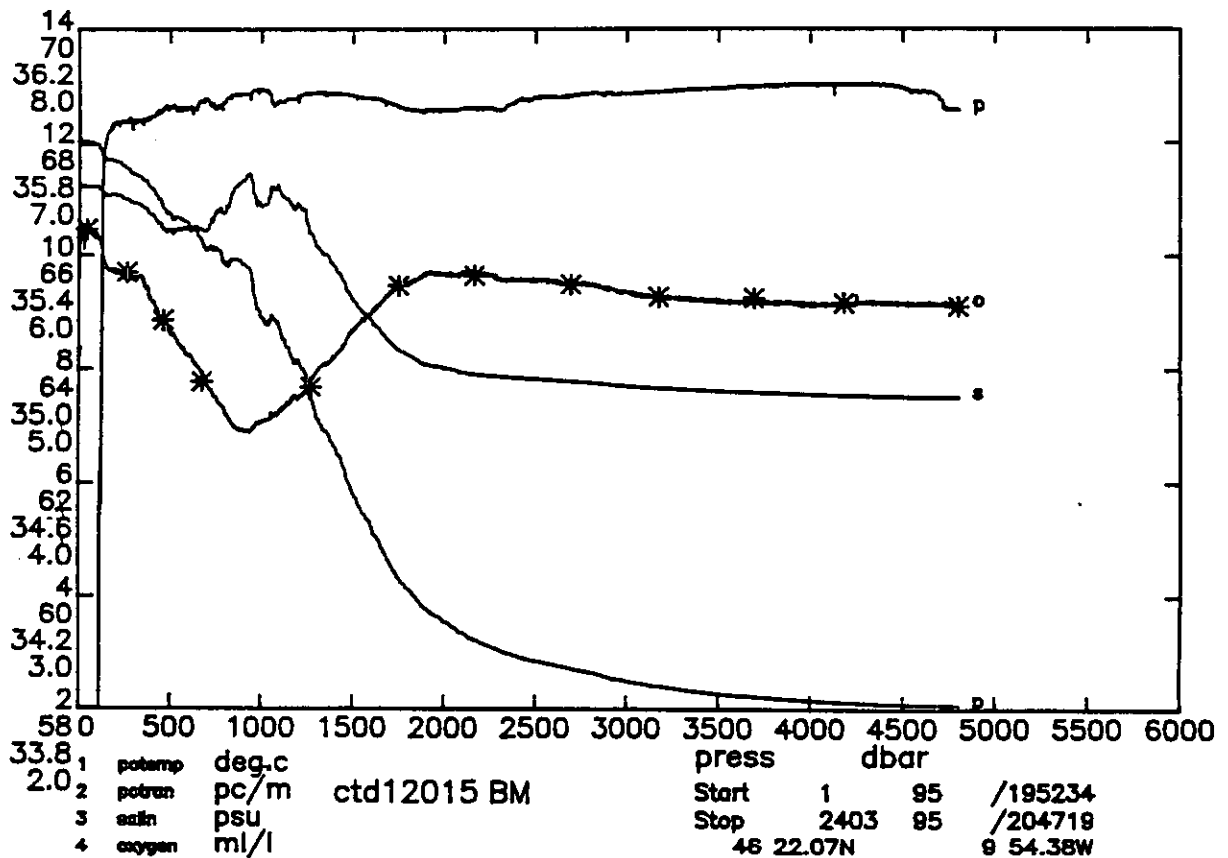
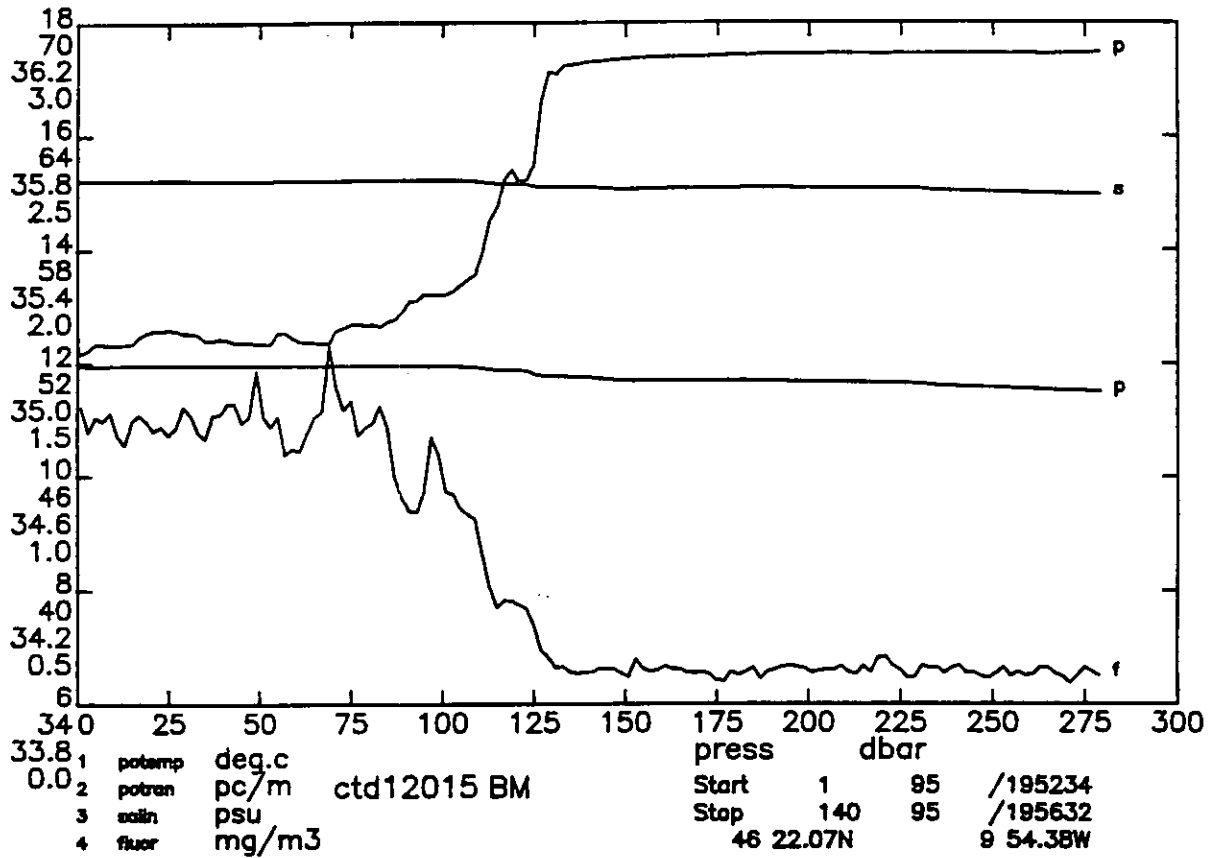


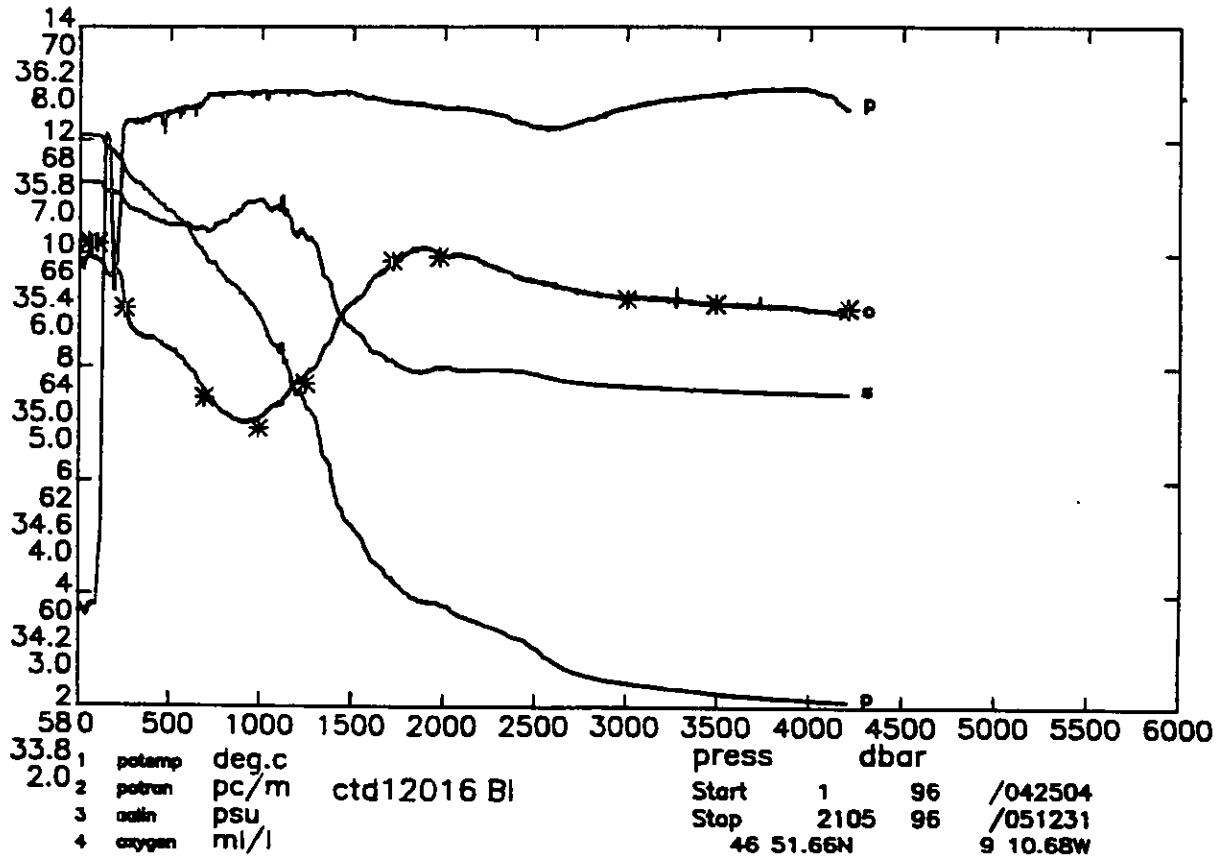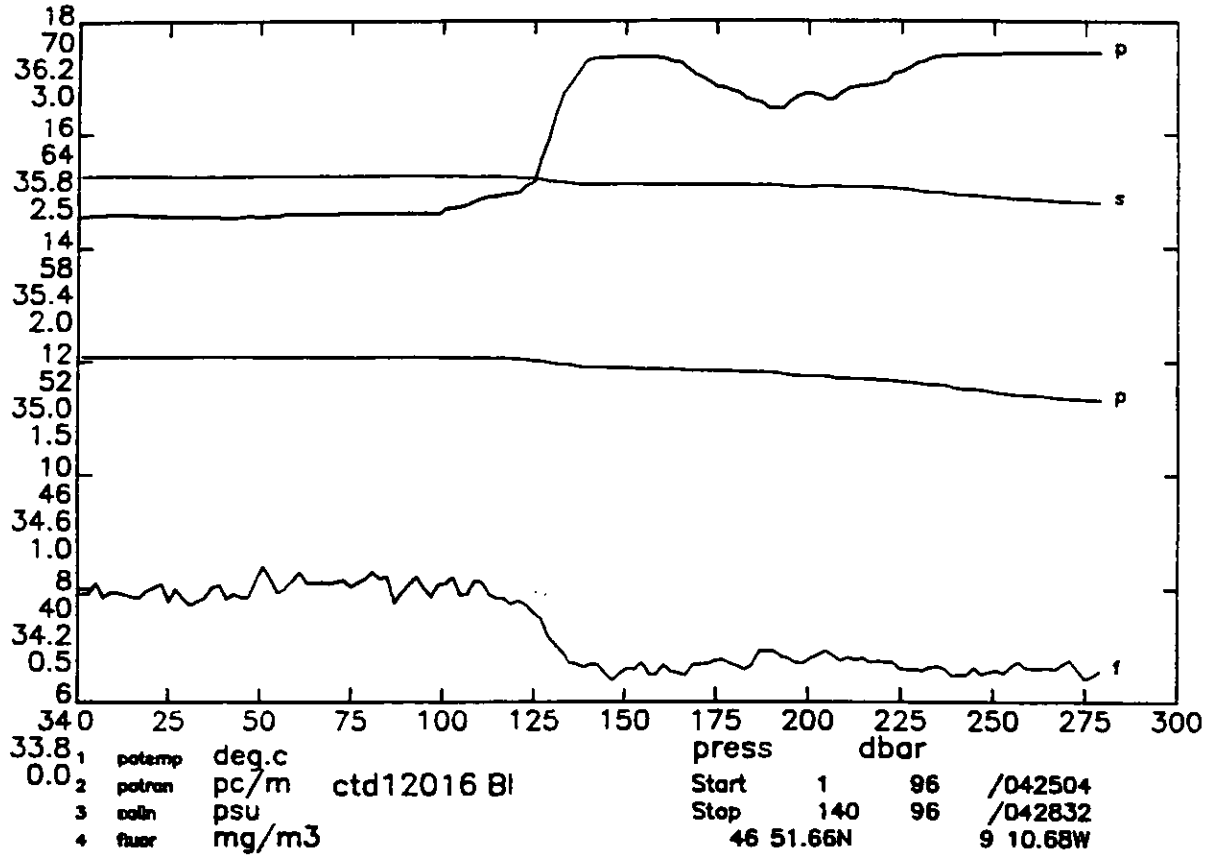

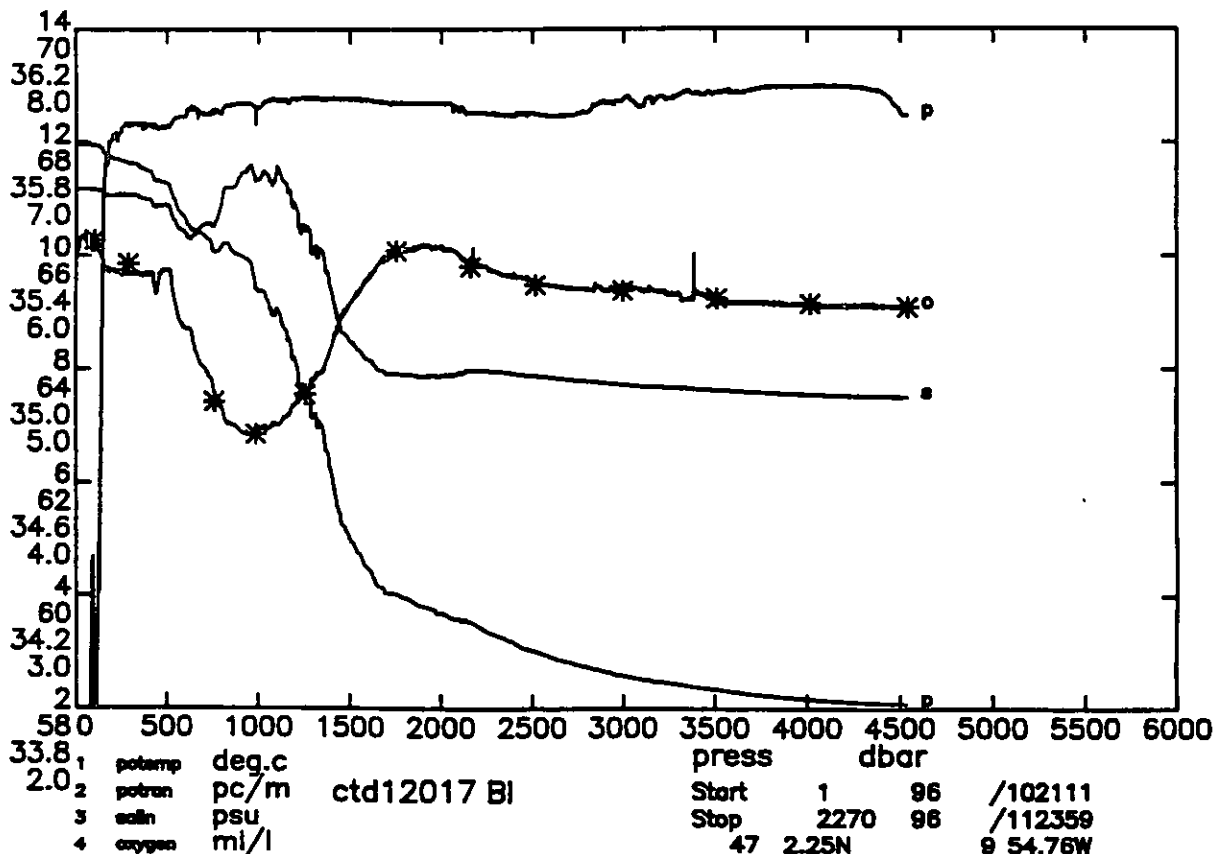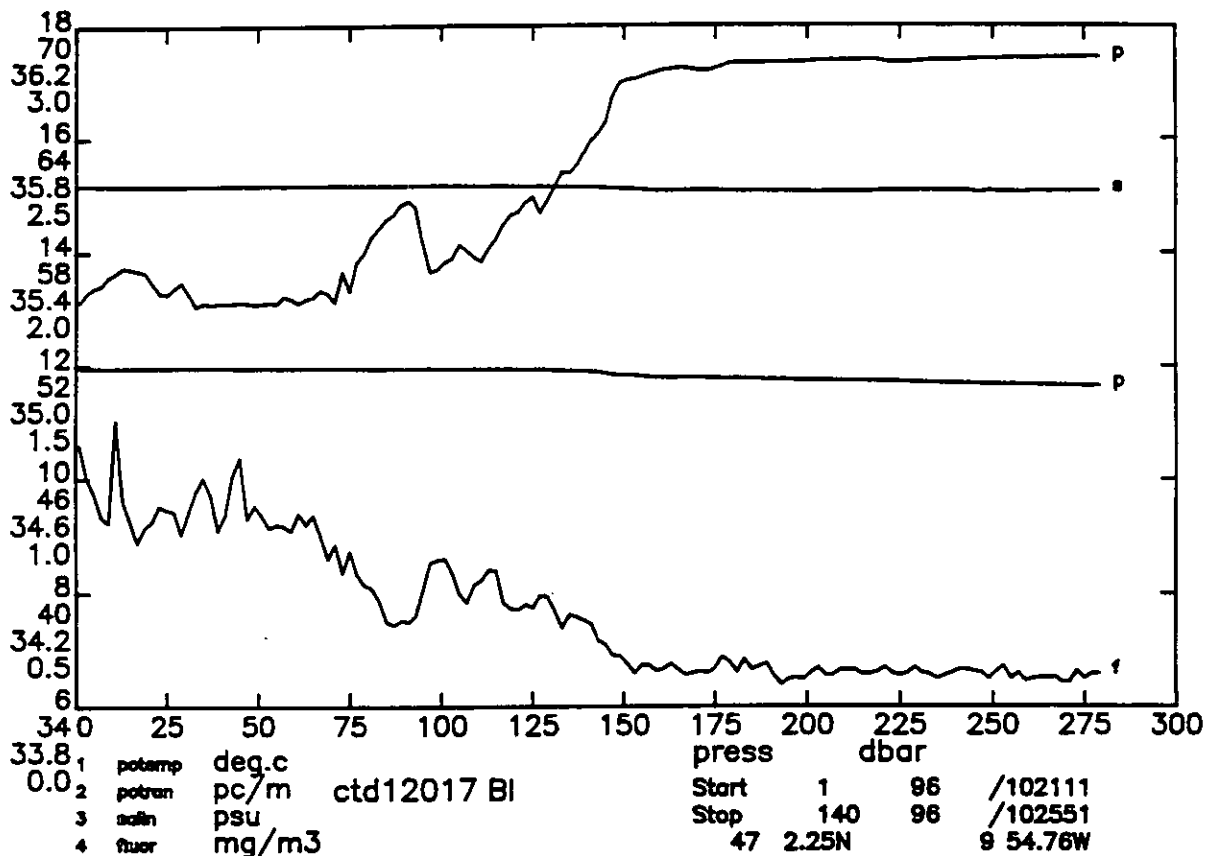

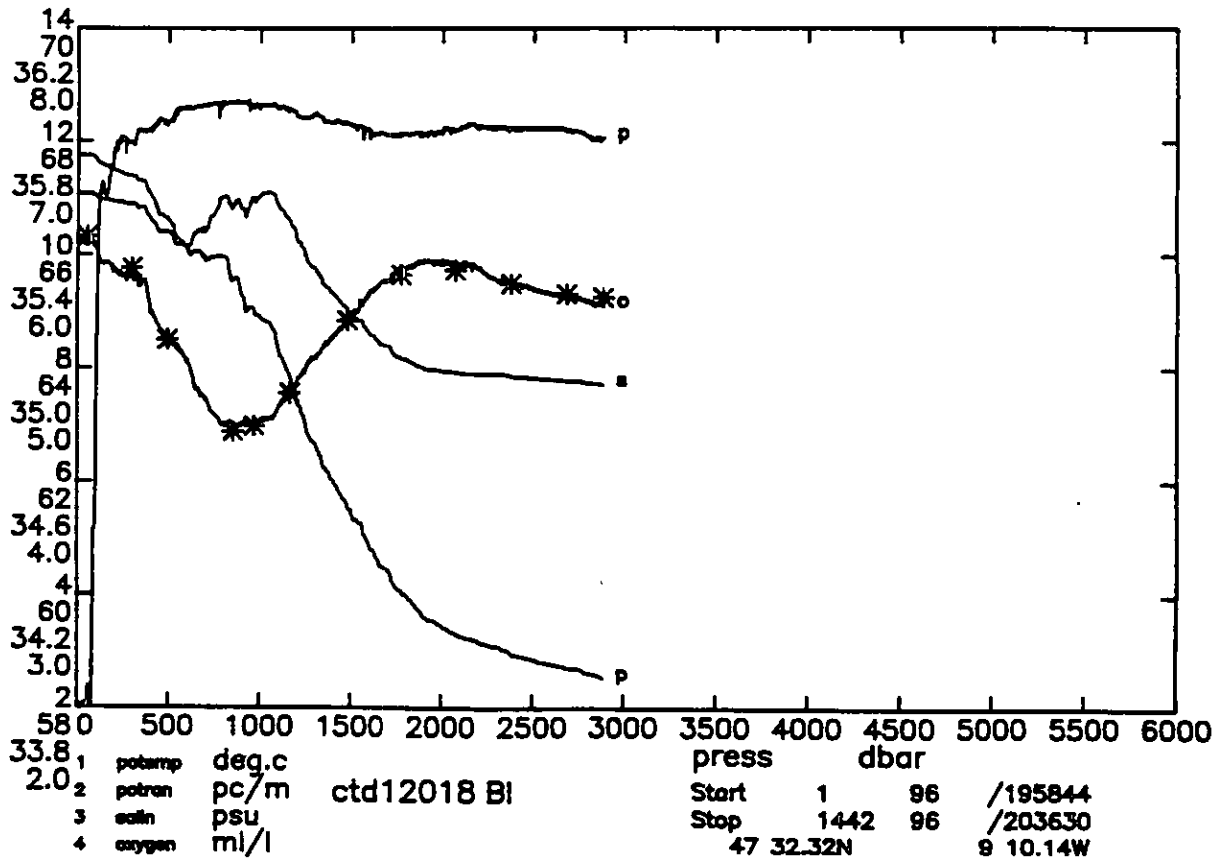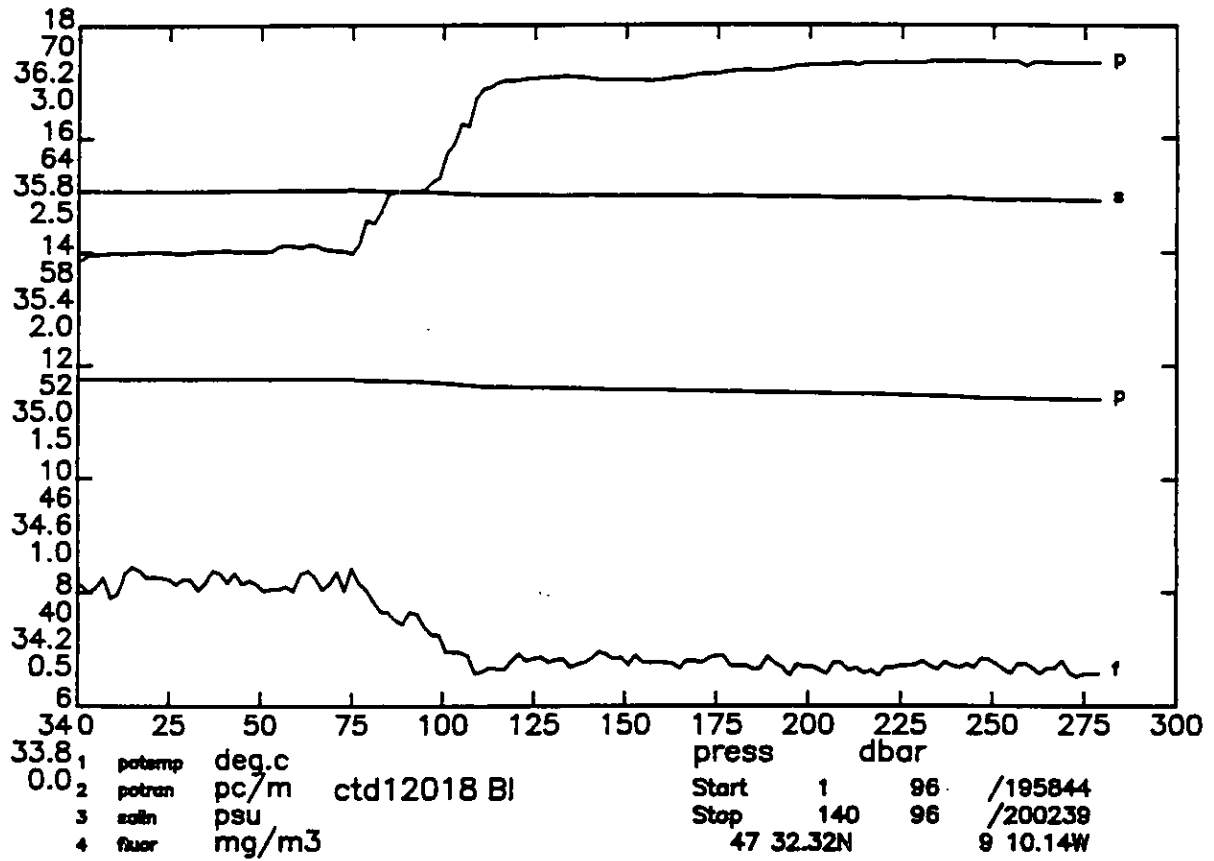

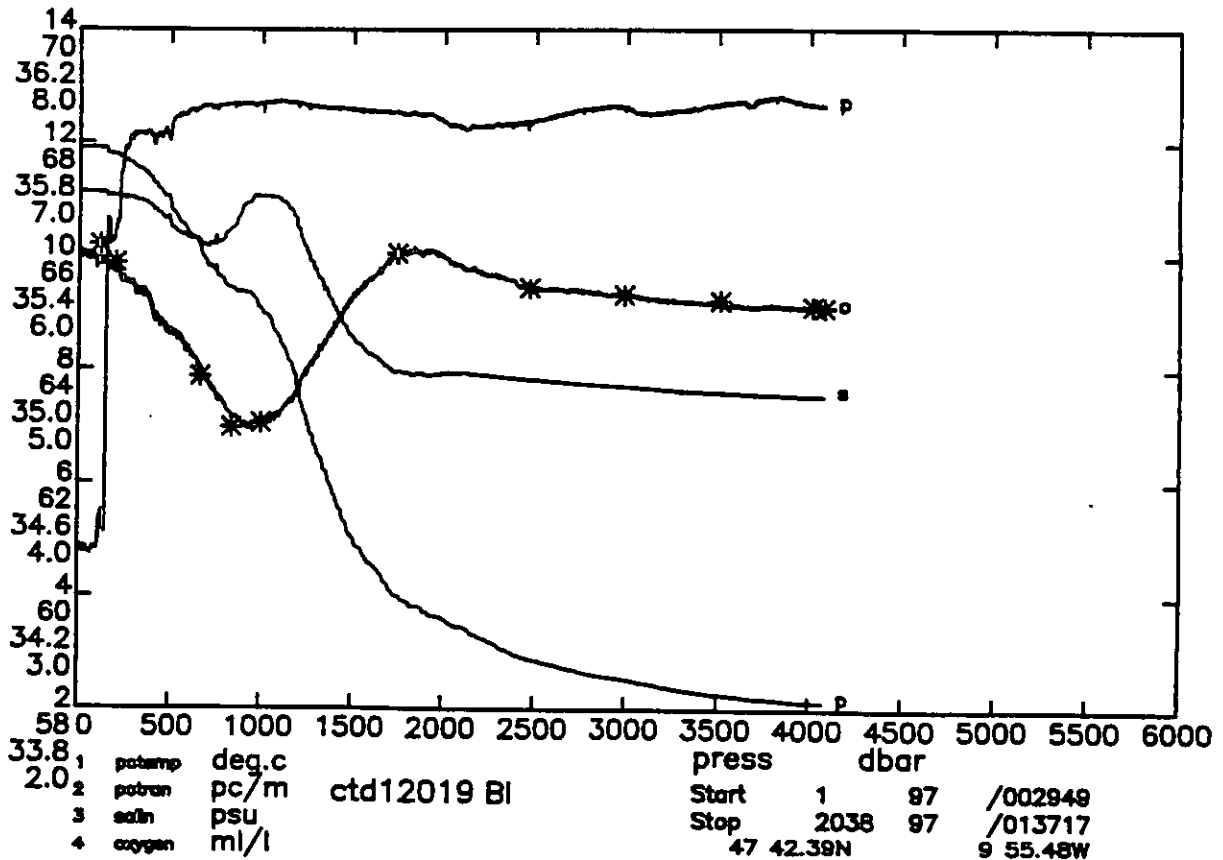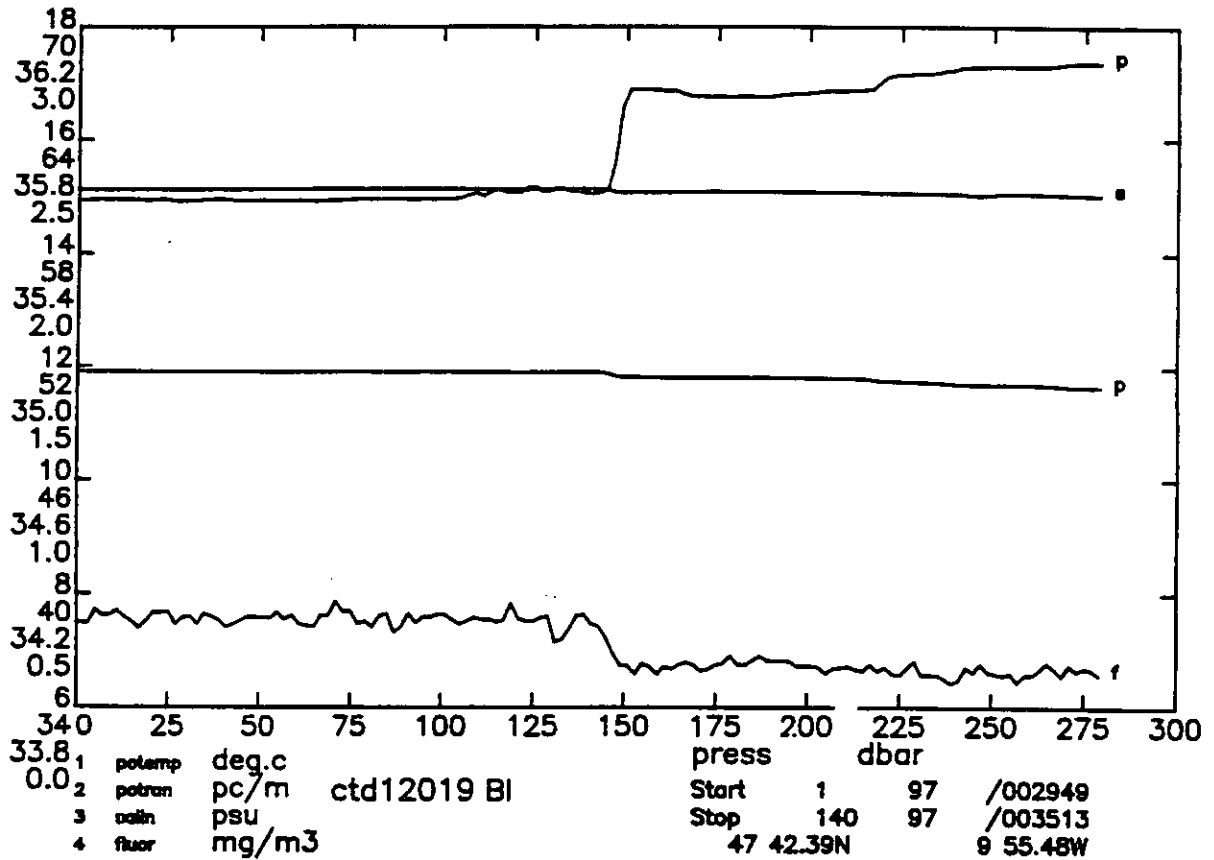

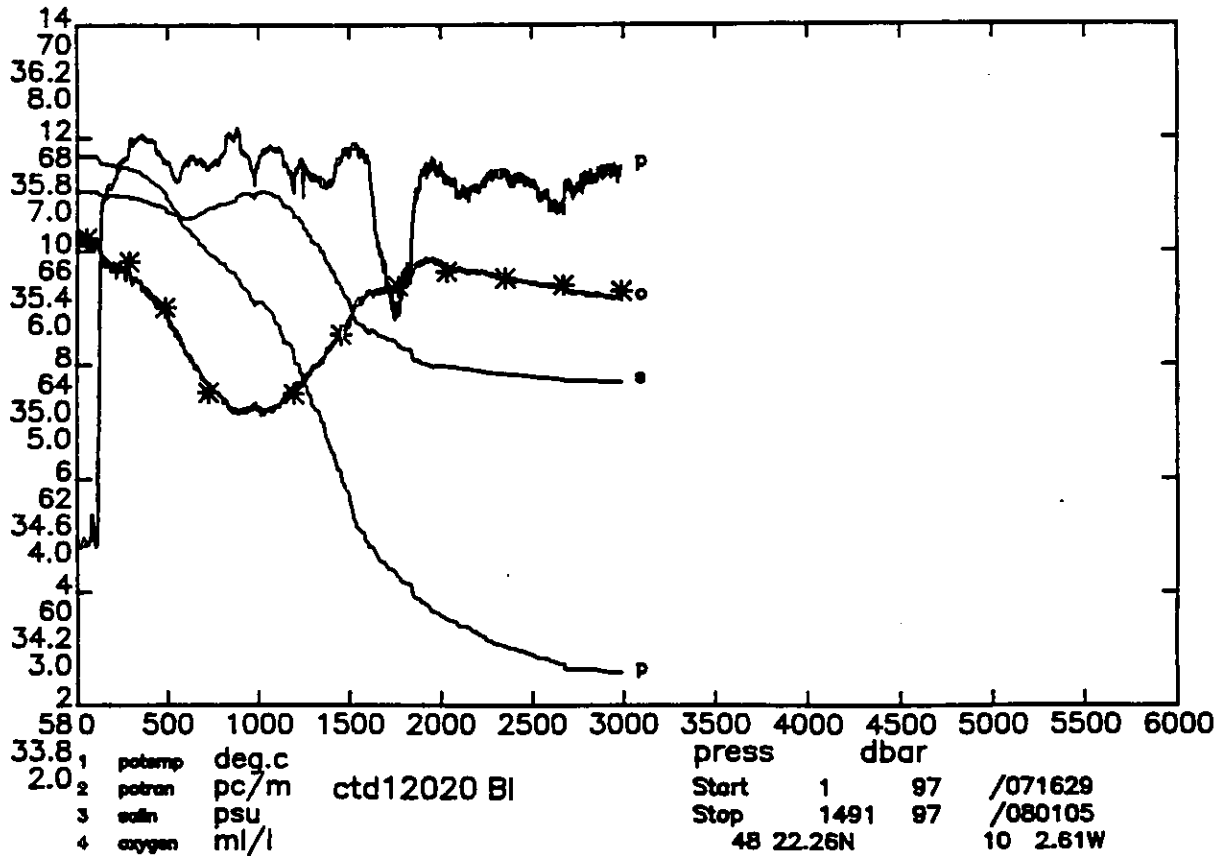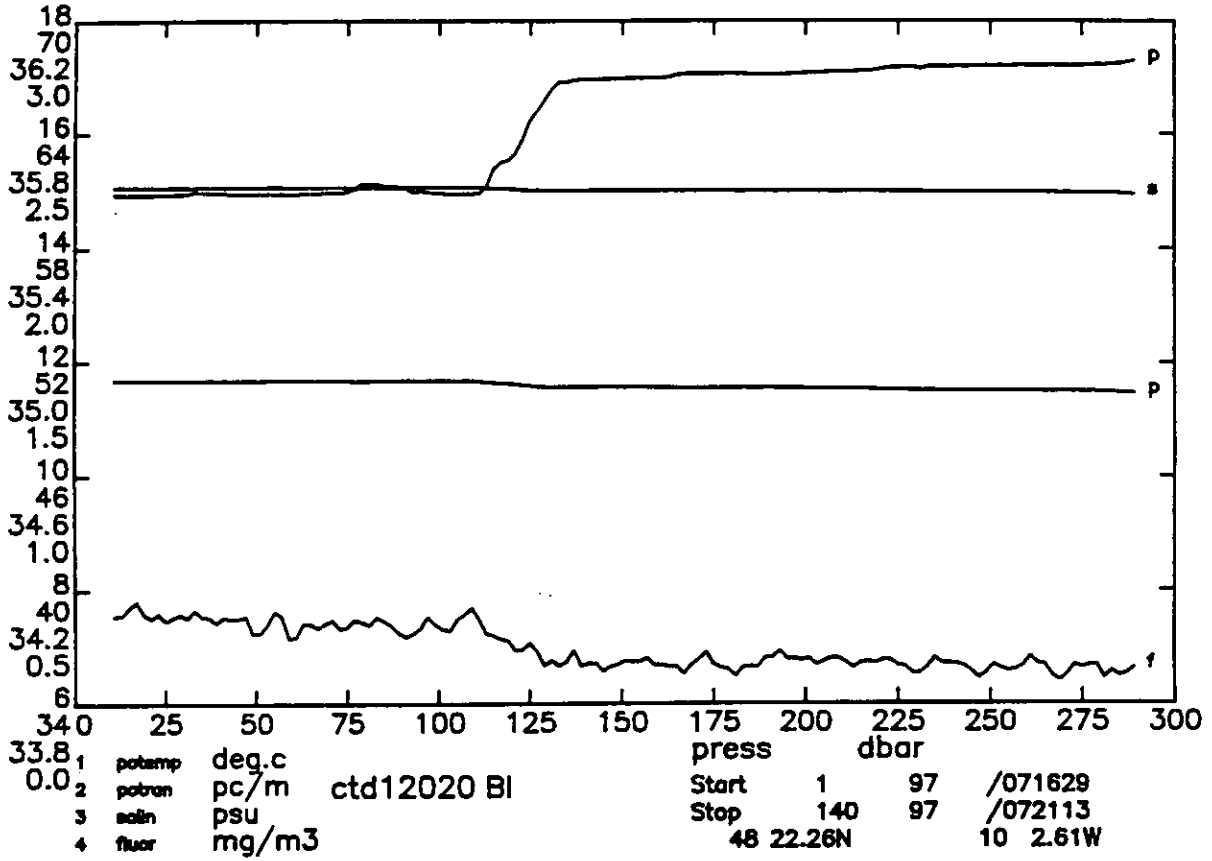


DISCOVERY CRUISE 189 STATION 12020

pres	temp	salin	oxygen	potemp	potran	fluor	sigma0	sigma2	sigma4	dynht	sndv	depth	svanom	bvfr
db	degc90		ml/l	degc90	‰/m	mg/m ³	kg/m ³	kg/m ³	kg/m ³	dyn.m	m/s	m	10 ⁻⁸ m ³ /kg	cy/hr
20.	11.692	35.613	6.09	11.689	60.81	0.39	27.125	35.857	44.208	0.019	1496.8	20.	93.49	-9.999
30.	11.693	35.613	6.14	11.689	60.87	0.39	27.125	35.857	44.208	0.028	1497.0	30.	93.79	-0.270
40.	11.696	35.613	6.14	11.691	60.91	0.37	27.125	35.857	44.208	0.037	1497.2	40.	94.05	0.179
50.	11.698	35.614	6.10	11.692	60.86	0.31	27.125	35.857	44.208	0.047	1497.4	50.	94.32	0.066
60.	11.700	35.613	6.01	11.692	60.84	0.29	27.124	35.856	44.207	0.056	1497.5	59.	94.68	-0.530
70.	11.701	35.613	6.07	11.692	60.94	0.36	27.124	35.857	44.208	0.066	1497.7	69.	94.91	0.400
80.	11.690	35.612	6.07	11.680	61.37	0.35	27.125	35.858	44.210	0.075	1497.8	79.	95.08	0.586
90.	11.699	35.613	6.00	11.688	61.17	0.30	27.125	35.858	44.209	0.085	1498.0	89.	95.40	-0.390
100.	11.703	35.614	6.09	11.690	60.87	0.34	27.125	35.858	44.209	0.094	1498.2	99.	95.62	0.402
120.	11.649	35.607	6.04	11.634	62.81	0.26	27.131	35.866	44.219	0.113	1498.3	119.	95.64	0.935
140.	11.585	35.600	5.92	11.567	66.90	0.17	27.138	35.876	44.231	0.133	1498.4	139.	95.50	1.068
160.	11.583	35.600	5.91	11.562	66.94	0.17	27.139	35.877	44.233	0.152	1498.8	159.	95.95	0.399
180.	11.569	35.599	5.85	11.546	67.18	0.14	27.141	35.879	44.235	0.171	1499.0	178.	96.33	0.519
200.	11.561	35.600	5.86	11.535	67.23	0.20	27.143	35.882	44.239	0.190	1499.3	198.	96.60	0.669
220.	11.544	35.597	5.82	11.515	67.42	0.19	27.145	35.885	44.243	0.210	1499.6	218.	96.94	0.571
240.	11.534	35.597	5.87	11.503	67.59	0.18	27.148	35.888	44.246	0.229	1499.9	238.	97.26	0.613
260.	11.531	35.595	5.85	11.498	67.63	0.19	27.147	35.888	44.246	0.249	1500.2	258.	97.85	-0.301
280.	11.526	35.596	5.82	11.490	67.70	0.14	27.149	35.890	44.248	0.268	1500.5	277.	98.19	0.576
300.	11.491	35.590	5.74	11.453	67.99	0.18	27.152	35.894	44.254	0.288	1500.7	297.	98.44	0.684
350.	11.452	35.585	5.73	11.407	68.03	0.13	27.156	35.901	44.262	0.337	1501.4	347.	99.33	0.548
400.	11.322	35.570	5.60	11.271	67.97	0.15	27.170	35.920	44.287	0.387	1501.8	396.	99.26	0.964
450.	11.223	35.564	5.56	11.166	67.77	0.14	27.185	35.939	44.310	0.436	1502.3	446.	99.07	1.003
500.	10.989	35.541	5.46	10.926	67.56	0.17	27.211	35.975	44.356	0.486	1502.2	495.	97.69	1.336
550.	10.777	35.532	5.30	10.709	67.25	0.12	27.243	36.016	44.405	0.534	1502.3	545.	95.72	1.473
600.	10.496	35.517	5.12	10.422	67.59	0.15	27.282	36.068	44.468	0.581	1502.1	594.	92.89	1.652
650.	10.357	35.520	4.98	10.278	67.62	0.18	27.310	36.102	44.508	0.627	1502.5	644.	91.30	1.372
700.	10.177	35.538	4.89	10.093	67.60	0.13	27.356	36.155	44.568	0.672	1502.7	693.	87.95	1.749
750.	10.014	35.555	4.79	9.923	67.56	0.17	27.399	36.204	44.624	0.715	1502.9	742.	84.89	1.689
800.	9.889	35.566	4.71	9.794	67.69	0.12	27.429	36.241	44.665	0.757	1503.3	792.	82.97	1.441
850.	9.746	35.574	4.62	9.645	68.05	0.17	27.461	36.278	44.709	0.798	1503.7	841.	80.90	1.472
900.	9.549	35.598	4.59	9.443	67.94	0.15	27.514	36.339	44.777	0.837	1503.8	890.	76.75	1.886
950.	9.360	35.604	4.61	9.249	67.63	0.09	27.550	36.384	44.830	0.875	1503.9	940.	74.05	1.603
1000.	9.222	35.607	4.61	9.106	67.53	0.13	27.577	36.417	44.868	0.911	1504.3	989.	72.42	1.358
1200.	8.176	35.524	4.83	8.044	67.28	0.15	27.679	36.567	45.063	1.050	1503.6	1186.	64.51	1.427
1400.	6.628	35.333	5.16	6.488	67.16	0.15	27.752	36.715	45.281	1.172	1500.8	1384.	56.67	1.389
1500.	5.817	35.221	5.36	5.676	67.67	0.13	27.769	36.772	45.376	1.227	1499.1	1482.	53.87	1.211
1600.	5.020	35.121	5.64	4.878	67.69	0.14	27.786	36.830	45.473	1.279	1497.4	1580.	50.67	1.242
1700.	4.623	35.097	5.66	4.476	65.53	0.15	27.812	36.877	45.539	1.328	1497.4	1679.	47.84	1.170
1800.	4.320	35.057	5.74	4.167	65.38	0.16	27.814	36.895	45.572	1.375	1497.8	1777.	47.44	0.720
1900.	3.974	35.007	5.90	3.817	67.36	0.10	27.811	36.911	45.606	1.423	1498.0	1875.	47.14	0.677
2000.	3.745	34.997	5.91	3.581	67.46	0.12	27.827	36.939	45.646	1.469	1498.7	1974.	45.55	0.935
2100.	3.563	34.988	5.86	3.393	67.04	0.14	27.838	36.960	45.676	1.514	1499.6	2072.	44.47	0.828
2200.	3.442	34.980	5.83	3.264	67.15	0.13	27.844	36.974	45.696	1.559	1500.8	2170.	44.10	0.657
2300.	3.272	34.970	5.79	3.086	67.41	0.12	27.853	36.992	45.723	1.602	1501.7	2268.	43.15	0.787
2400.	3.197	34.965	5.74	3.003	67.16	0.12	27.857	37.000	45.736	1.645	1503.1	2366.	43.15	0.535
2500.	3.103	34.959	5.73	2.901	67.17	0.14	27.862	37.011	45.752	1.688	1504.4	2464.	42.88	0.608
2600.	3.001	34.952	5.69	2.791	66.74	0.10	27.866	37.021	45.767	1.731	1505.6	2562.	42.59	0.608
2700.	2.861	34.944	5.64	2.644	67.11	0.11	27.873	37.035	45.789	1.773	1506.7	2660.	41.79	0.733
2800.	2.872	34.944	5.61	2.645	67.22	0.14	27.873	37.035	45.789	1.816	1508.4	2758.	42.54	0.037
2900.	2.844	34.943	5.60	2.607	67.45	0.12	27.875	37.040	45.796	1.858	1510.0	2856.	42.83	0.397


Sample data

2991.	2.827	34.943	5.65	2.580
2674.	2.949	34.946	5.70	2.732
2355.	3.237	34.965	5.76	3.046
2034.	3.682	34.994	5.82	3.515
1768.	4.410	35.069	5.69	4.258
1454.	6.199	35.265	5.27	6.058
1195.	8.274	35.524	4.75	8.142
984.	9.207	35.601	-9.99	9.093
726.	10.061	35.543	4.76	9.974
488.	11.100	35.542	5.51	11.038
287.	11.497	35.591	5.91	11.460
53.	11.699	35.611	6.12	11.692


ctdd42n AH ctdd42n Cruise 189

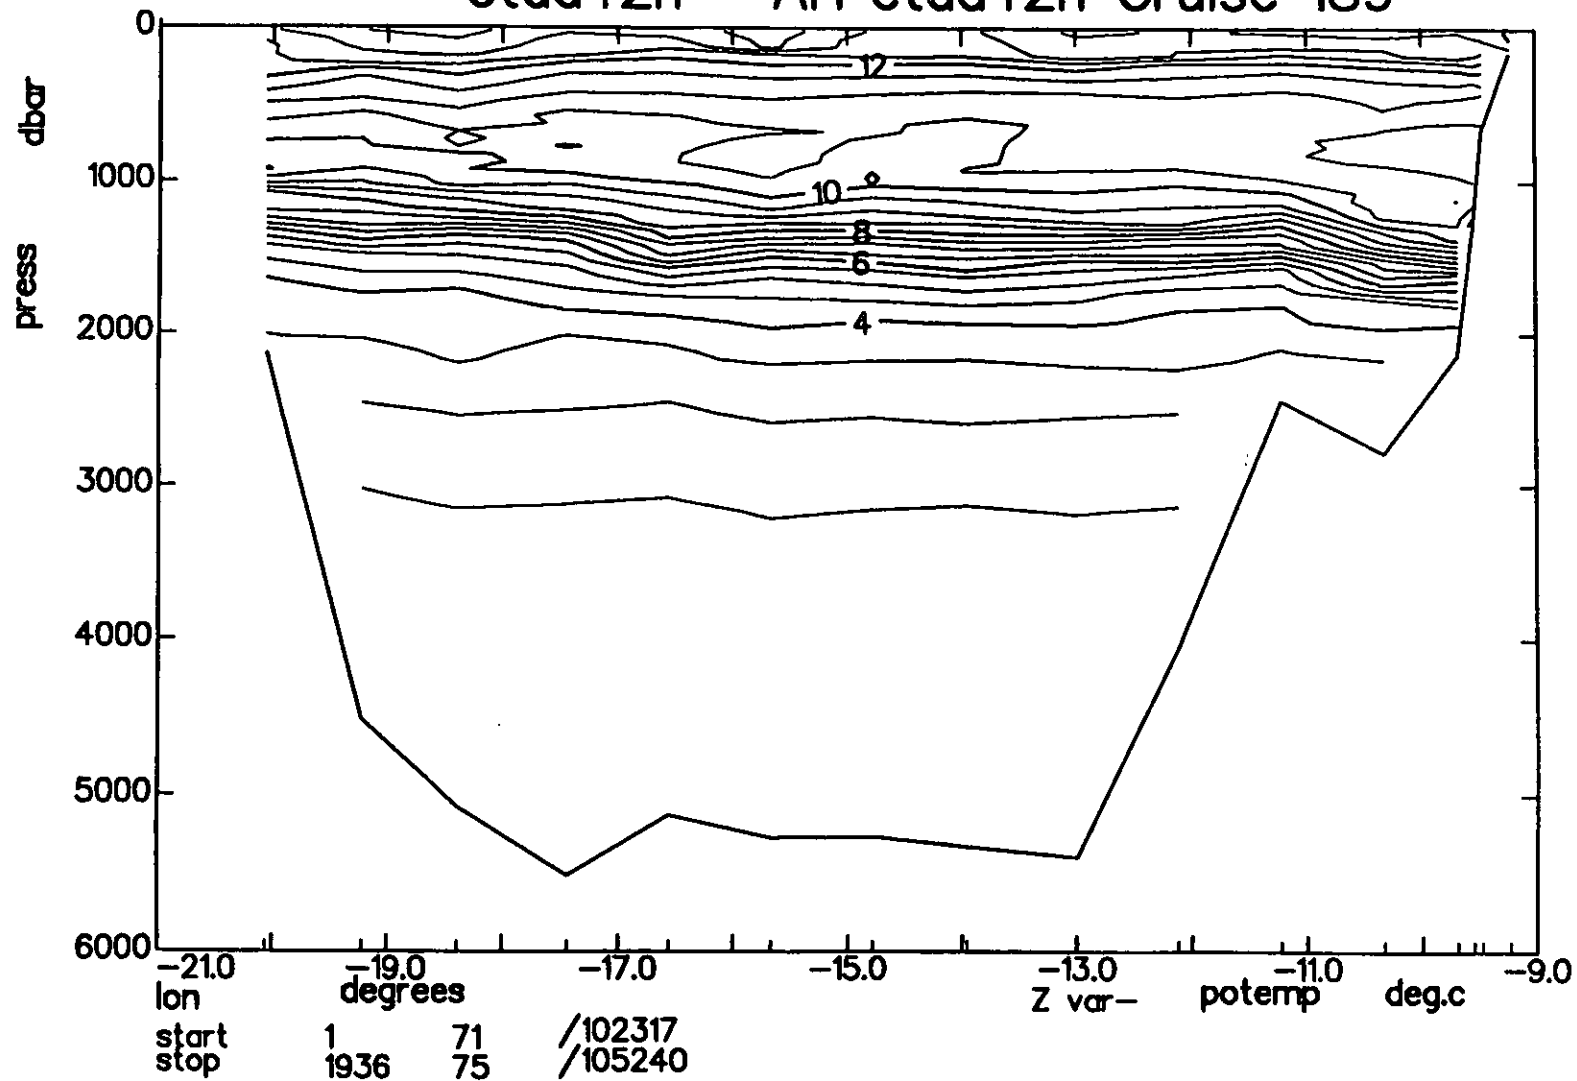


ctdd42n AH ctdd42n Cruise 189

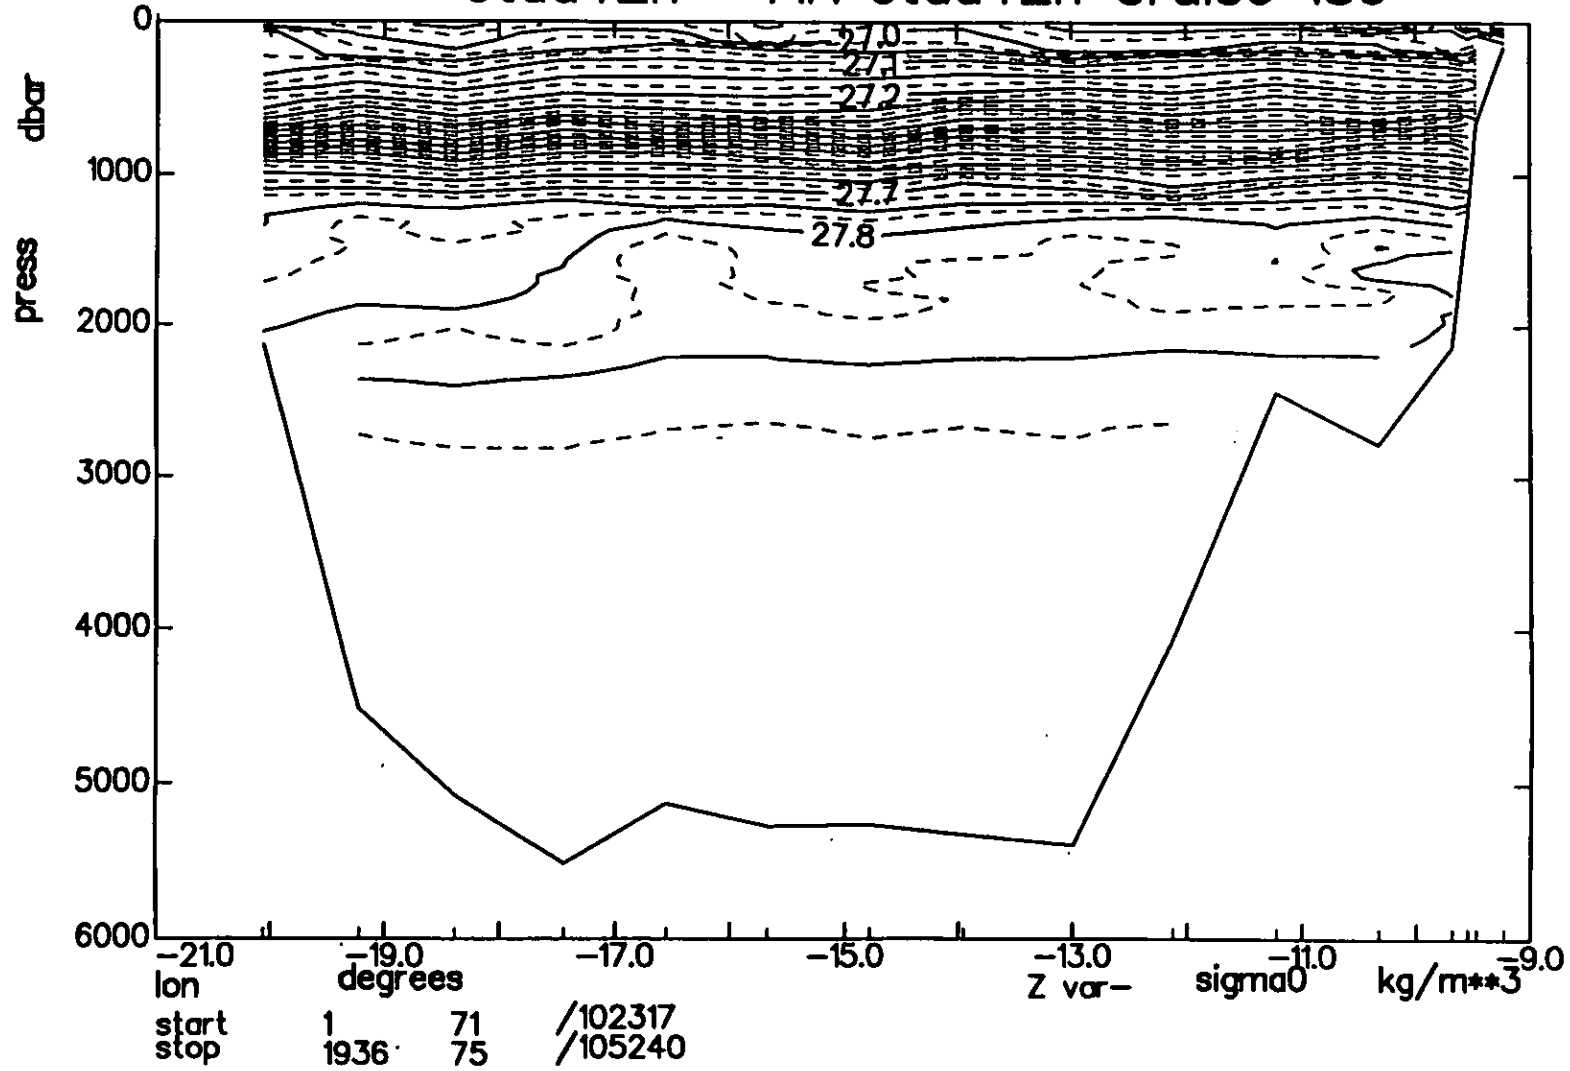


ctdd42n AH ctdd42n Cruise 189

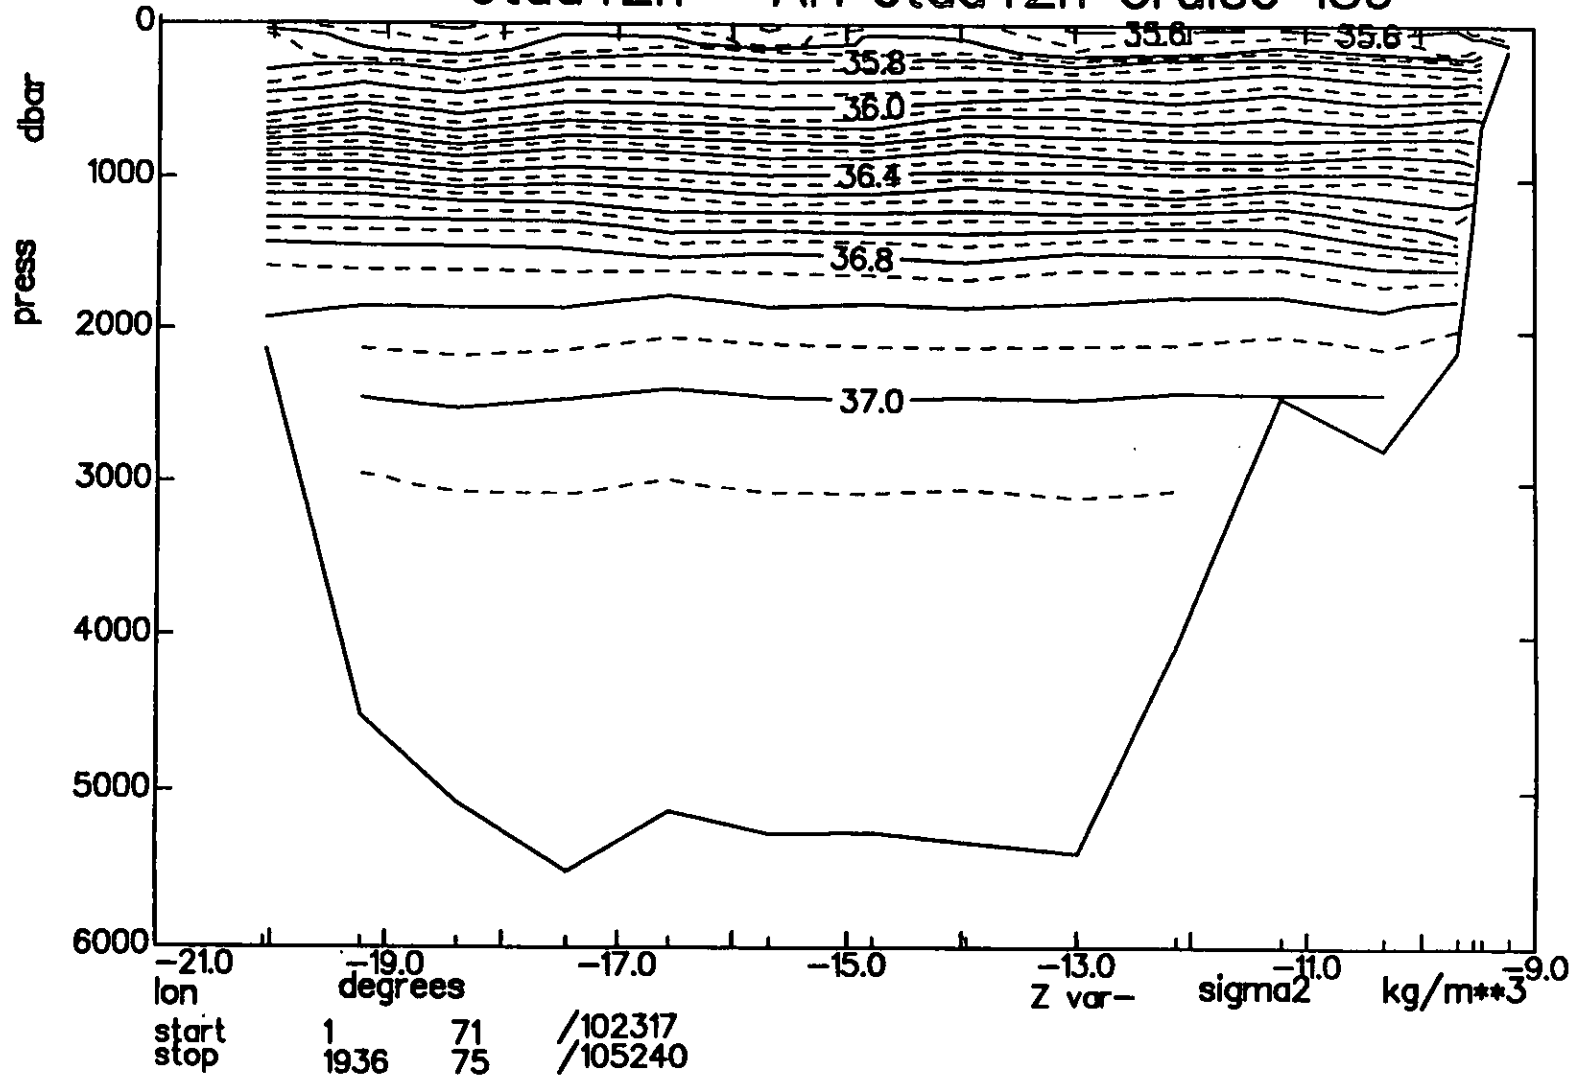


ctdd42n AH ctdd42n Cruise 189

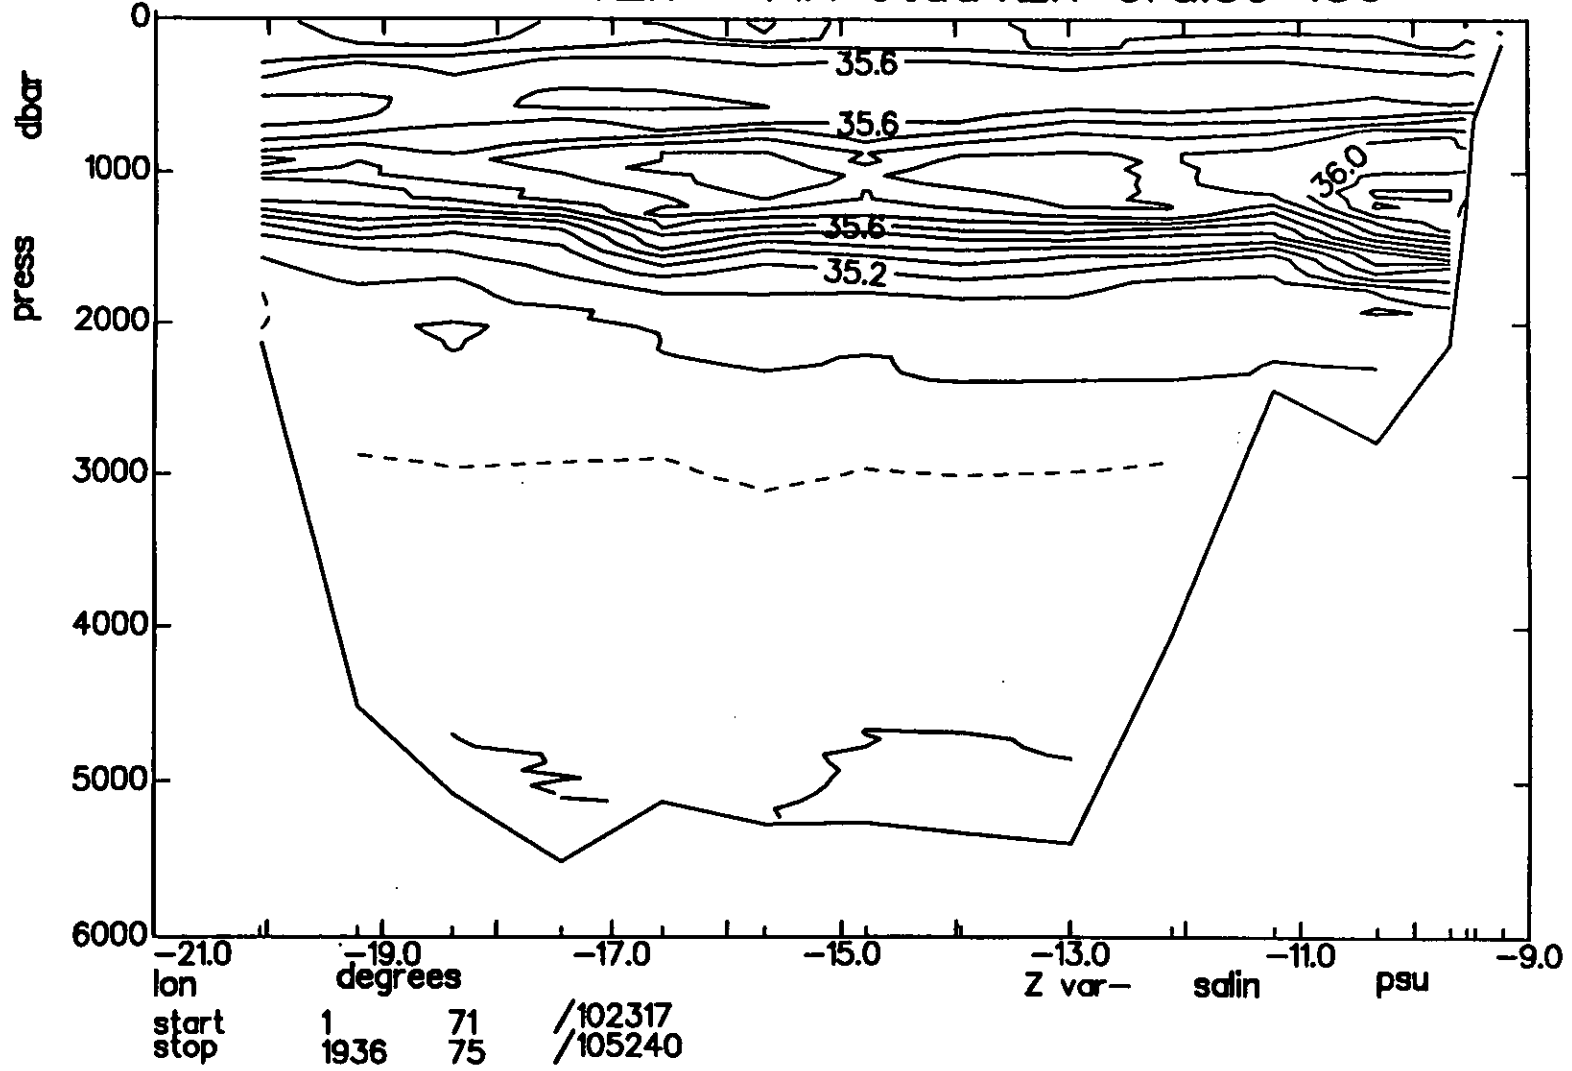


ctdd42n AH ctdd42n Cruise 189

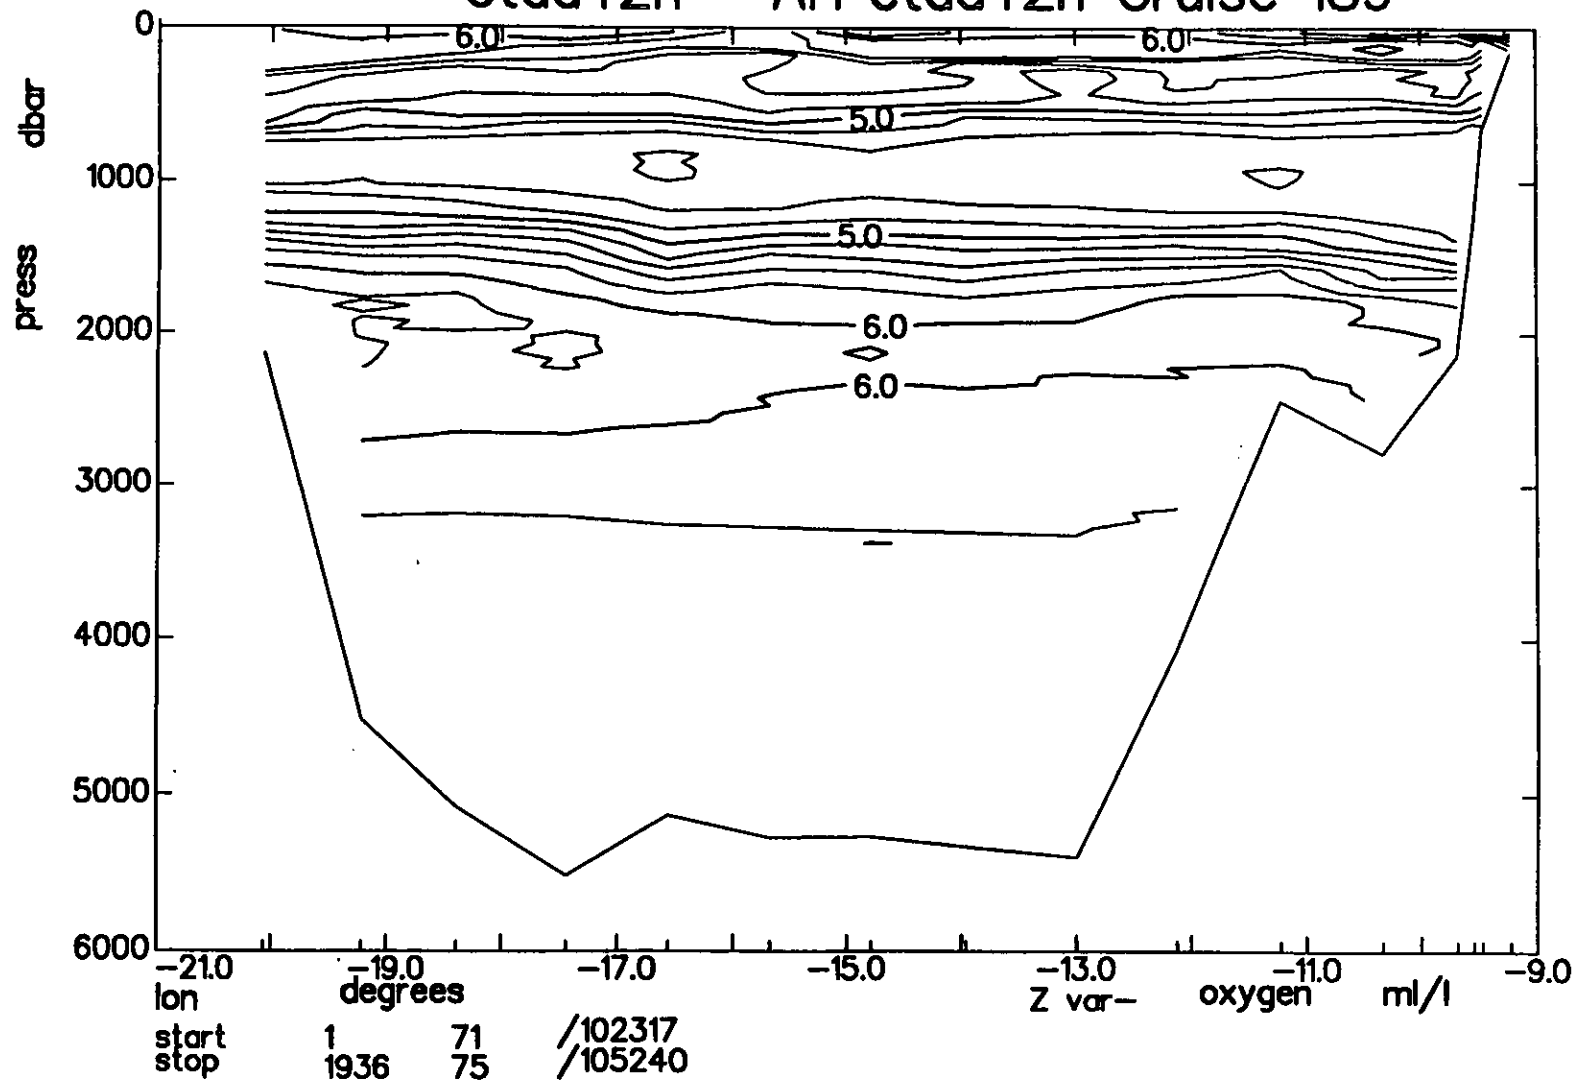


ctdd42n AH ctdd42n Cruise 189

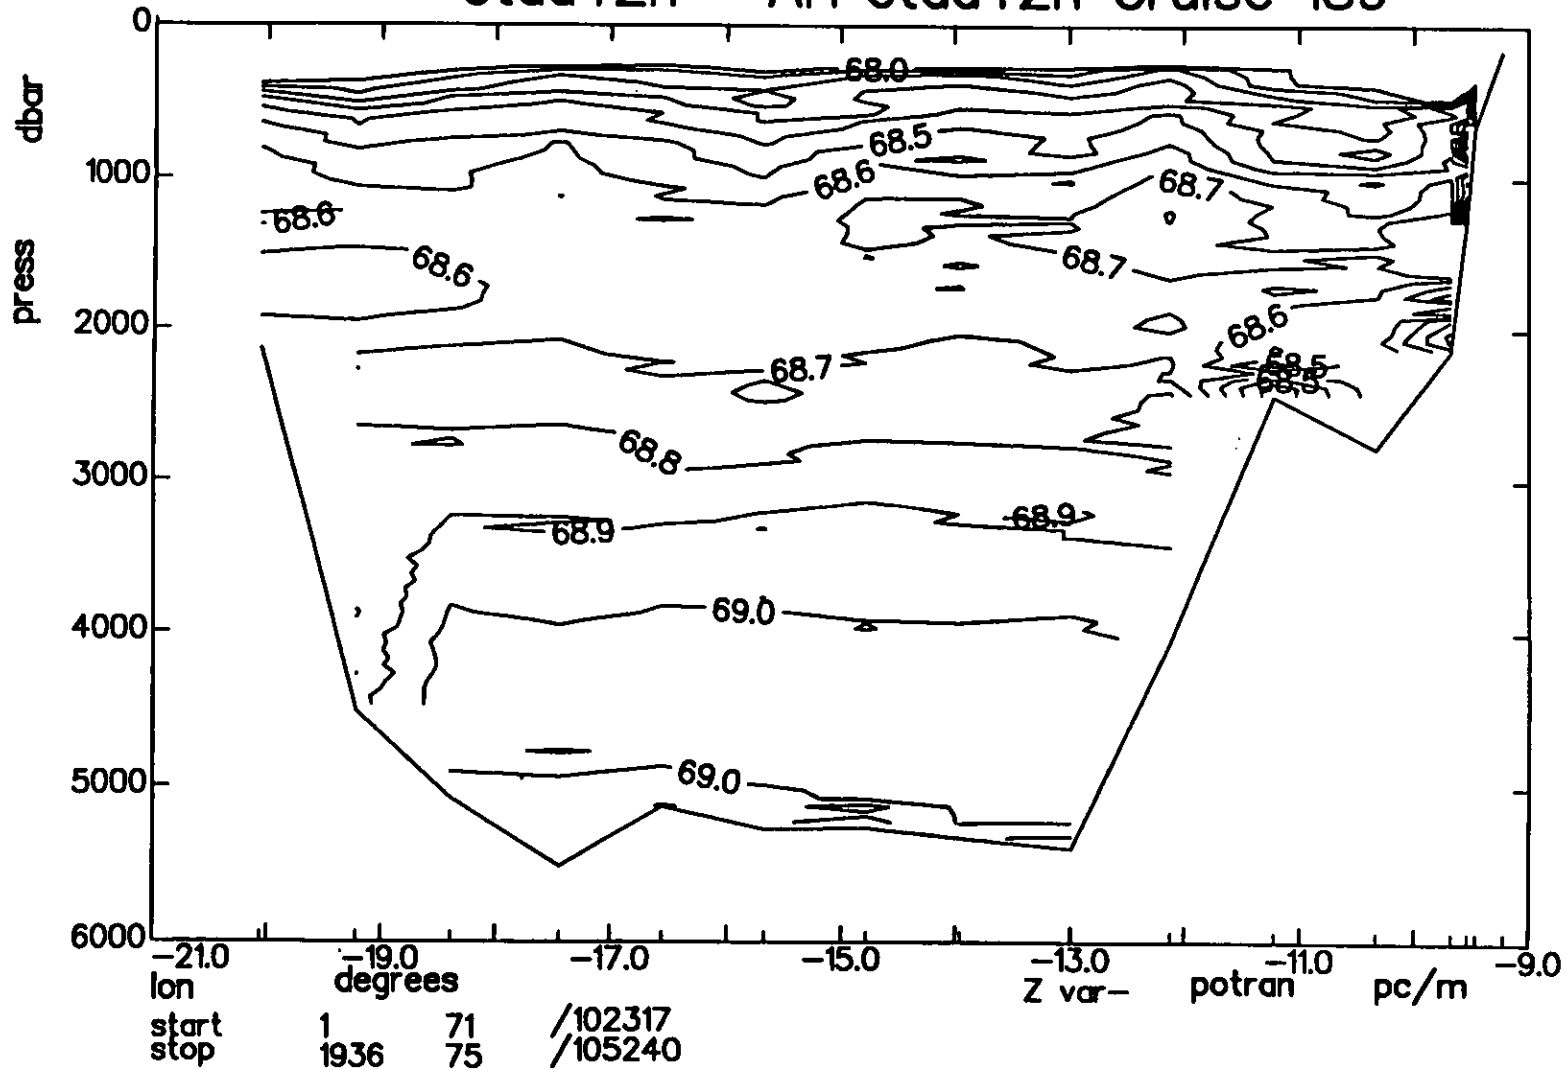


ctdd20w AV ctd20w Cruise 189

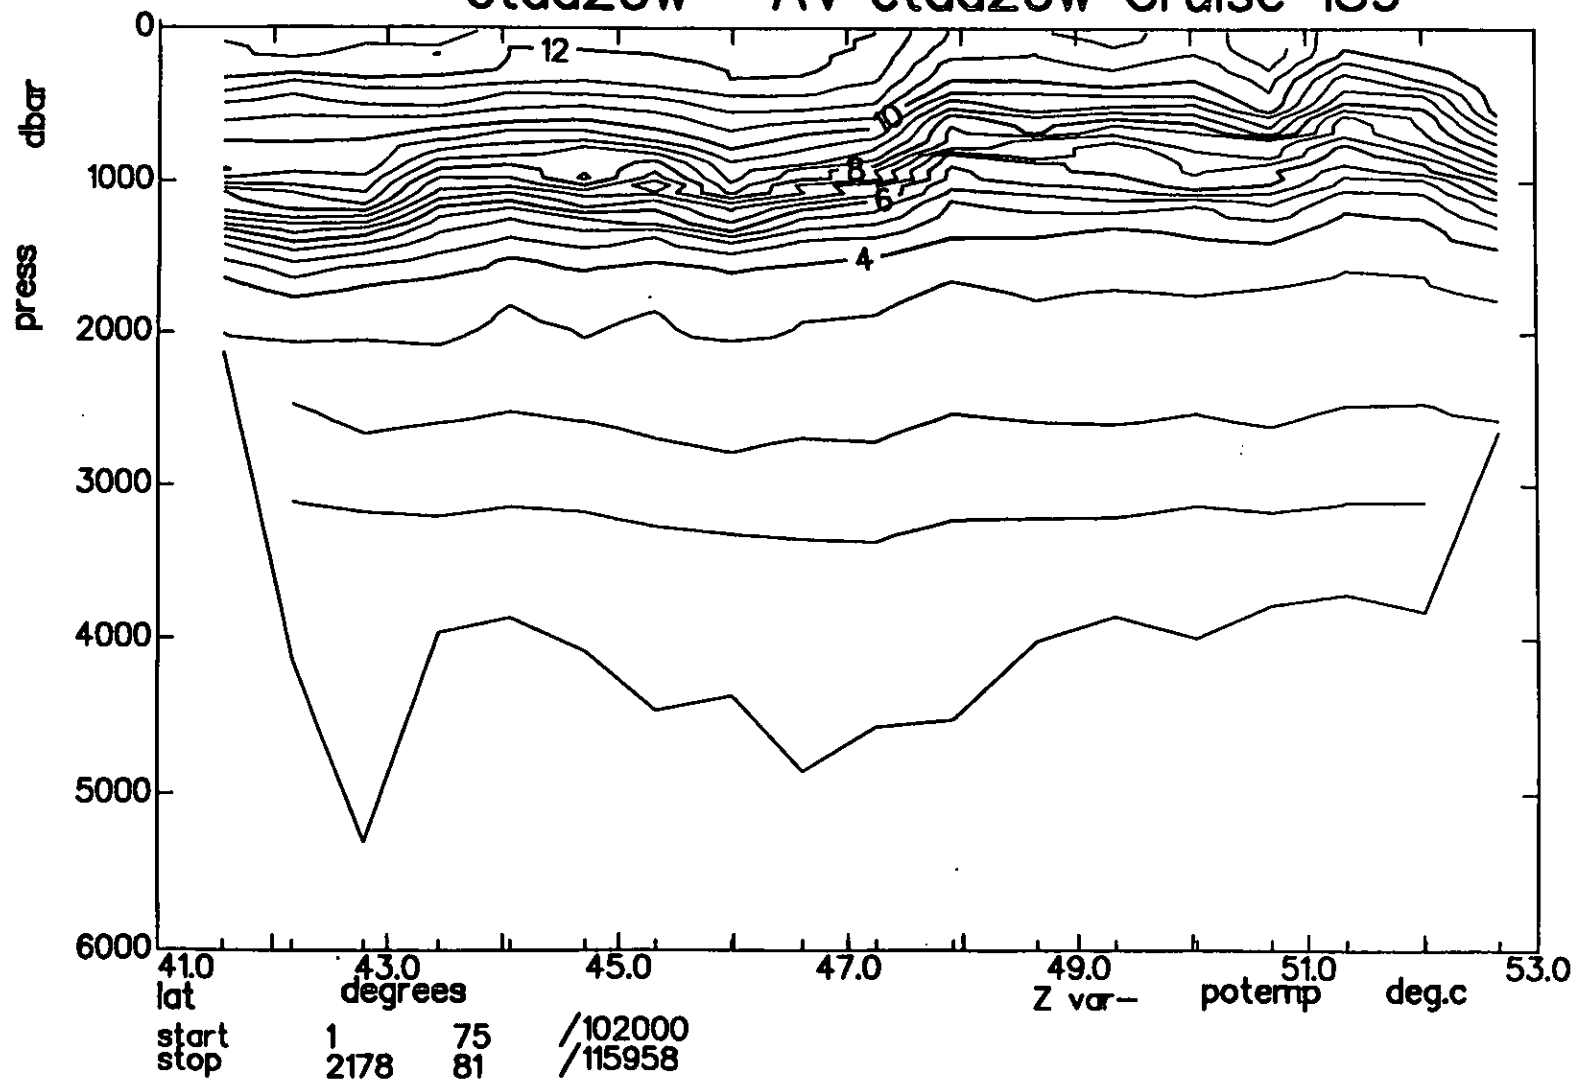


ctdd20w AV ctd20w Cruise 189

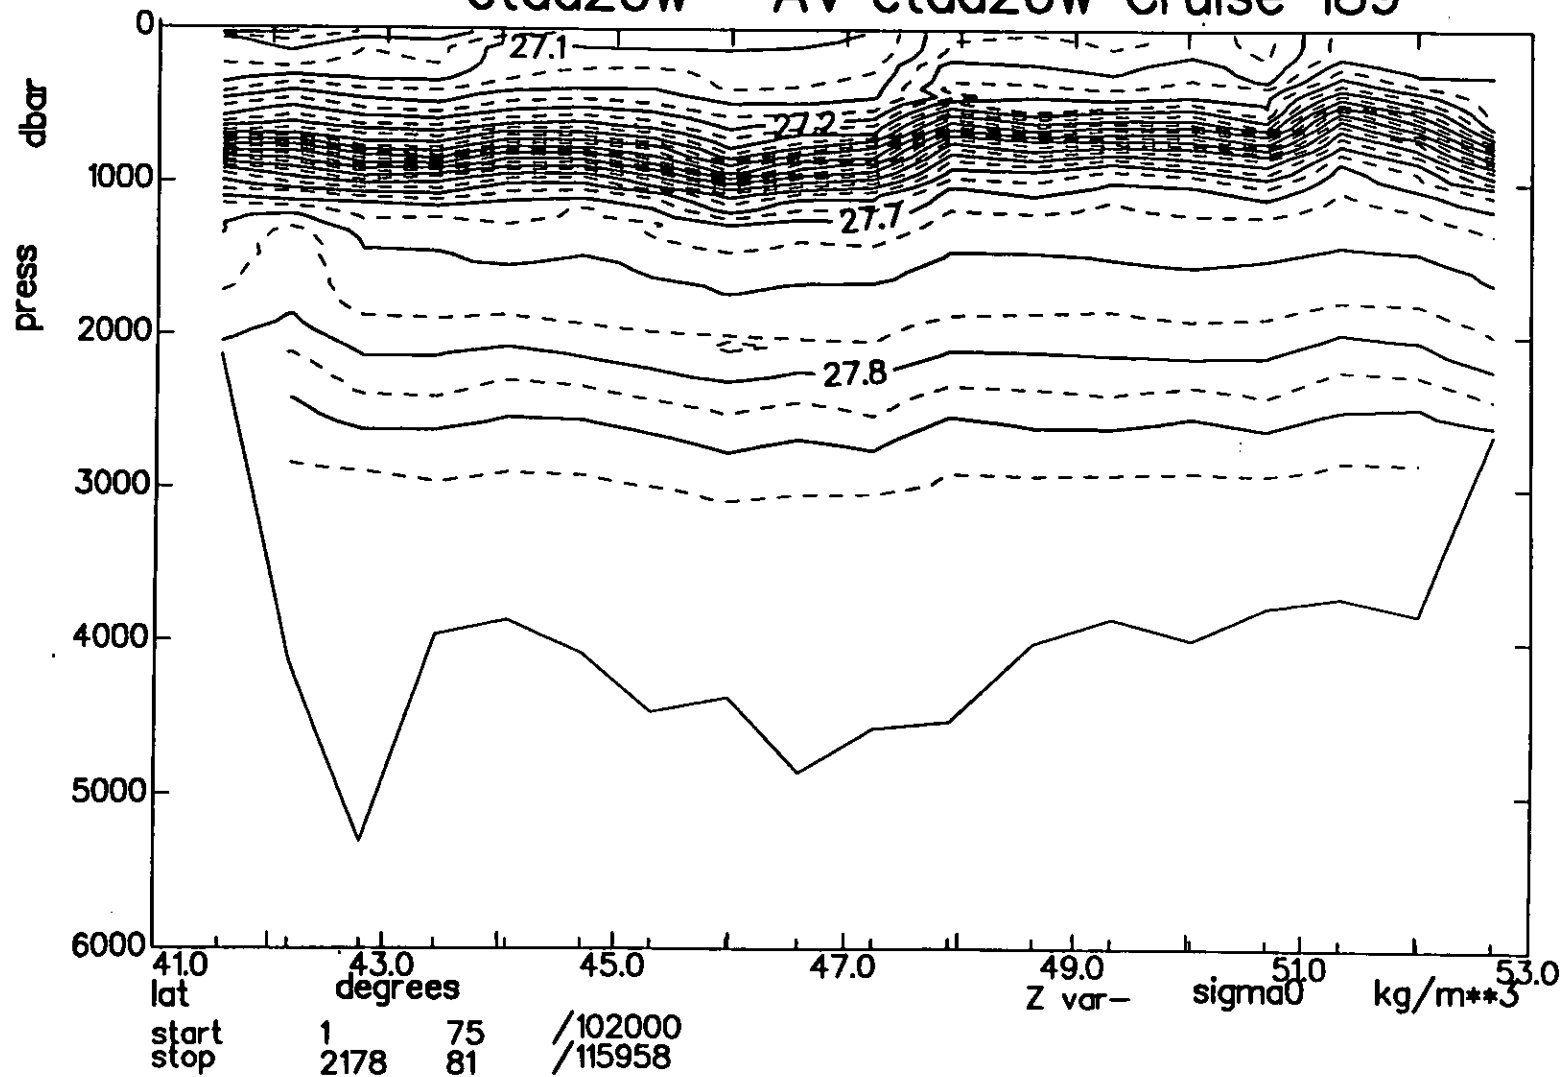


ctdd20w AV ctd20w Cruise 189

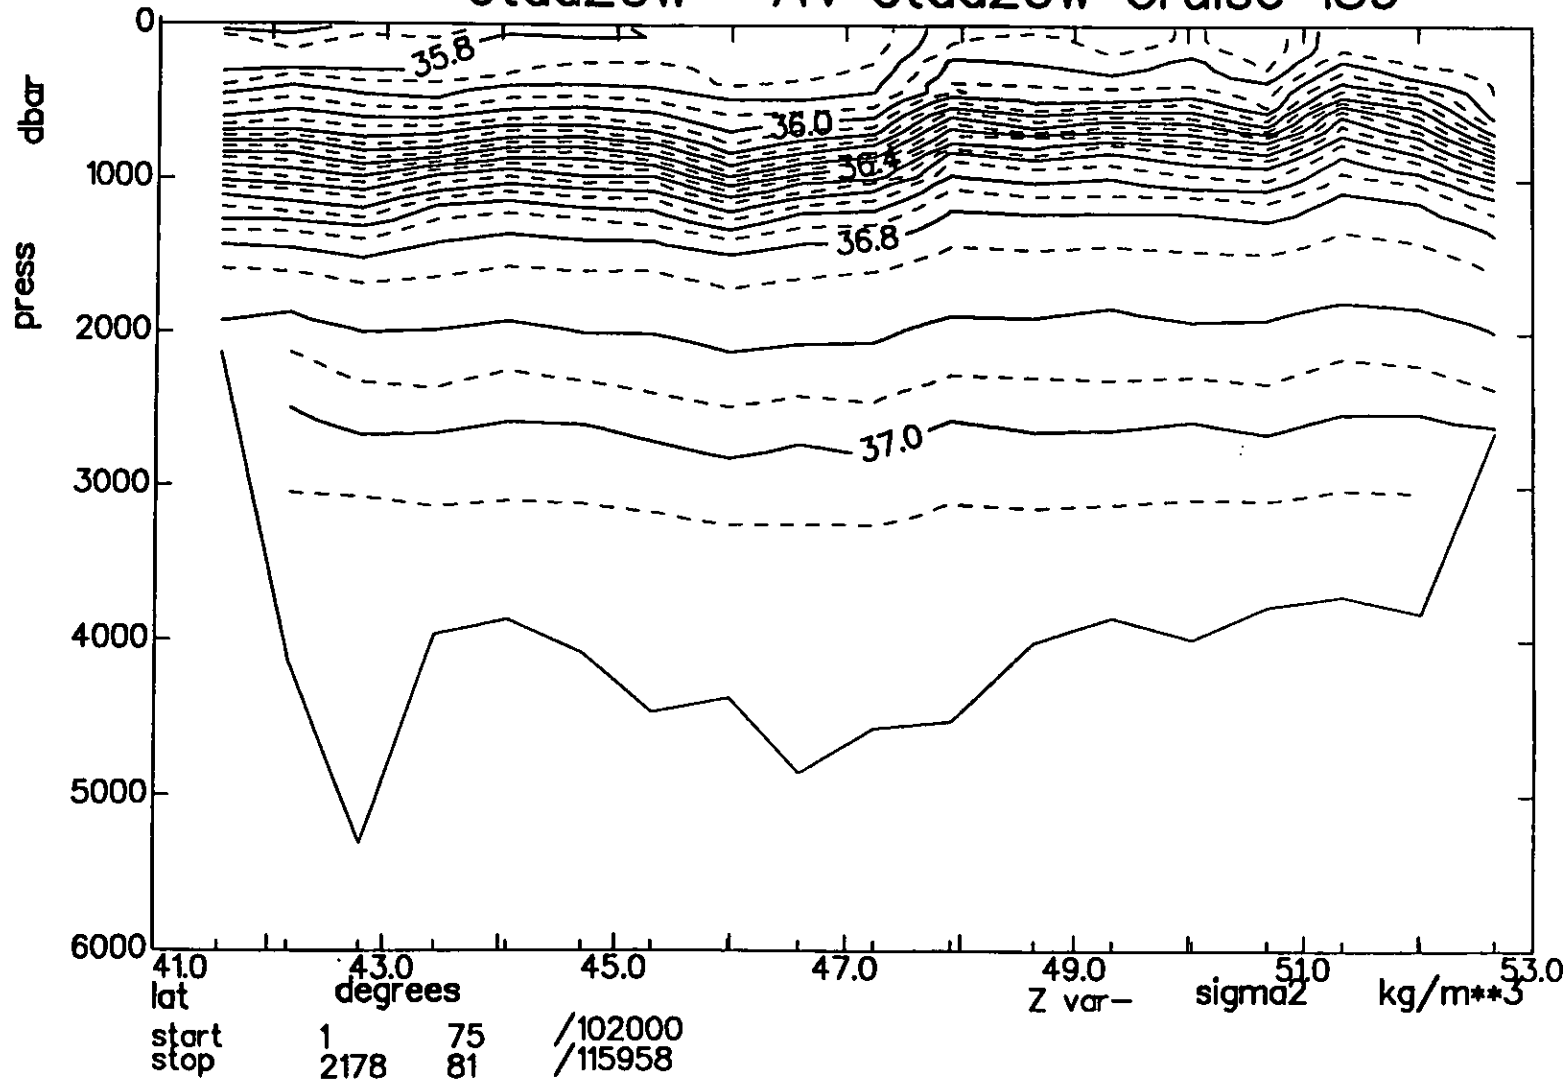


ctdd20w AV ctd20w Cruise 189

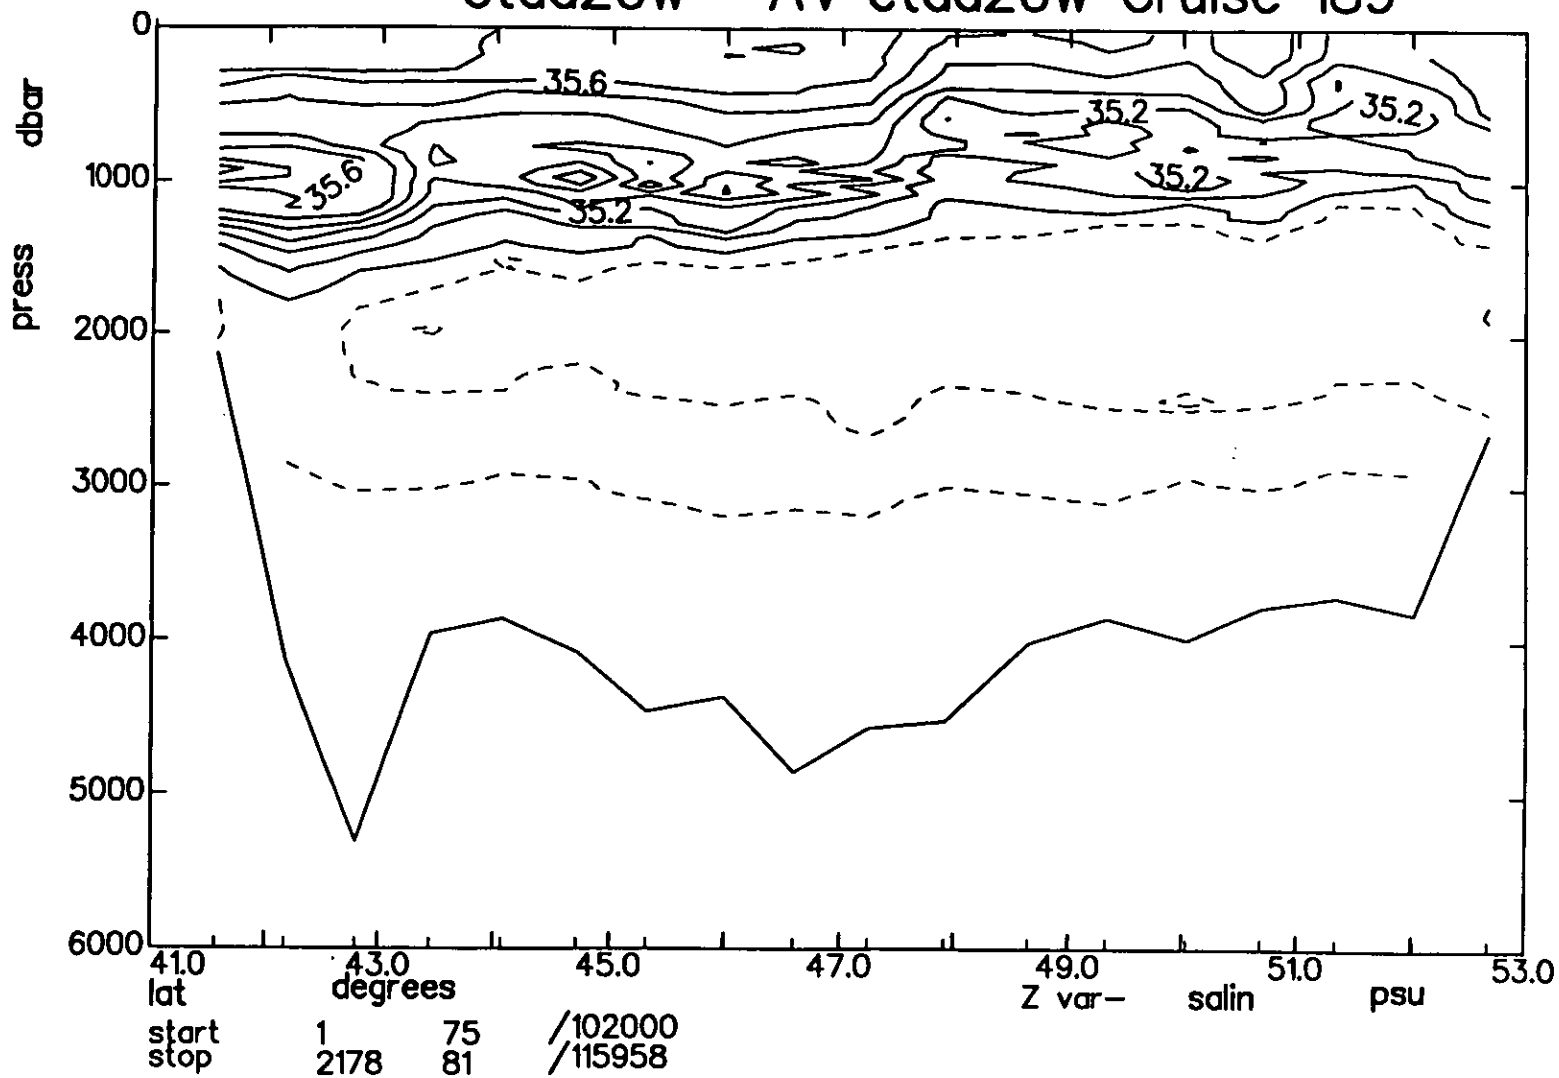


ctdd20w AV ctdd20w Cruise 189


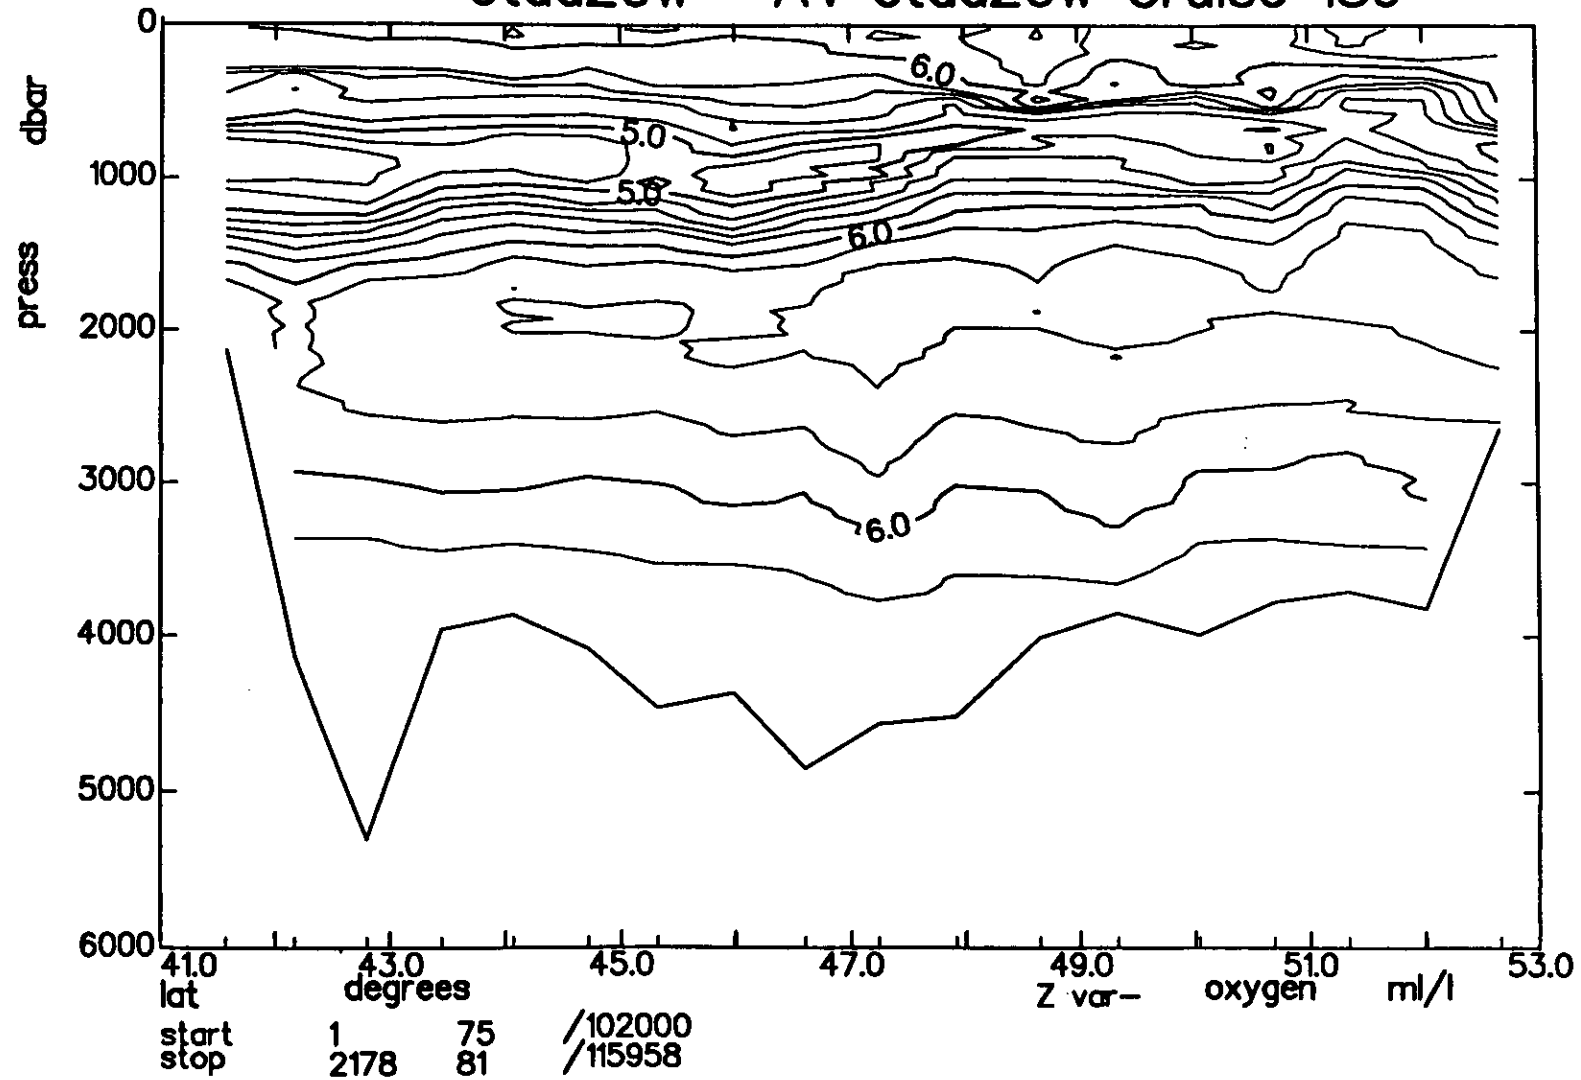


ctdd20w AV ctd20w Cruise 189

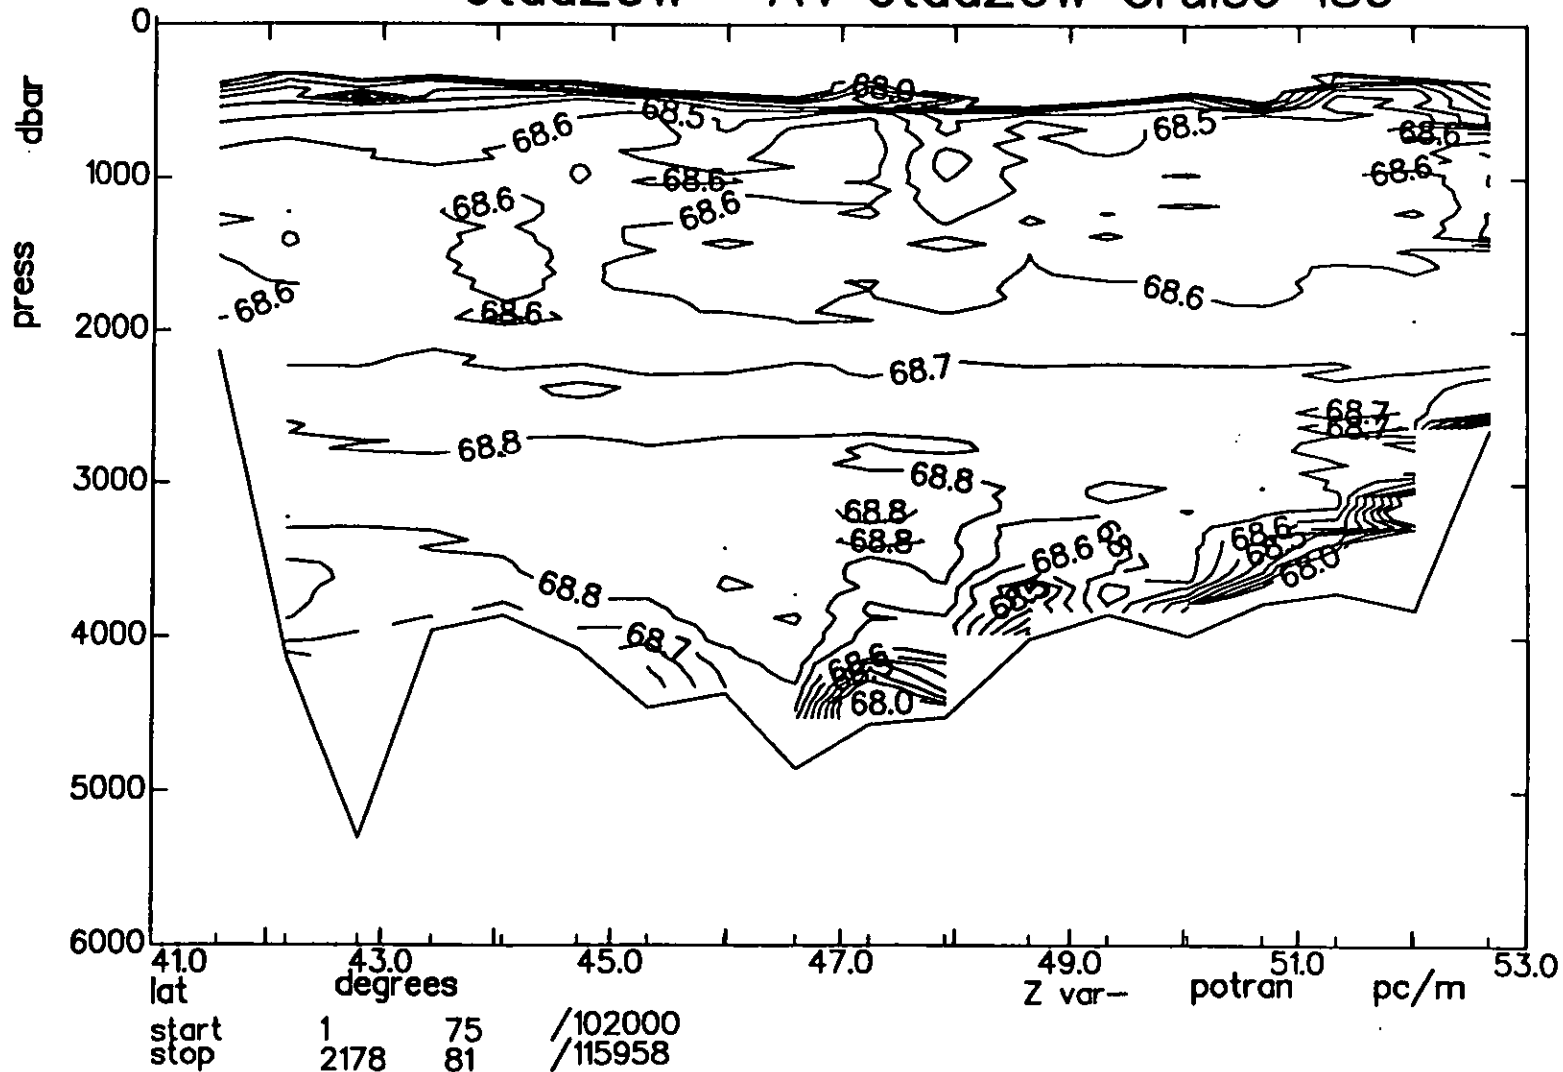


ctdd20w CD ctdd20w Cruise 189

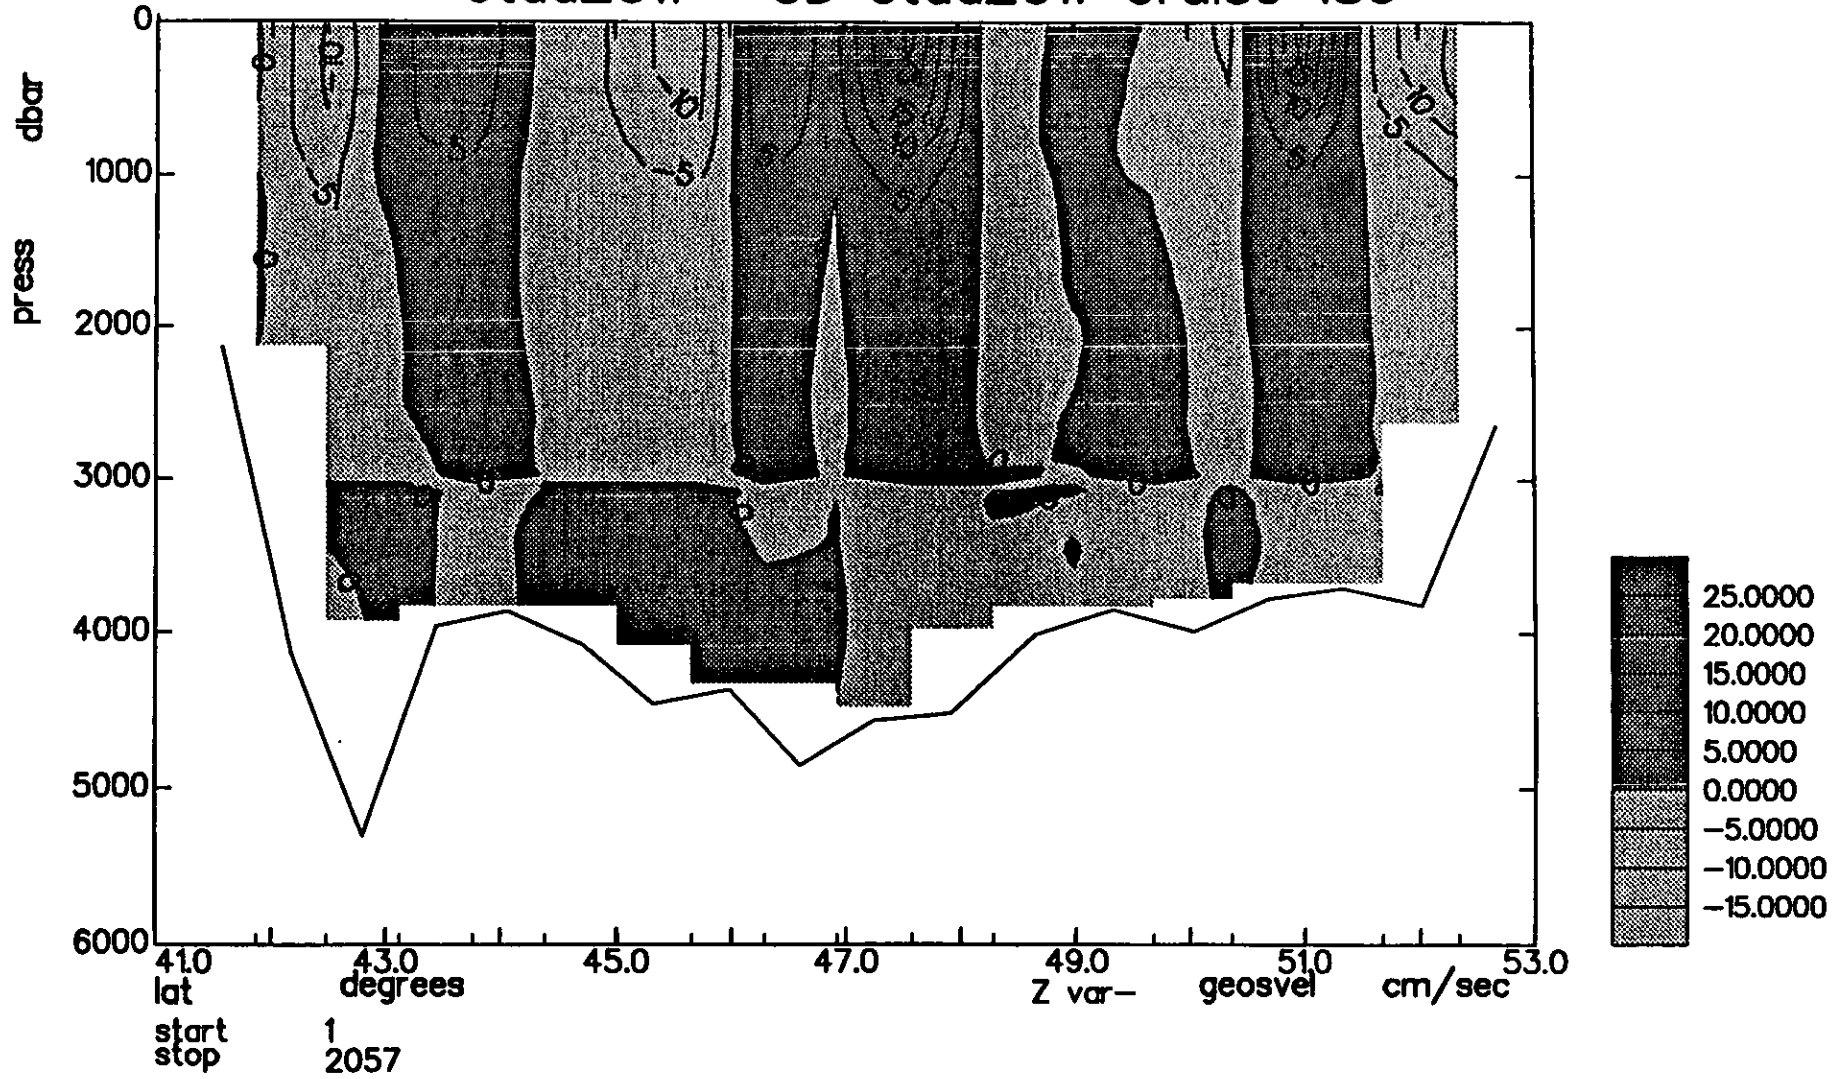


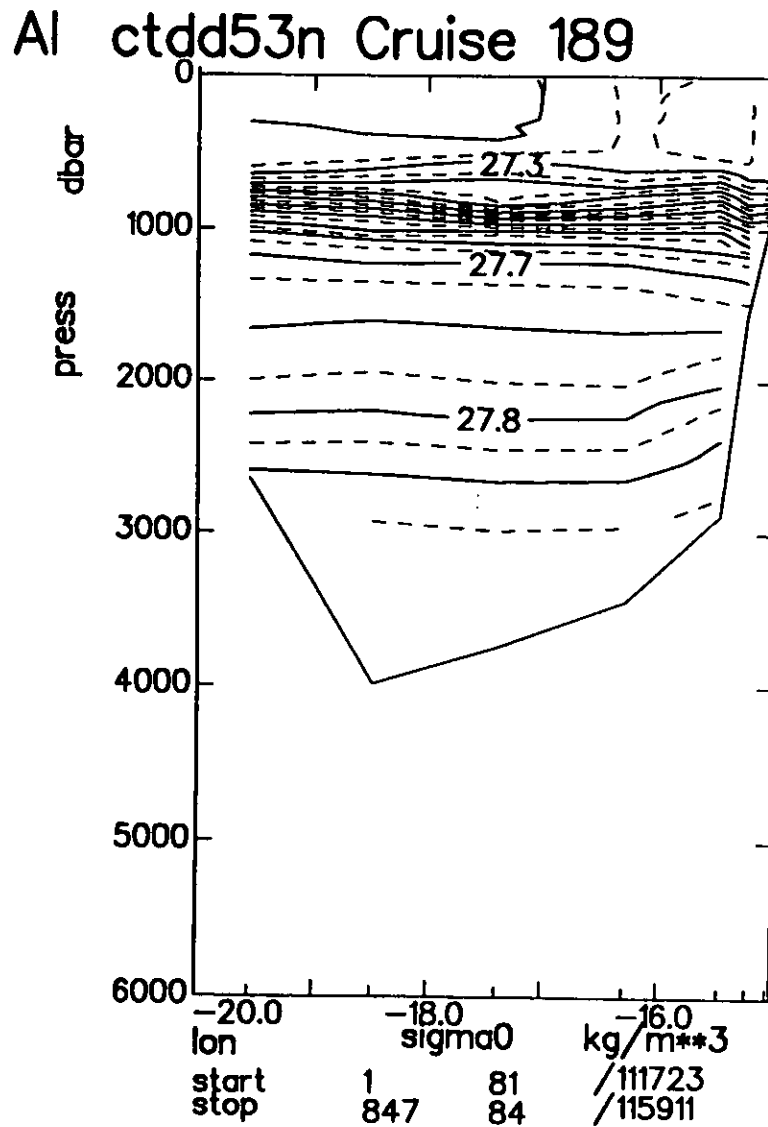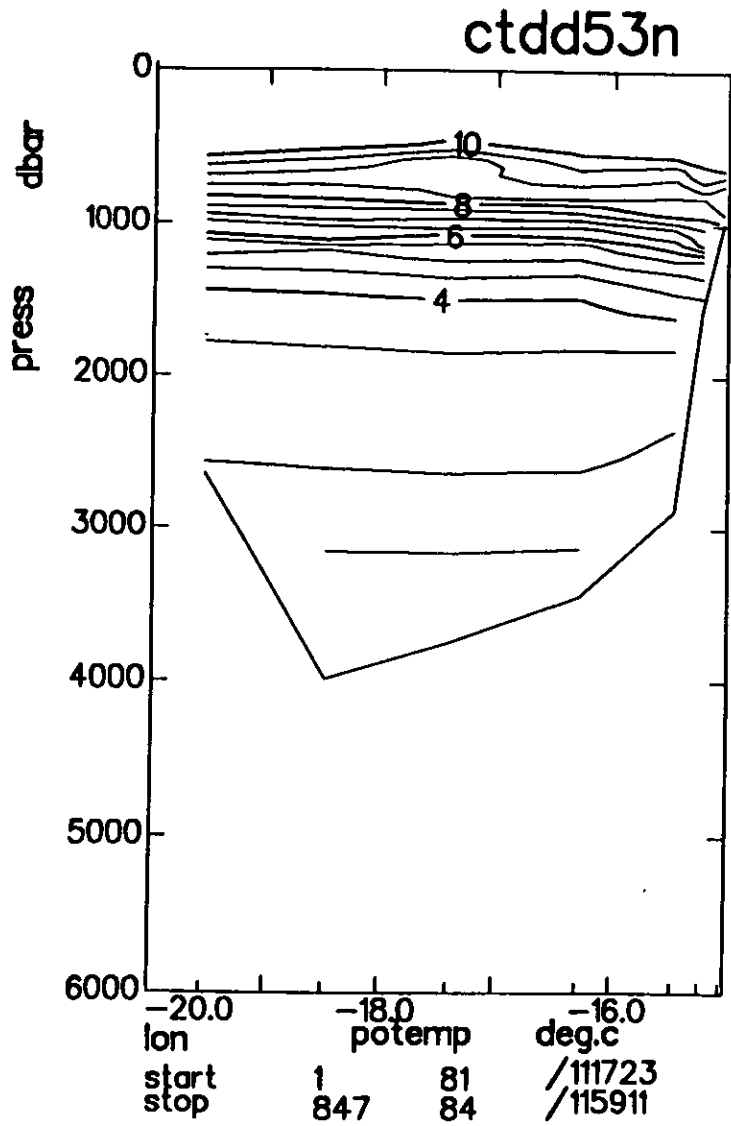

ctdd53n

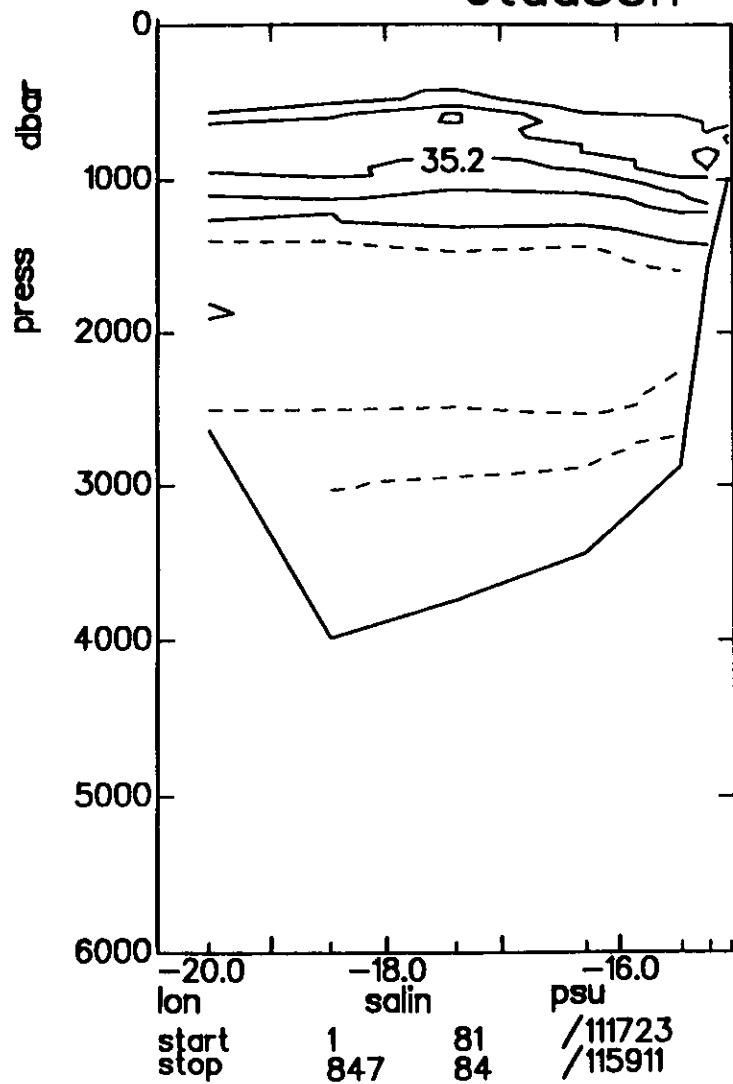




AI ctd53n Cruise 189


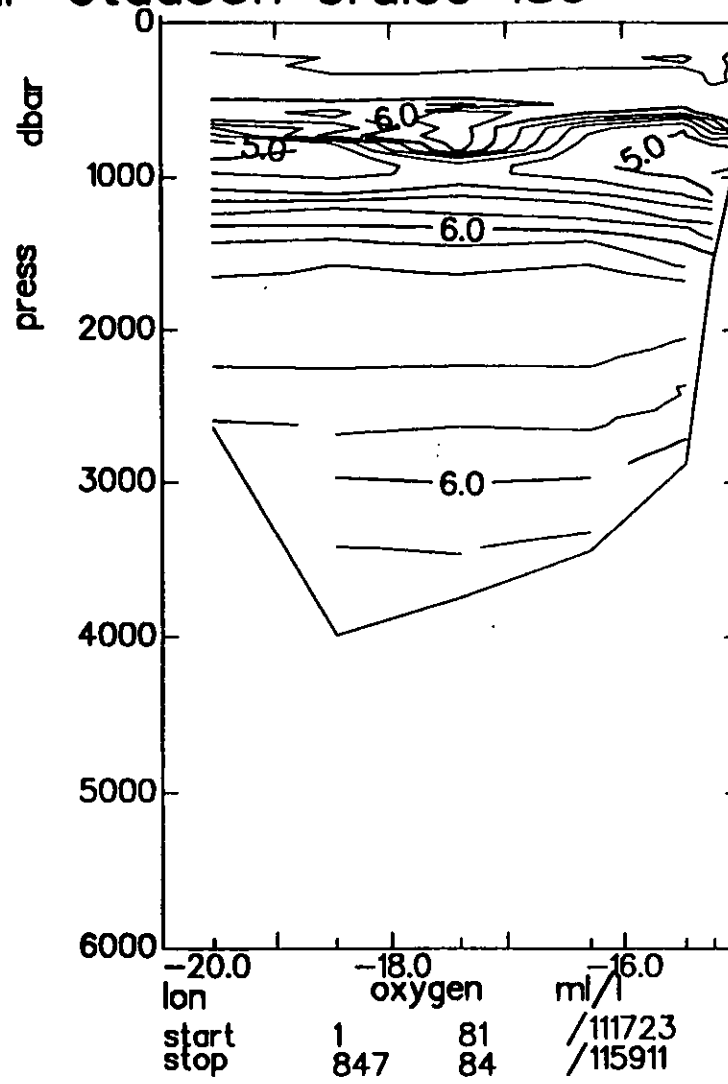


ctdd53n

Al ctd53n Cruise 189

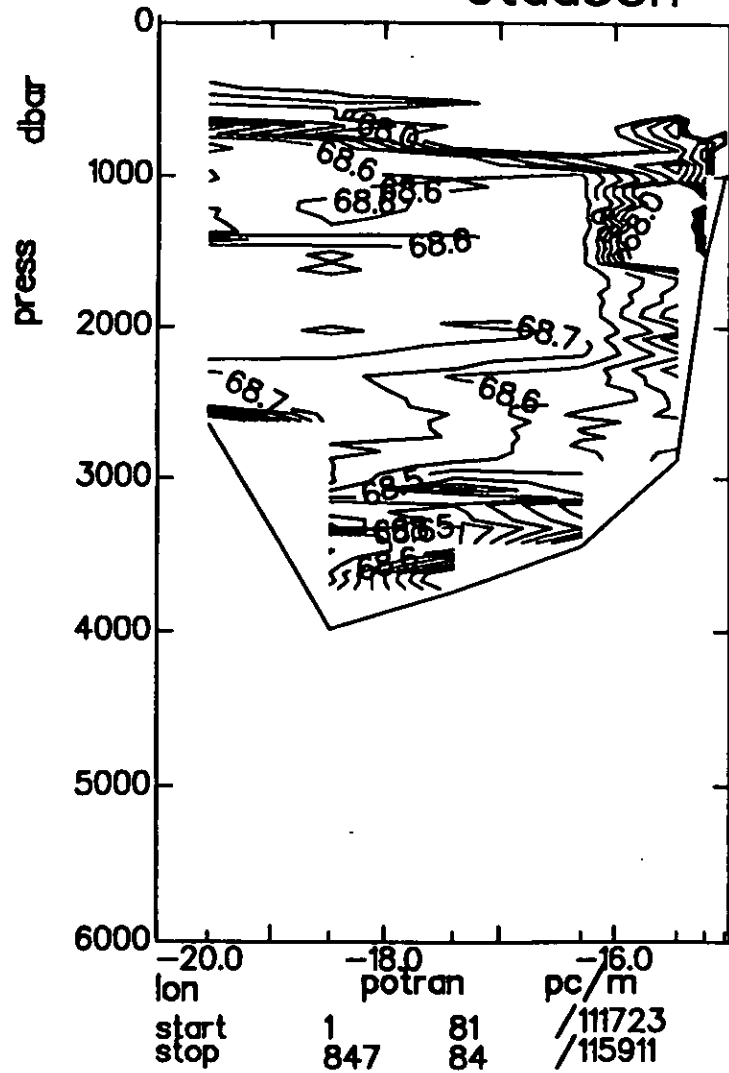


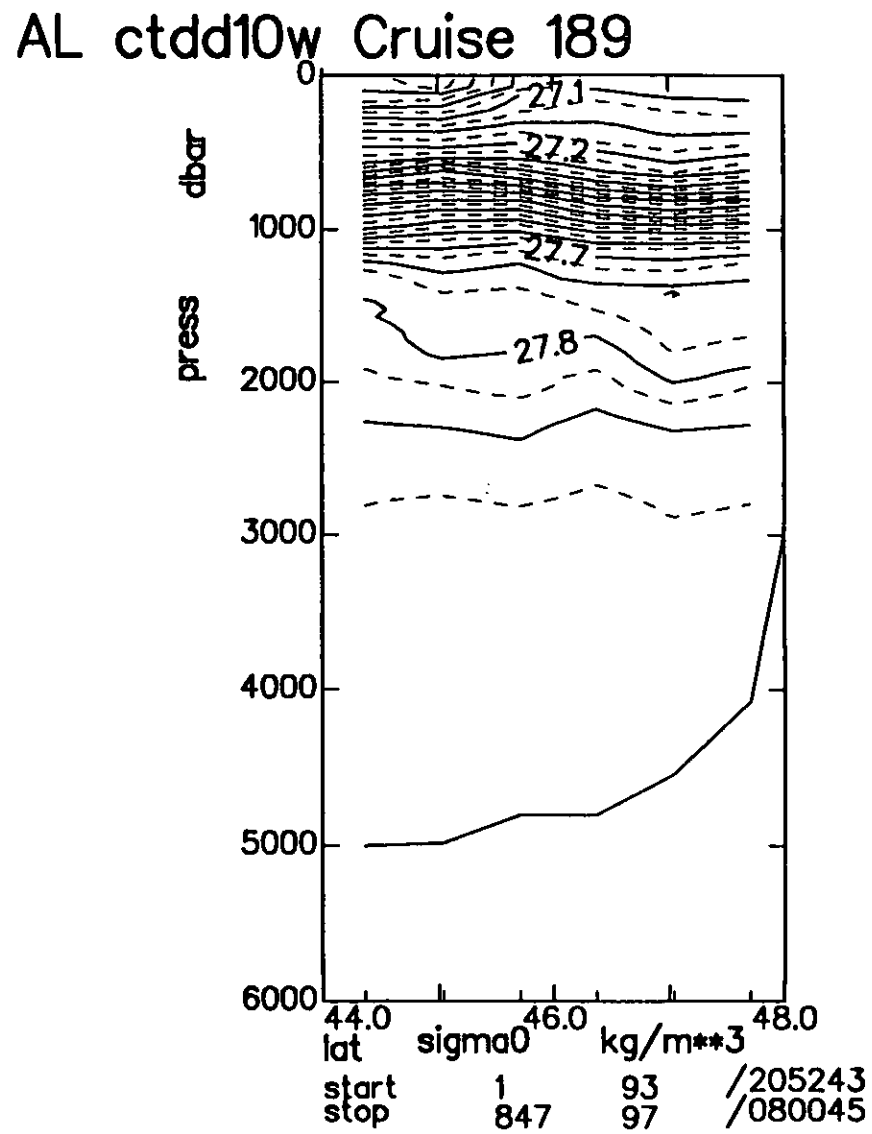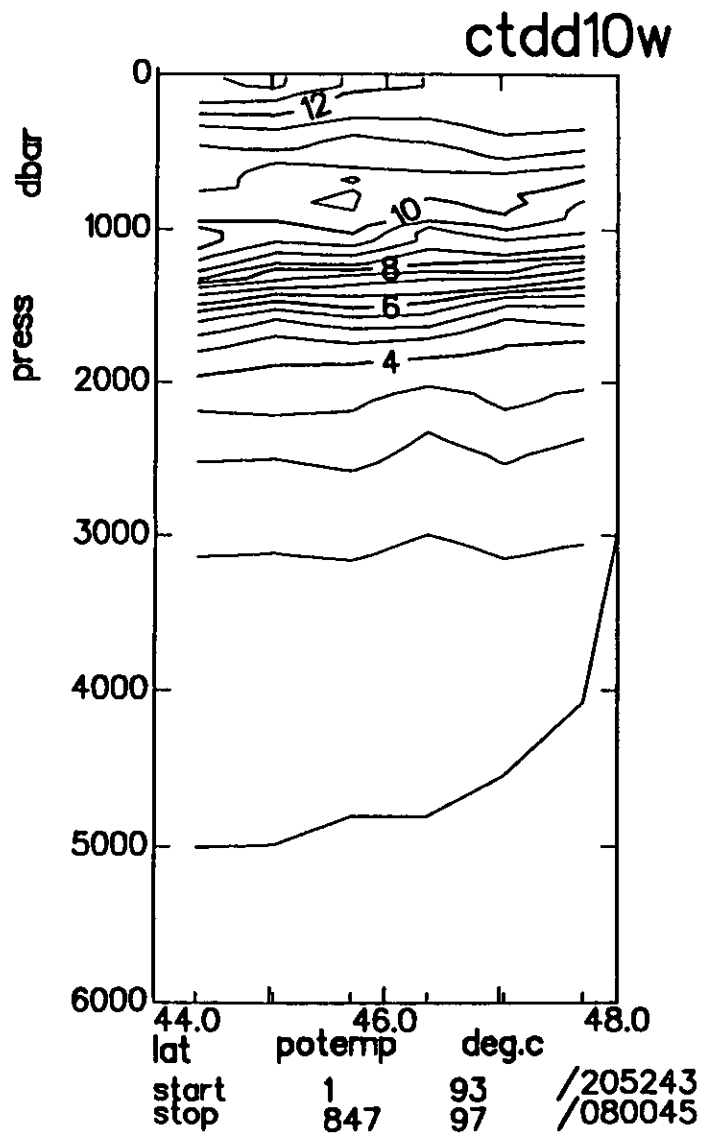

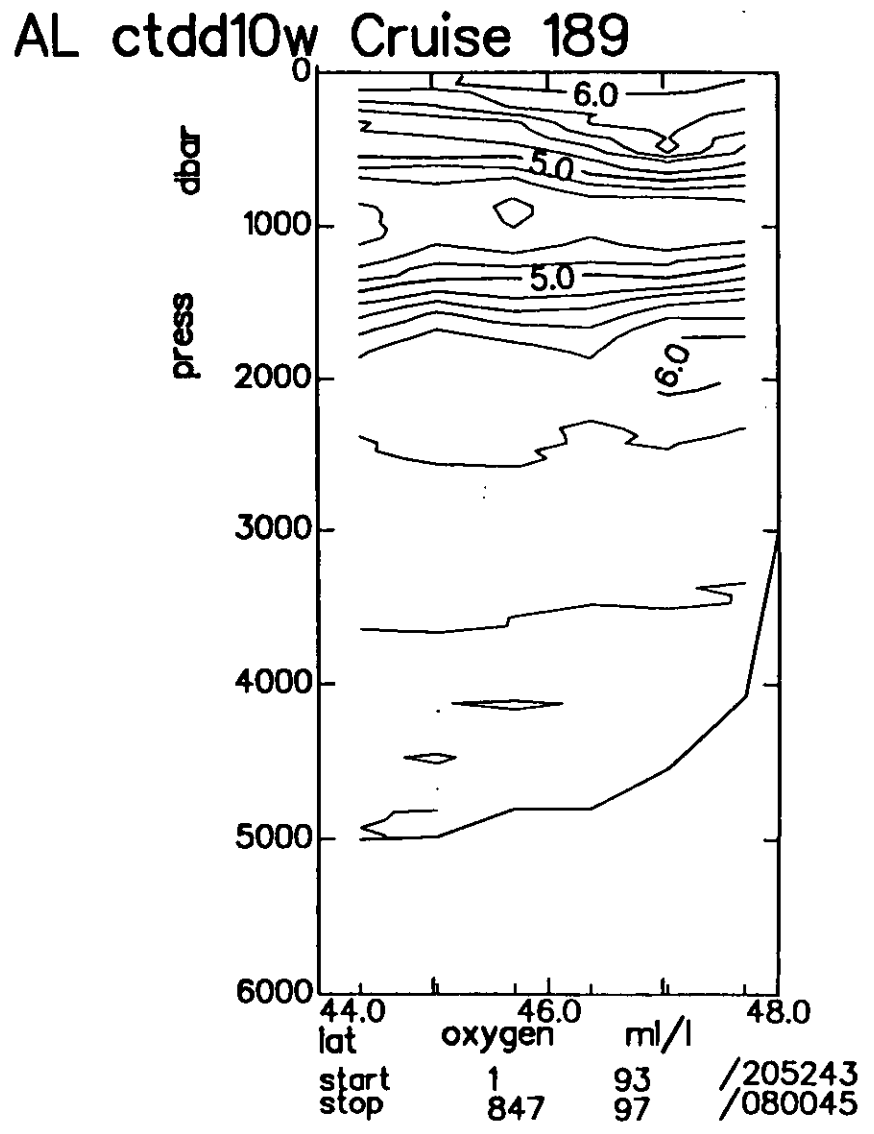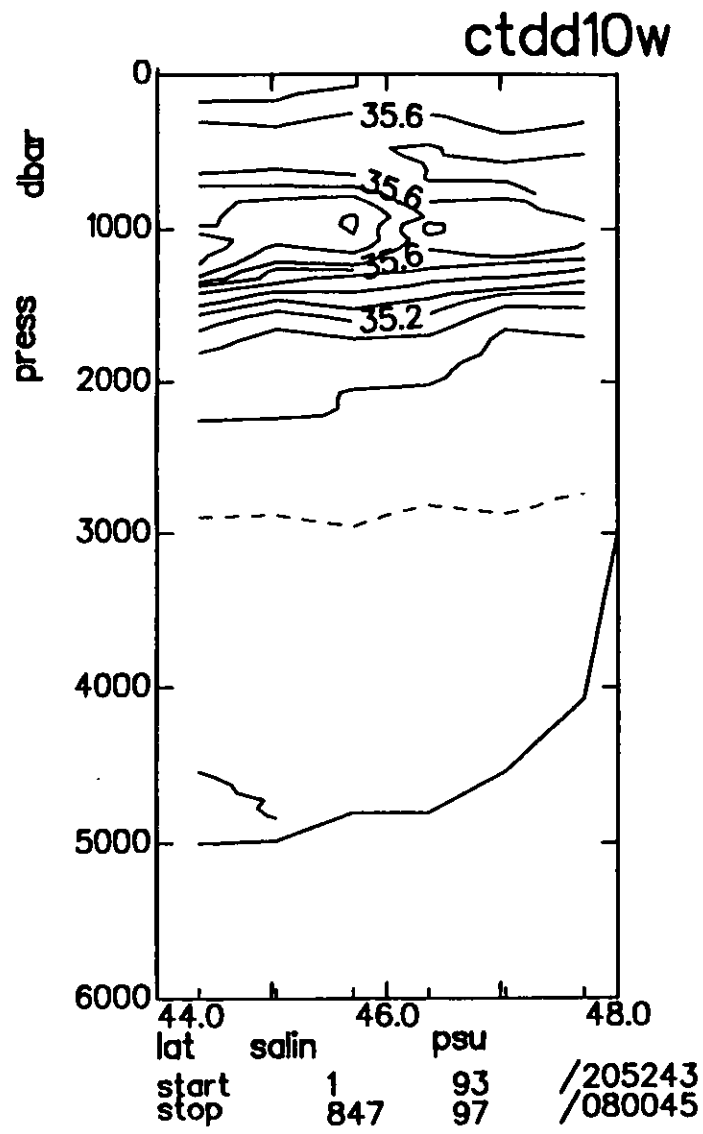



ctdd10w

AL ctdd10w Cruise 189

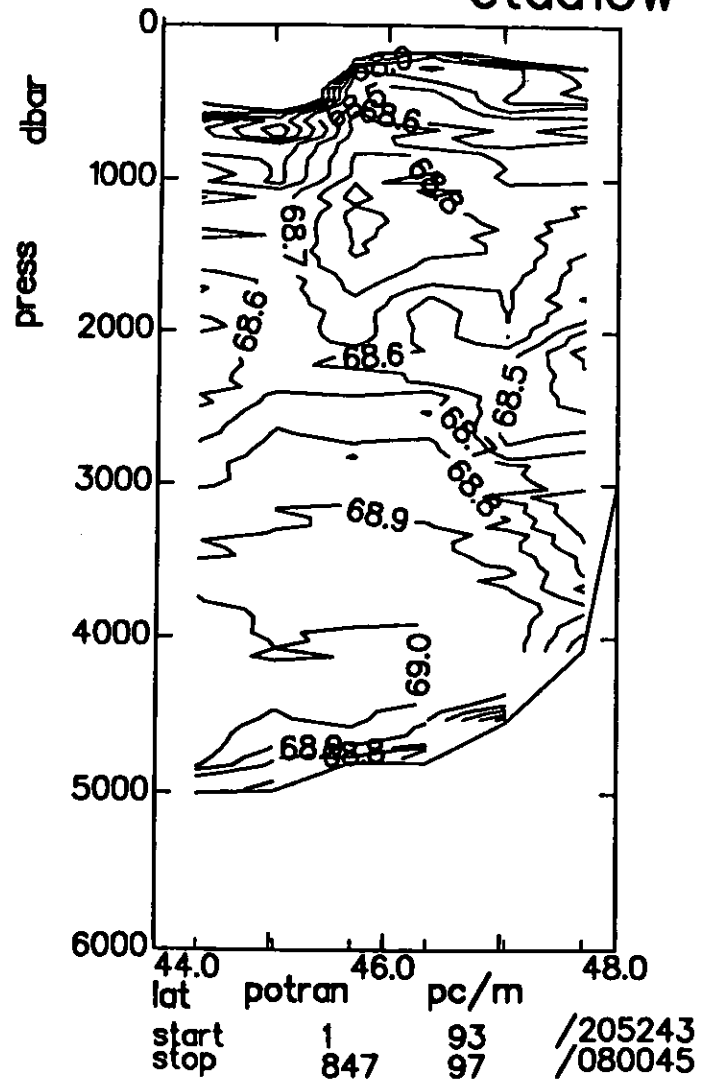


ctdd09w


AN ctd09w Cruise 189

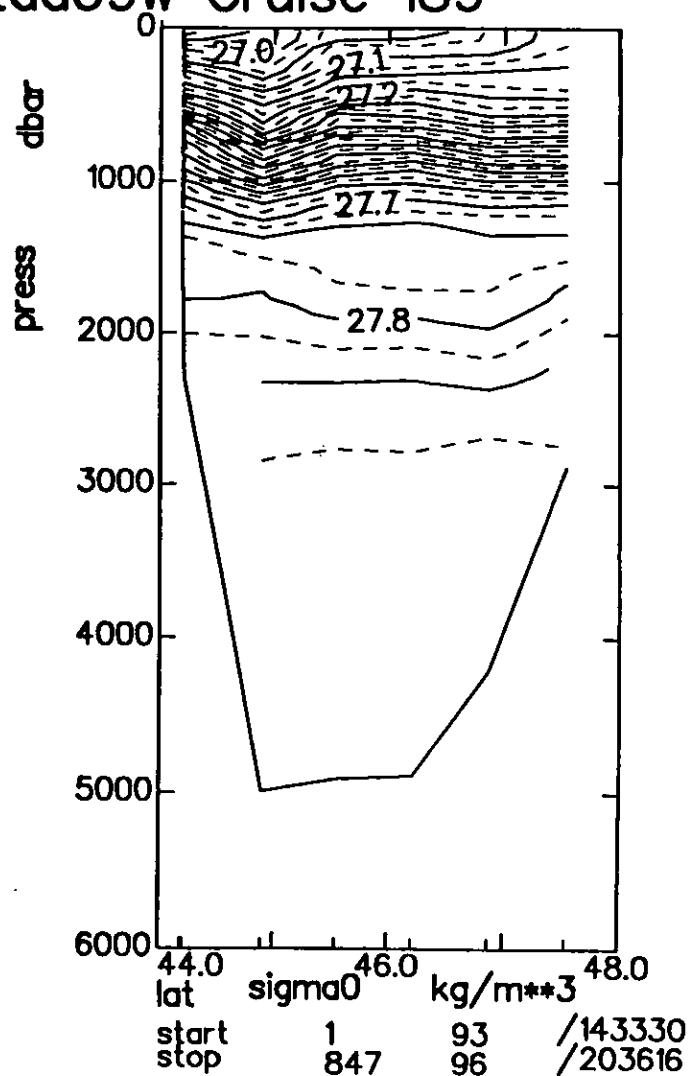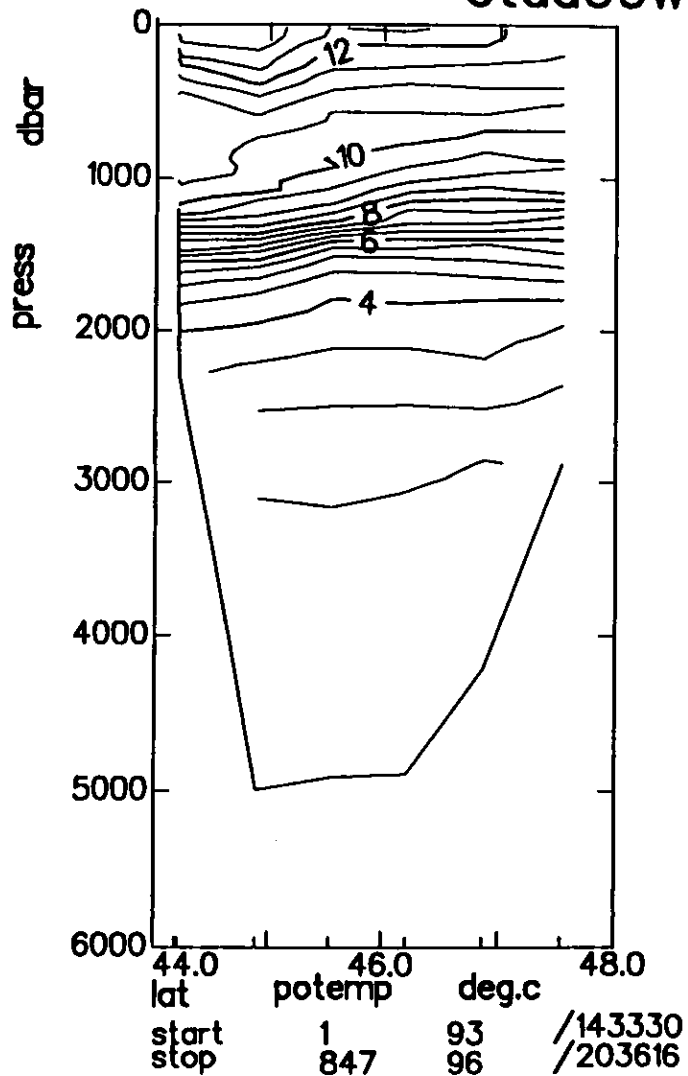

ctdd09w

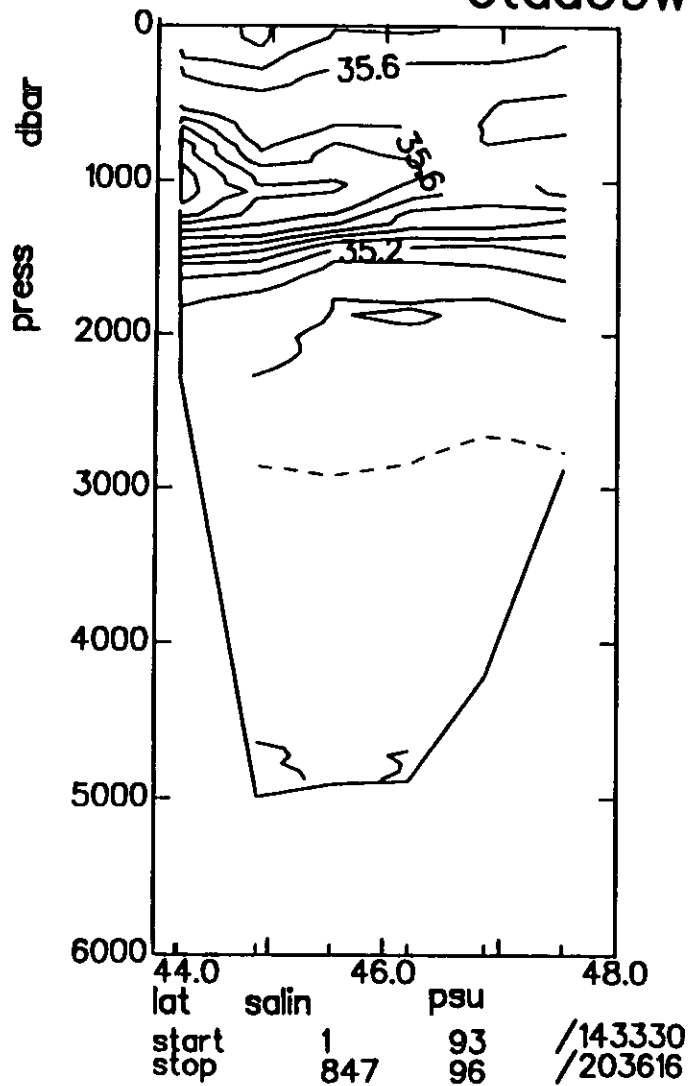


AN ctdd09w Cruise 189

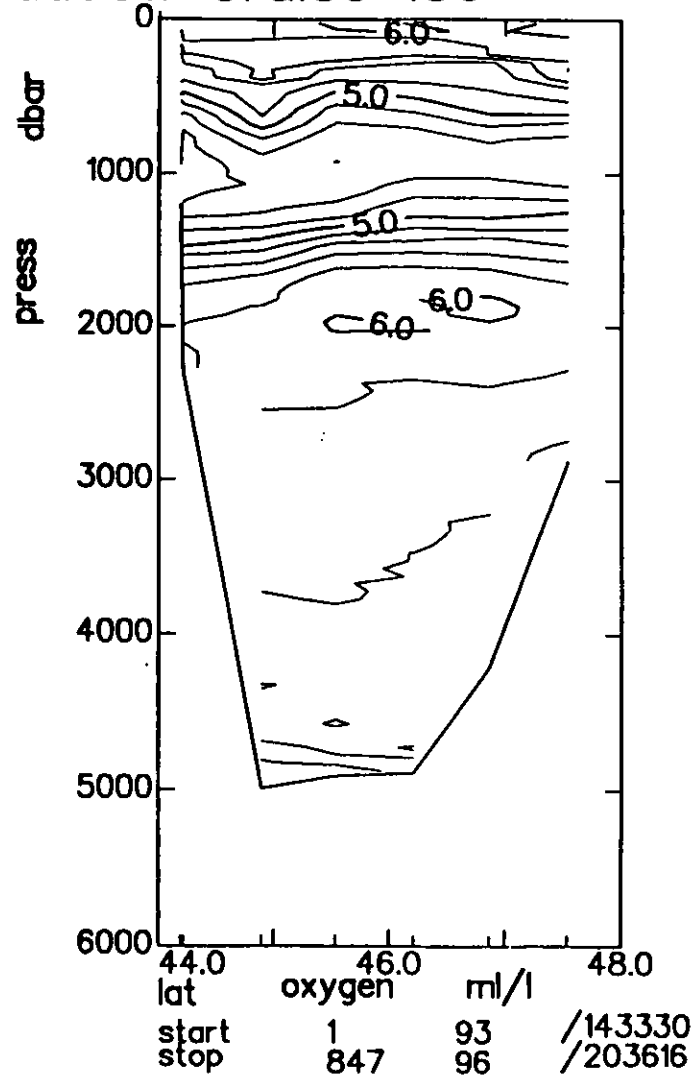



ctdd09w

AN ctdd09w Cruise 189

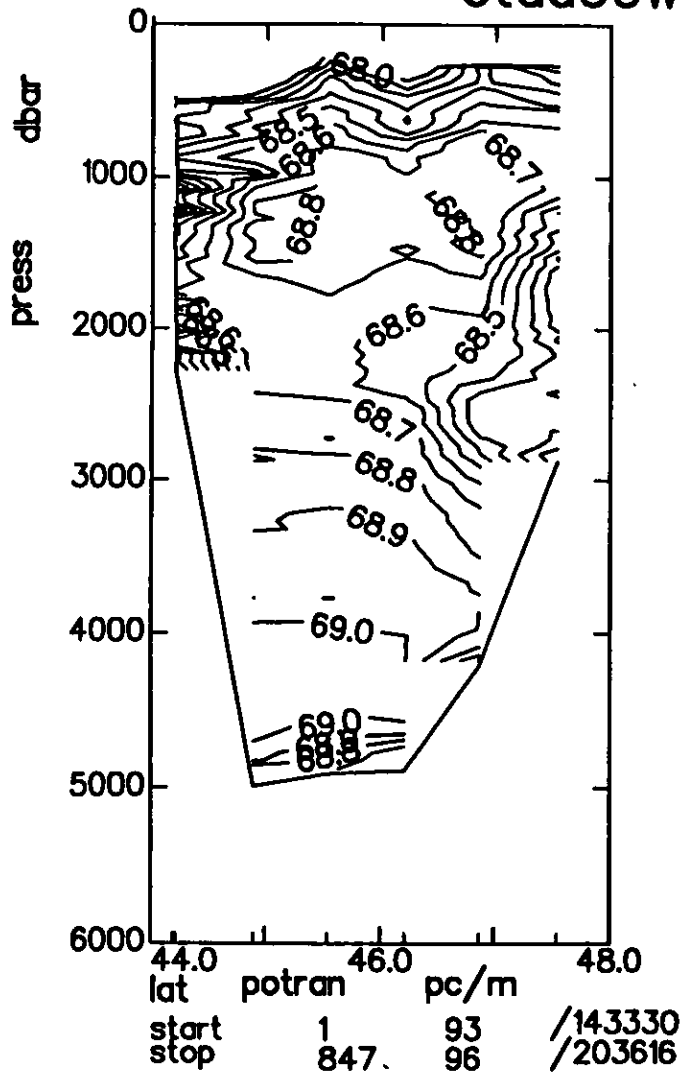



ctdd08w

AF ctdd08w Cruise 189

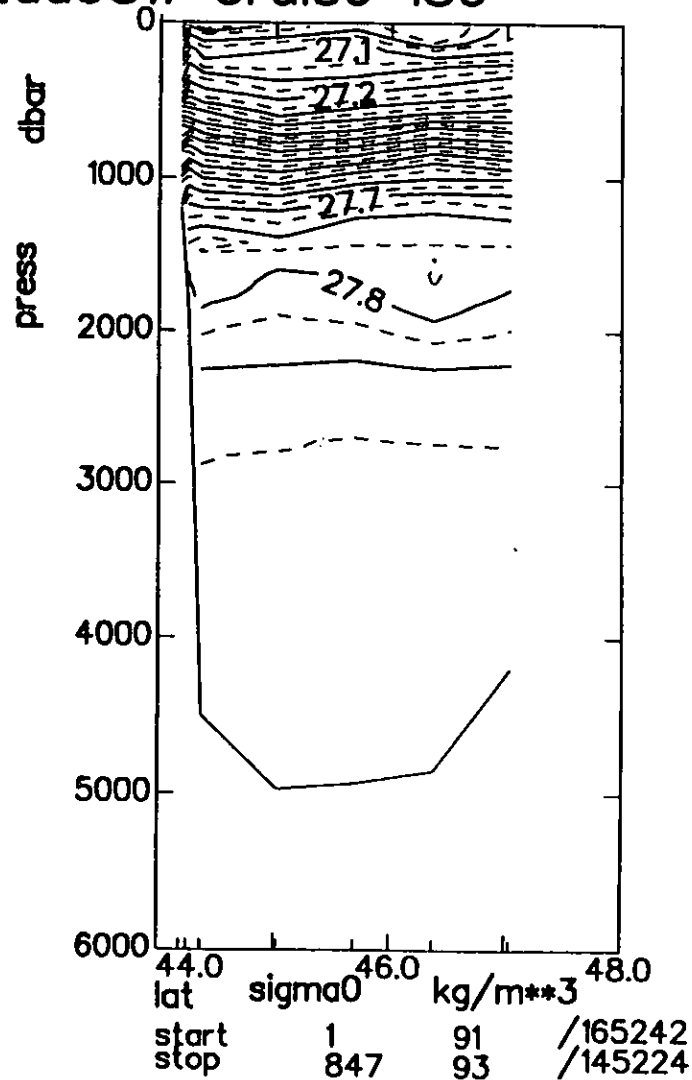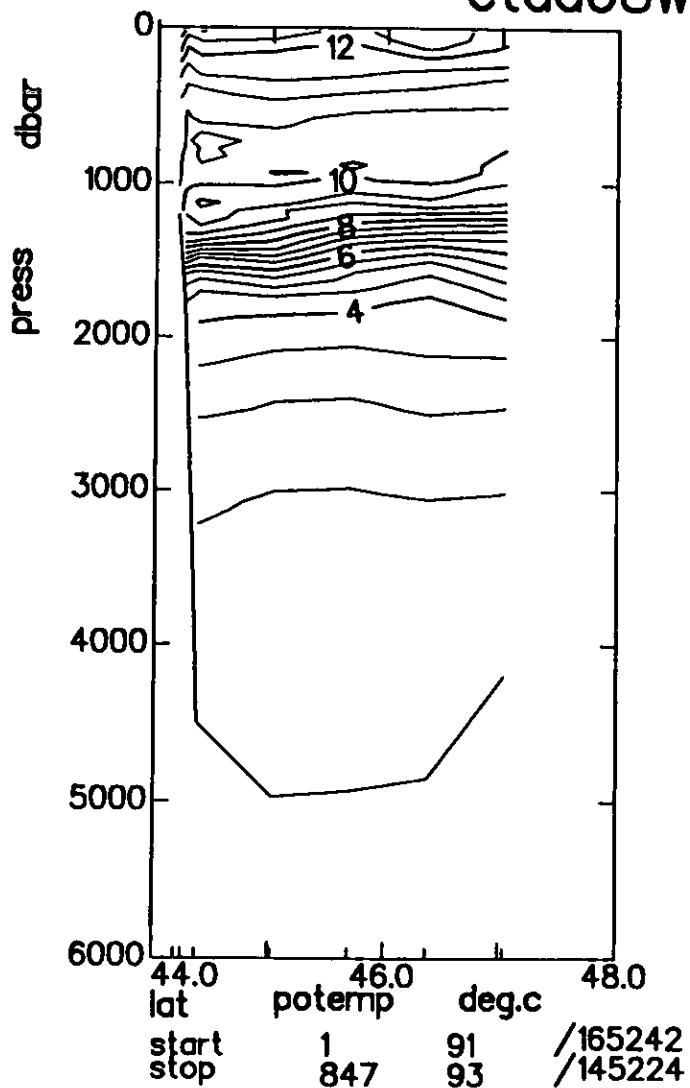

ctdd08w

AF ctd08w Cruise 189

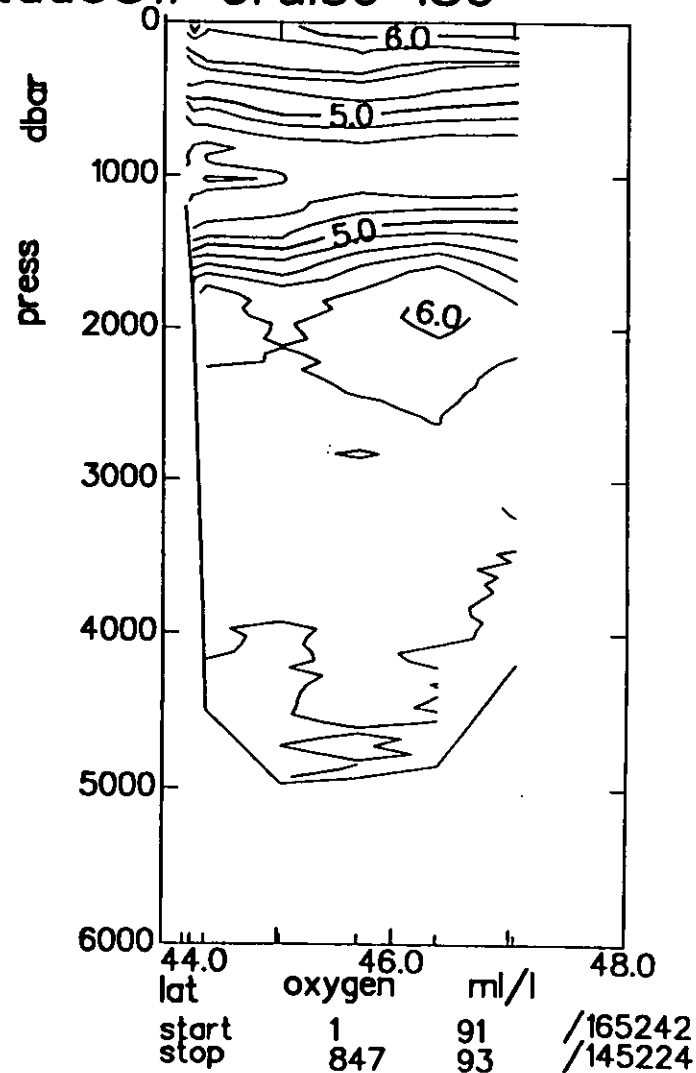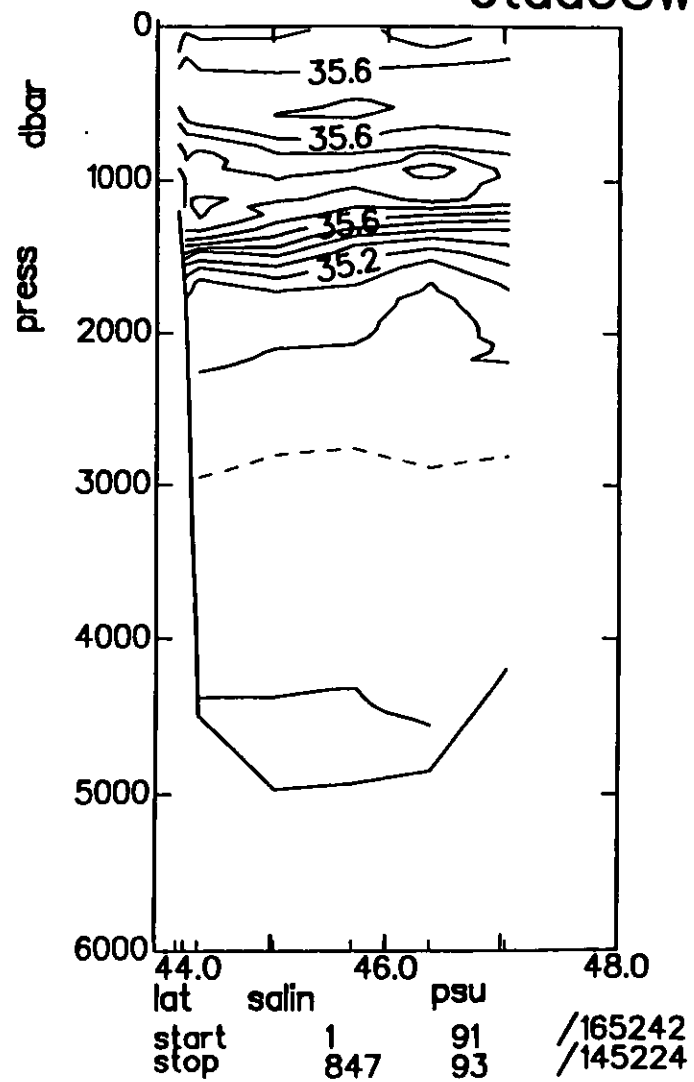

ctdd08w AF ctdd08w Cruise 189

